


F110 WMS FULLY RUGGED TABLET



- 11th Generation Intel® Core™ i3 Processor
- Thunderbolt™ 4 brings lightning speed and performance
- 11.6 FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen

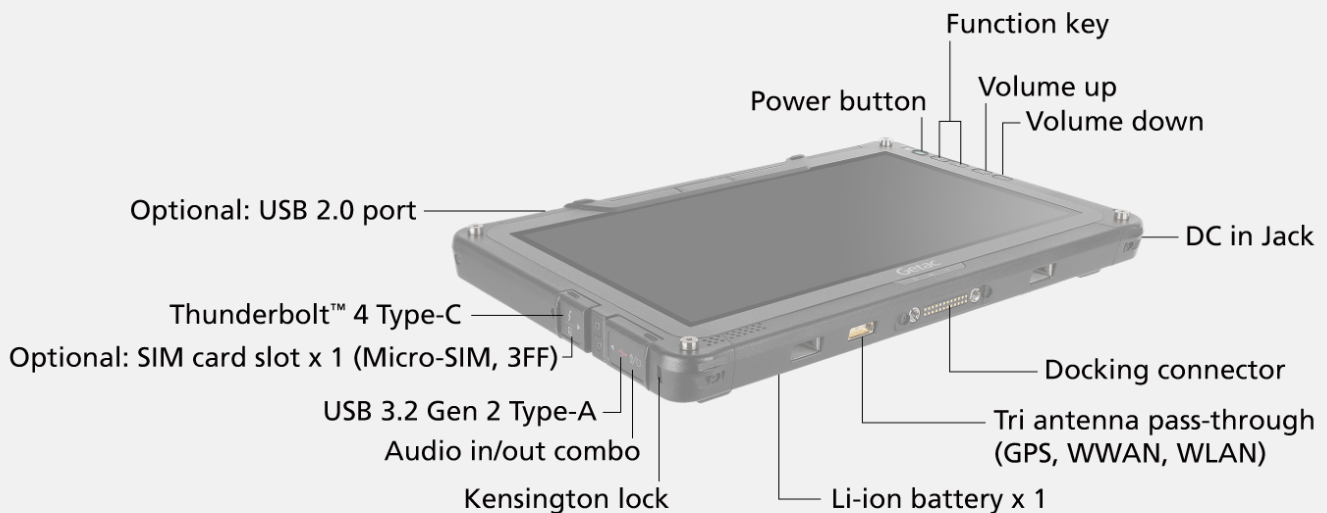

SPECIFICATIONS

Generation

G6

Operating System

Windows 10 IoT

Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor
Max. 4.1GHz with Intel® Turbo Boost
Technology - 6MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
256GB PCIe NVMe SSD

Keyboard

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Expansion Slot

Optional: USB 2.0 port

I/O Interface

Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ⁱ
RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2) ⁱⁱ
Optional: 4G LTE mobile broadband
with integrated GPS ⁱ

Security Feature

TPM 2.0
Kensington lock

Power

Li-ion battery (11.4V, typical 2680mAh;
min. 2640mAh) x 1 ^{iii, iv}

Dimension (W x D x H) & Weigh

314 x 207 x 25mm (12.4" x 8.15" x 0.98")
1.35kg (2.97lbs) ^v

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{vi}
Vibration & 6ft (1.8m) drop resistant

Environmental Specification

Temperature ^{vii} :
- Operating:
-29°C to 63 °C / -20°F to 145°F
(when docked and/or powered by
an external power supply)
-10°C to 63 °C / 14°F to 145°F
(when undocked and only powered
by one battery)

- Storage: -51°C to 71 °C / -60°F to 160°F
Humidity: - 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Driving Safety Utility (trial version)
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{viii}

Accessories

Battery (11.4V, typical 2680mAh;
min. 2640mAh)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.4V, typical 2680mAh;
min. 2640mAh)
High capacity Li-ion battery (11.1V,
typical 4200mAh; min.4080mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC, 50 / 60Hz)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle ^{ix}
Vehicle dock ^{ix}
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

Bumper-to-Bumper warranty

Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-to-Bumper
warranty, to help minimize your
enterprise IT costs. Bumper-to-Bumper is your
hassle-free guarantee.
That means you can depend on us to have your
unit back in service within days.

Standard

3 years Bumper-to-Bumper

F110 WMS FULLY RUGGED TABLET

- I. Units with 4G LTE option come with an embedded SIM card slot.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. At the point of purchase, the second battery will be fitted with a dummy battery.
- IV. The second battery is sold separately; units with two batteries installed support the LifeSupport battery swappable technology.
- V. Weight and dimensions vary from configurations and optional accessories.
- VI. MIL-STD-461 90W AC adapter sold separately.
- VII. Tested by an independent third-party test lab following MIL-STD-810H.
- VIII. Models require the embedded GPS module.
- IX. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI 1.4	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,
Shropshire TF3 3BJ, United Kingdom

Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com |

www.getac.com/en/

Copyright © 2023 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.