


## B360 FULLY RUGGED LAPTOP



- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 12<sup>th</sup> Generation Intel® Core™ Processor
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology
- Thunderbolt™ 4 brings lightning speed and performance



B360 3D demo

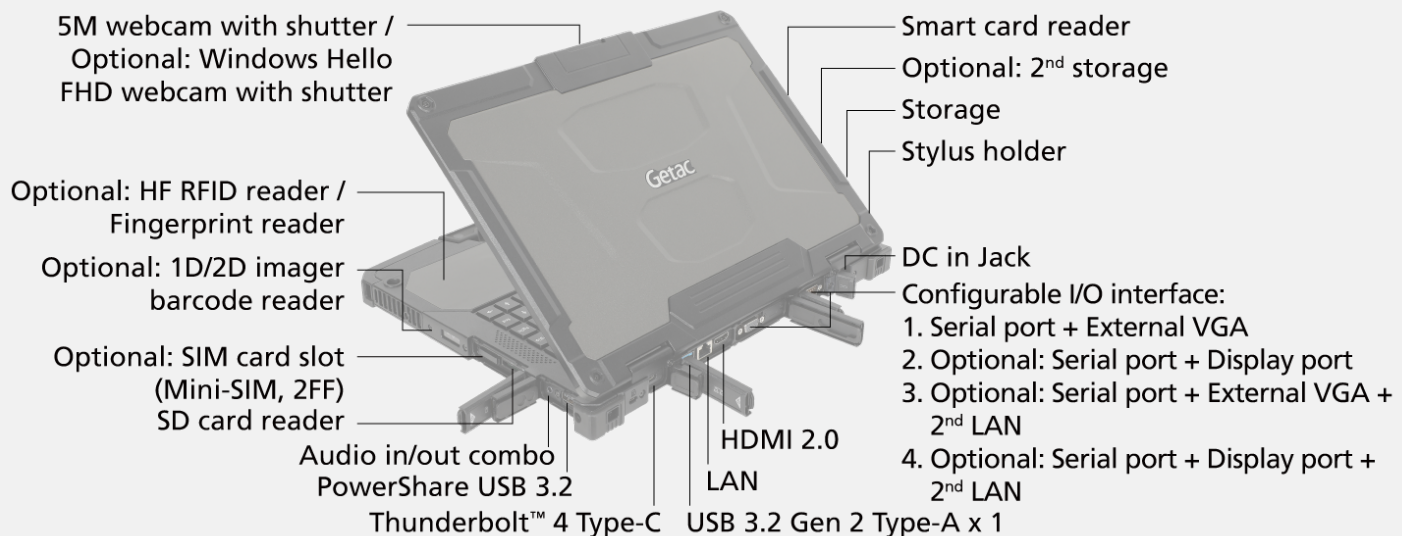

## SPECIFICATIONS

### Generation

G2

### Operating System

Windows 11 Pro

### Mobile Computing Platform

Intel® Core™ i5-1240P Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

### Platform options:

Intel® Core™ i5-1250P vPro® Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Core™ i7-1260P Processor

Max. 4.7GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ i7-1270P vPro® Processor

Max. 4.8GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor

Max. 4.8GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

### VGA Controller

Intel® Iris® Xe Graphics<sup>i</sup>

### Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)

Protection film

1,400 nits LumiBond display with  
Getac sunlight readable technology

Capacitive multi-touch screen

### Storage & Memory

8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2<sup>nd</sup> storage<sup>ii</sup>: 256GB / 512GB /  
1TB / 2TB PCIe NVMe SSD

### Keyboard

LED backlit membrane keyboard

### Pointing Device

Touchscreen

- Capacitive multi-touch screen

Touchpad

- Touchpad with two buttons

### Expansion Slot

Smart card reader x 1

Optional: SD card reader x 1

Optional: 1D / 2D imager barcode reader

### I/O Interface

5M webcam x 1<sup>iv</sup>

Audio in/out combo x 1

DC in Jack x 1

PowerShare USB 3.2 x 1

USB 3.2 Gen 2 Type-A x 1

Thunderbolt™ 4 Type-C x 1

LAN (RJ45) x 1

HDMI 2.0 x 1

Docking connector x 1

Optional: SIM card slot x 1 (Mini-SIM, 2FF)<sup>iii</sup>

Optional: Windows Hello face-authentication

FHD camera (front-facing) x 1<sup>iv</sup>

Optional: RF antenna pass-through for GPS, WWAN  
and WLAN

Configurable I/O options<sup>v</sup>:

1. Serial port (9-pin; D-sub) x 1 + External VGA

(15-pin; D-sub) x 1

2. Serial port (9-pin; D-sub) x 1 + Display port x 1

3. Serial port (9-pin; D-sub) x 1 + External VGA

(15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1

4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2<sup>nd</sup>

LAN (RJ45) x 1

### Communication Interface

10/100/1000 base-T Ethernet

Intel® Wi-Fi 6E AX211, 802.11ax

Bluetooth (v5.3)<sup>vi</sup>

Optional: Dedicated GPS with L1/L5<sup>vii</sup>

Optional: 4G LTE mobile broadband

with integrated GPS<sup>iii, viii</sup>

Optional: 5G Sub-6 with integrated L1/L5 GPS<sup>vii, viii</sup>

### Security Feature

TPM 2.0

Kensington lock

Smart card reader

Optional: Fingerprint reader<sup>ix</sup>

Optional: HF RFID reader<sup>x, x</sup>

Optional: Windows Hello face-authentication

FHD camera (front-facing)<sup>iv</sup>

### Power

AC adapter (90W, 100-240VAC, 50/60Hz)  
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2  
LifeSupport battery swappable technology

### Dimension (W x D x H) & Weight

342 x 281 x 34.9 mm (13.46" x 11.06" x 1.37" )  
2.32kg (5.11lbs)<sup>x</sup>

### Rugged Feature

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified<sup>xii</sup>

Vibration & 6ft (1.8m) drop resistant

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)<sup>xiii</sup>

Optional: Salt fog certified

### Environmental Specification

Temperature<sup>xiv</sup>:

- Operating: -29°C to 63°C / -20°F to 145°F<sup>xv</sup>

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

### Pre-installed Software

Getac Utility

Getac Geolocation

Getac Barcode Manager<sup>xvi</sup>

Optional: Absolute Persistence<sup>®</sup>

### Optional software

Getac Driving Safety Utility

Getac Device Monitoring System (GDMS)

Getac VGPS Utility<sup>xvii</sup>

### Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)

AC adapter (90W, 100-240VAC)

Capacitive stylus with tether

### Optional:

Carry bag

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (90W, 100-240VAC)

Office dock AC adapter (120W, 100-240VAC)

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Capacitive stylus with tether

Protection film

Vehicle cradle<sup>xviii</sup>

Vehicle dock<sup>xviii</sup>

Office dock

DS100 USB-C docking station

Spare SSD kit

100W Type-C adapter

# B360 FULLY RUGGED LAPTOP

## Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

### Standard

Garantie Bumper-to-Bumper de 3 ans

- I. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics.
- II. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- III. Units with 4G LTE option come with an embedded SIM card slot.
- IV. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- V. External VGA and Display port are mutually exclusive.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VIII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IX. Fingerprint reader and HF RFID reader are mutually exclusive.
- X. HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XI. Weight and dimensions vary from configurations and optional accessories.
- XII. MIL-STD-461 90W AC adapter sold separately.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVI. Available when barcode reader option is selected.
- XVII. Models require either embedded or standalone GPS module.
- XVIII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140  
Villebon sur Yvette Tel: +33 160 12 80 60  
Sales-Getac-France@getac.com |  
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.