


## V110 FULLY RUGGED LAPTOP



- 12th Generation Intel® Core™ i7 / i5 vPro® Processor
- 11.6" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with Intel® vPro®, Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- LifeSupport battery swappable technology



V110 3D Demo

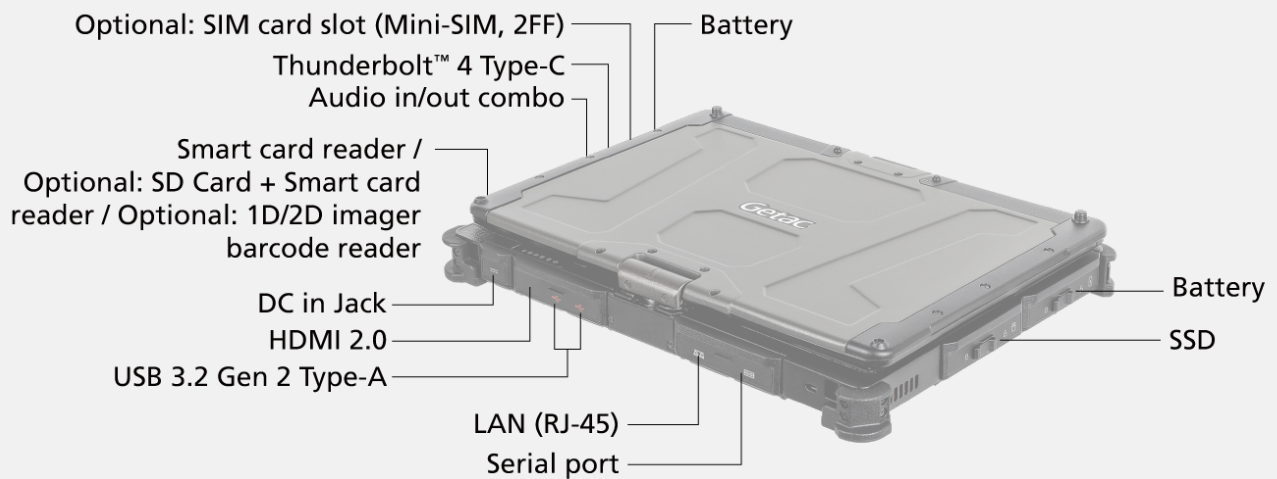

## SPECIFICATIONS

### Generation

G7

### Operating System

Windows 11 Pro

### Mobile Computing Platform

Intel® Core™ i5-1235U Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

### Platform options:

Intel® Core™ i5-1245U vPro® Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor  
Max. 4.7GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor  
Max. 4.8GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

### VGA Controller

Intel® Iris® X<sup>e</sup> Graphics<sup>i</sup>

### Display

11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

### Storage & Memory

8GB DDR4  
Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

### Keyboard

LED backlit membrane keyboard  
Optional: Rubber keyboard  
Power button  
5 tablet programmable buttons

### Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional: Dual mode touchscreen  
(multi-touch and digitizer)  
Touchpad  
- Glide touchpad with left-click and right-click buttons

### Expansion Slot

Smart card reader<sup>ii</sup>  
Optional: SD Card + Smart card reader<sup>ii</sup>  
Optional: 1D/2D imager barcode reader<sup>ii</sup>

### I/O Interface

5M webcam x 1<sup>iii</sup>  
Audio in/out combo x 1  
DC in Jack x 1  
Thunderbolt™ 4 Type-C x 1  
USB 3.2 Gen 2 Type-A x 2  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Serial port (9-pin; D-sub) x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Mini-SIM, 2FF)<sup>iv</sup>  
Optional: Windows Hello face-authentication  
FHD camera (front-facing) x 1<sup>iii</sup>  
Optional: RF antenna pass-through for GPS,  
WWAN and WLAN  
Optional: 8M pixels auto focus rear camera x 1

### Communication Interface

10/100/1000 base-T Ethernet  
Intel® Wi-Fi 6E AX211, 802.11ax  
Bluetooth (v5.3)<sup>v</sup>  
Optional: Dedicated GPS<sup>vii</sup>  
Optional: 4G LTE mobile broadband<sup>vi, iv, xvi</sup>  
Optional: 5G Sub-6<sup>iv, vi, xvii</sup>  
Dual SIM (Mini-SIM 2FF and e-SIM)<sup>xi</sup>

### Security Feature

TPM 2.0  
Kensington lock  
Optional: Intel® vPro® Technology  
Optional: Fingerprint reader<sup>ii</sup>  
Optional: HF RFID reader<sup>ii</sup>  
Smart card reader  
Optional: Windows Hello face-authentication  
FHD camera (front-facing)<sup>iii</sup>

### Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2  
LifeSupport battery swappable technology

### Dimension (W x D x H) & Weight

313 x 238 x 39mm (12.32" x 9.37" x 1.53")  
2.1kg (4.63lbs)<sup>viii</sup>

### Rugged Feature

MIL-STD-810H certified  
IP65 certified  
MIL-STD-461G certified<sup>ix</sup>  
Vibration 8amp; 4ft (1.2m) drop resistant<sup>x</sup>  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D)<sup>xi</sup>  
Optional: Salt fog certified

### Environmental Specification

Temperature<sup>xii</sup>  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

### Pre-installed Software

Getac Utility  
Getac Camera  
Getac Geolocation  
Getac Barcode Manager<sup>xiii</sup>  
Optional: Absolute Persistence<sup>®</sup>

### Optional software

Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility<sup>xiv</sup>

### Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

### Optional:

Carry bag  
Battery (11.1V, typical 2100mAh; min. 2040mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
Office dock AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen  
Capacitive stylus with tether  
Protection film  
Hard handle  
X strap  
Shoulder strap (2-point)  
Vehicle cradle<sup>xv</sup>  
Vehicle dock<sup>xv</sup>  
Office dock  
DS100 USB-C docking station  
Spare SSD kit  
100W Type-C adapter  
Getac rugged keyboard

# V110 FULLY RUGGED LAPTOP

### Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

### Standard

Garantie Bumper-to-Bumper de 3 ans

- I. Units equipped with dual channel memory come with Intel® Iris® X<sup>e</sup> Graphics.
- II. Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive.
- III. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G LTE option come with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Support GLONASS, Galileo, and BeiDou. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--

# Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140  
Villebon sur Yvette Tel: +33 160 12 80 60  
Sales-Getac-France@getac.com |  
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.