




# B360 Pro FULLY RUGGED LAPTOP

- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- Optional NVIDIA® Quadro® RTX A500 4GB discrete graphic controller
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology

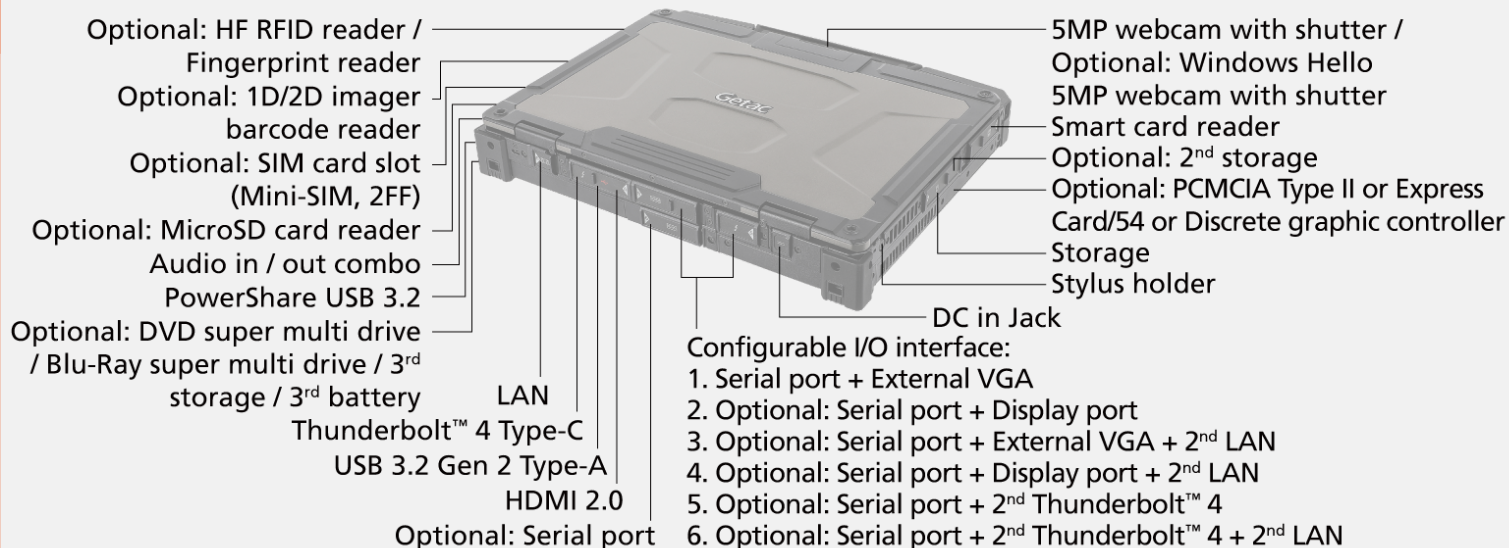

SPECIFICATIONS

**Generation**  
G3  
**Operating System**  
Windows 11 Pro  
**Mobile Computing Platform**  
Intel® Core™ Ultra 5 processor 225H  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache  
**Platform options:**  
Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise  
Max. 5.0GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H  
Max. 5.1GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache  
  
Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise  
Max. 5.3GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

**Graphics**  
Intel® Arc™ Graphics<sup>1</sup>  
Optional: NVIDIA® Quadro®  
RTX A500 4GB discrete graphic controller<sup>ii, iii</sup>

**NPU**  
Intel® AI Boost  
**Display**  
13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film  
1,400 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

**Storage & Memory**  
16GB DDR5  
Optional: 32GB / 64GB DDR5  
  
256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD  
  
Optional 2<sup>nd</sup> storage<sup>iv</sup>:  
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD  
Optional multimedia bay storage : 1TB / 2TB SATA SSD

**Keyboard**  
LED backlit membrane keyboard

**Pointing Device**  
Touchscreen  
- Capacitive multi-touch screen

Touchpad  
- Touchpad with two buttons  
**Expansion Slot**  
Smart card reader x 1  
Optional: Micro SD card reader x 1  
Optional: Discrete graphics controller, or PCMCIA Type II,  
or ExpressCard/54<sup>iii</sup>  
Optional: 1D/2D imager barcode reader

**Multimedia Bay**  
Configurable options<sup>v, vi</sup> :  
1. Optional: DVD super multi drive, or Blu-Ray super multi drive,  
or 3<sup>rd</sup> storage  
2. Optional: 3<sup>rd</sup> battery  
**I/O Interface**  
5MP webcam x 1<sup>vii</sup>  
Audio in/out combo x 1  
DC in Jack x 1  
PowerShare USB 3.2 x 1  
USB 3.2 Gen 2 Type-A x 1  
Thunderbolt™ 4 Type-C x 1<sup>viii</sup>  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Mini-SIM, 2FF)<sup>ix</sup>  
Optional: Windows Hello face-authentication  
5MP camera (front-facing) x 1<sup>x</sup>  
Optional: RF antenna pass-through for GPS, WWAN and WLAN

**Configurable I/O options<sup>x</sup>:**  
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1  
2. Serial port (9-pin; D-sub) x 1 + Display port x 1  
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1  
+ 2<sup>nd</sup> LAN (RJ45) x 1  
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1  
5. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1  
6. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1  
+ 2<sup>nd</sup> LAN (RJ45) x 1  
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1  
8. Serial port (9-pin; D-sub) x 2 + Display port x 1  
9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1  
+ 2<sup>nd</sup> LAN (RJ45) x 1  
10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1  
11. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1  
12. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1  
+ 2<sup>nd</sup> LAN (RJ45) x 1

**Communication Interface**  
10/100/1000 base-T Ethernet  
Intel® Wi-Fi 7 BE200, 802.11be  
Bluetooth (v5.4)<sup>xi</sup>  
Optional: Dedicated GPS with L1/L5<sup>xii</sup>  
Optional: 4G LTE mobile broadband  
with integrated L1/L5 GPS<sup>xiii</sup>  
Optional: 5G Sub-6 with integrated L1/L5 GPS<sup>xii, xiii</sup>  
Optional: Dual SIM (Mini-SIM 2FF and e-SIM)<sup>ix, xiv</sup>

**Security Feature**  
TPM 2.0  
Kensington lock  
Smart card reader  
Optional: Fingerprint reader<sup>xv</sup>  
Optional: HF RFID reader<sup>xv, xvi</sup>  
Optional: Absolute Persistence®  
**Power**  
AC adapter (90W, 100-240VAC, 50/60Hz)  
AC adapter (120W, 100-240VAC, 50/60Hz)<sup>ii</sup>  
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2  
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1  
LifeSupport battery swappable technology

**Dimension (W x D x H) & Weight**  
342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")  
3.08kg (6.79lbs)<sup>xvii</sup>

**Rugged Feature**  
MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified<sup>xviii</sup>  
Vibration & 6ft (1.8m) drop resistant  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D)<sup>xix</sup>  
Optional: Salt fog certified

**Environmental Specification**  
Temperature<sup>xx</sup>  
- Operating: -29°C to 63°C / -20°F to 145°F<sup>xxi</sup>  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

**Pre-installed Software**  
Getac Utility  
Getac Geolocation  
Getac Barcode Manager<sup>xxii</sup>  
Optional: Absolute Secure Endpoint  
Optional: Absolute Secure Access

**Optional Software**  
Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility<sup>xxiii</sup>

**Accessories**  
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (90W, 100-240VAC)  
Capacitive stylus with tether

**Optional:**  
Carry bag  
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (90W, 100-240VAC)  
AC adapter (120W, 100-240VAC)<sup>ii</sup>  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle<sup>xxiv</sup>  
Vehicle dock<sup>xxv</sup>  
Office dock  
Spare SSD kit  
100W Type-C adapter<sup>xxv</sup>

**Bumper-to-Bumper Warranty**  
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.  
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.  
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

**Standard**  
3 years Bumper-to-Bumper

B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. 5MP webcam and optional Windows Hello face-authentication SMP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2<sup>nd</sup> Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPSmodule.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,  
Shropshire TF3 3BJ, United Kingdom  
Tel : +44 (0) 1952 207 222  
Sales-Getac-UK@getac.com |  
www.getac.com/en/  
Copyright © 2025 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only,available specification shall be subjected to  
quotation by request.

Vehicle Dock		Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-