


# **B360 FULLY RUGGED LAPTOP**

- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology
- Versatile I/O options including up to two Thunderbolt<sup>™</sup> 4 and docking solutions



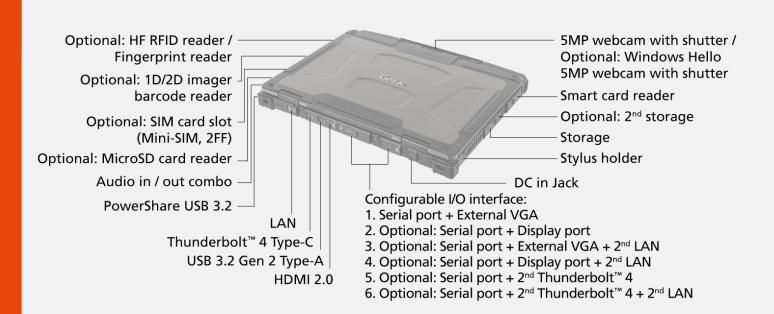

#### **SPECIFICATIONS**

#### Generation

**Operating System** Windows 11 Pro

#### Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H Max. 4.9GHz with Intel® Turbo Boost Technology - 18MB Intel® Smart Cache

Platform options: Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise Max. 5.0GHz with Intel® Turbo Boost Technology - 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H Max. 5.1GHz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise Max. 5.3GHz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache

#### Graphics

Intel<sup>®</sup> Arc<sup>™</sup> Graphics

# Intel® AI Boost

NPU

### Display

Projects

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5 Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2<sup>nd</sup> storage <sup>ii</sup> : 256GB / 512GB / 1TB / 2TB PCIe NVMe SSD

Kevboard

# LED backlit membrane keyboard

Pointing Device

Touchscreen - Capacitive multi-touch screen

Touchpad - Touchpad with two buttons

#### **Expansion Slot**

Smart card reader x 1 Optional: MicroSD card reader x 1 Optional: 1D/2D imager barcode reader

#### I/O Interface

I/O Interface

5MP webcam x 1 III
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt III 4 Type-C x 1
LAN (RJ4S) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) III
Optional: Windows Hello face-authentication
SMP camera (front-facing) x 1 III
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Configurable I/O options V:

1. Serial port (9-pin; D-sub) x 1

+ External VGA (15-pin; D-sub) x 1

2. Serial port (9-pin; D-sub) x 1

3. Serial port (9-pin; D-sub) x 1

+ External VGA (15-pin; D-sub) x 1

+ External VGA (15-pin; D-sub) x 1

+ 2<sup>nd</sup> LAN (R/45) x 1

4. Serial port (9-pin; D-sub) x 1

+ Display port x 1 + 2<sup>nd</sup> LAN (R/45) x 1

5. Serial port (9-pin; D-sub) x 1

+ 2<sup>nd</sup> Thunderbolt<sup>nd</sup> 4 Type-C x 1

6. Serial port (9-pin; D-sub) x 1

+ 2<sup>nd</sup> Thunderbolt<sup>nd</sup> 4 Type-C x 1

+ 2<sup>nd</sup> Thunderbolt<sup>nd</sup> 4 Type-C x 1

+ 2<sup>nd</sup> Thunderbolt<sup>nd</sup> 4 Type-C x 1

#### Communication Interface

10/10/10/00 base-T Ethernet
1ntel® Wi-Fi 7 BE200, 802.11be
Bluetooth (v5.4) w
Optional: Dedicated GPS with L1/L5 wii
Optional: Dedicated GPS with broadband
with integrated L1/L5 GPS wii
Optional: SG Sub-6 with integrated L1/L5 GPS vii, viii
Optional: SG Sub-6 with integrated L1/L5 GPS vii, viii
Optional: Dual SIM (Mini-SIM 2FF and e-SIM) iv. ix

#### **Security Feature**

TPM 2 0 IPM 2.0 Kensington lock Smart card reader Optional: Fingerprint reader \* Optional: HF RFID reader \*.<sup>xd</sup> Optional: Absolute Secure Access

#### Power

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh) x 2 LifeSupport battery swappable technology

#### Dimension (W x D x H) & Weight

342 x 281 x 34.9mm (13.46" x 11.06" x 1.37") 2.32kg (5.11lbs) <sup>xii</sup>

#### Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified <sup>xiii</sup>
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) <sup>xiv</sup>
Optional: Salt fog certified

### **Environmental Specification**

Temperature xv

Temperature <sup>™</sup>:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
- Humidity:
- 95% RH, non-condensing

#### Pre-installed Software

Getac Utility Getac Geolocation Getac Barcode Manager <sup>xxi</sup> Optional: Absolute Secure Endpoint Optional: Absolute Secure Access

#### **Optional Software**

Getac Driving Safety Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility xviii

#### Accessories

Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh) AC adapter (90W, 100-240VAC) Capacitive stylus with tether

#### Optional:

Optional:
Carry bag
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Office dock AC adapter (120W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
C-DC whicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle xiviii
Vehicle dock
Spare SSD kit
100W Type-C adapter

## Bumper-to-Bumper Warranty

Bumper-to-Bumper warranty
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

#### Standard

3 years Bumper-to-Bumper

# **B360 FULLY RUGGED LAPTOP**

- Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
  Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
  5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually explusive options mutually exclusive options.
- Units with 4G/5G option come with an embedded SIM card slot
- card slot.

  External VGA, Display port, and 2<sup>nd</sup> Thunderbolt™ 4
  Type-C are mutually exclusive.

  Bluetooth performance and connectable distance may
  be subject to interference with the environments and
  performance on client devices, users may be able to
  reduce effects of interference by minimizing the
  number of active Bluetooth wireless devices that is
  operating in the area.
- Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in the US, UK, EU, Australia, and New Zealand.
- One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- Fingerprint reader and HF RFID reader are mutually exclusive.
- HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- Weight and dimensions vary from configurations and optional accessories.
- MIL-STD-461 90W AC adapter sold separately
- Available with limited configurations and environment conditions.
- Tested by an independent third-party test lab following MIL-STD-810H.  $\label{eq:mil-std}$
- XVI. Available when barcode reader option is selected. XVII. Models require either embedded or standalone GPS
- XVIII.Gamber Johnson and Havis vehicle docks are e-mark

Information provided herewith is for reference only, available specification shall be subjected to quotation by

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# Getac

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com |

www.getac.com/en/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.