




## G140 FULLY RUGGED TABLET



- Boost productivity with AMD Ryzen™ AI processors and Copilot+ PC, delivering AI-powered performance optimized for edge applications
- 14" LumiBond display with Getac sunlight-readable technology (1,000 nits) in a compact, narrow bezel design for a larger screen in a smaller, lighter form factor
- Capacitive multi-touch display with Smart Touch auto-sensing technology that seamlessly adapts to finger, glove, and stylus input—no manual mode switching required
- Versatile carrying and mounting options—including VESA-type kickstands, rotating hand straps, and magnetic mounts—support diverse industry use cases

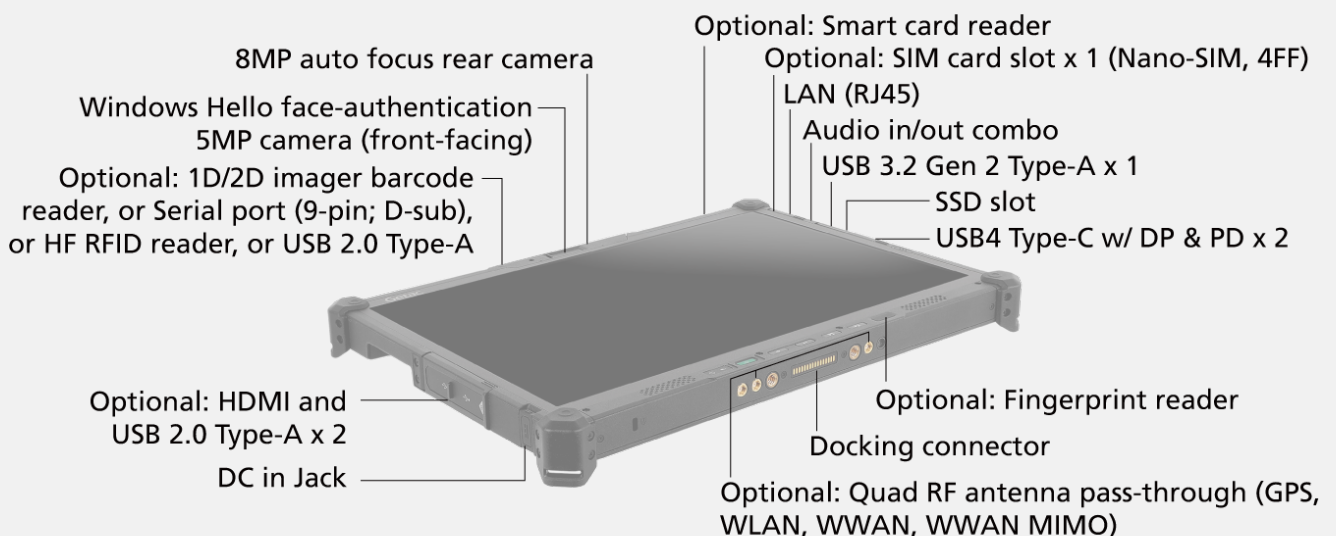

# SPECIFICATIONS

## Generation

G1

## Operating System

Windows 11 Pro

## Mobile Computing Platform

AMD Ryzen™ AI 5 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

### Platform options:

AMD Ryzen™ AI 5 PRO 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

AMD Ryzen™ AI 7 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

AMD Ryzen™ AI 7 PRO 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

## Graphics

AMD Radeon™ 840M  
(For AMD Ryzen™ AI 5 340 Processor)  
AMD Radeon™ 860M  
(For AMD Ryzen™ AI 7 350 Processor)

## NPU

AMD XDNA™ 2 (Up to 50 TOPS)

## Display

14" Wide Viewing Angle IPS LCD WUXGA (1920 x 1200)  
Protection film  
1,000 nits display with Getac sunlight readable technology  
Capacitive multi-touch screen

## Storage & Memory

16GB DDR5  
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

## Keyboard

Power button  
5 tablet programmable buttons

## Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional: Dual mode touchscreen (multi-touch and digitizer)

## Audio

Integrated stereo speakers  
Integrated dual-array microphone

## Expansion Slot

Optional (front side): Fingerprint reader  
Optional (top side): 1D/2D imager barcode reader, or Serial port (9-pin; D-sub), or HF RFID reader, or USB 2.0 Type-A<sup>i</sup>  
Optional (left side): HDMI 2.1 and USB 2.0 Type-A x 2  
Optional (back side): Smart card reader

## I/O Interface

Windows Hello face-authentication 5MP camera (front-facing) x 1  
8MP auto focus rear camera x 1  
USB 3.2 Gen 2 Type-A x 1  
USB4 Type-C (with DisplayPort & Power Delivery) x 2  
LAN (RJ45) x 1  
Audio in/out combo x 1  
DC in Jack x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Nano-SIM, 4FF)<sup>ii</sup>  
Optional: Tri RF antenna pass-through for 4G (GPS, WLAN, WWAN)  
Optional: Quad RF antenna pass-through for 5G (GPS, WLAN, WWAN, WWAN MIMO)

## Communication Interface

Wi-Fi 7  
Bluetooth (v5.4)<sup>iii</sup>  
10/100/1000 base-T Ethernet  
Optional: 4G LTE mobile broadband with integrated GPS<sup>ii</sup>  
Optional: 5G Sub-6 with integrated GPS<sup>ii, iv</sup>  
Optional: Dedicated GPS with L1/L5<sup>v</sup>  
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)<sup>vi</sup>

## Security Feature

TPM 2.0  
Kensington lock  
Windows Hello face-authentication 5MP camera (front-facing)  
Getac Secure Erase  
Optional: AMD PRO Technology  
Optional: Fingerprint reader  
Optional: HF RFID reader<sup>iii</sup>  
Optional: Smart card reader  
Optional: Absolute Persistence®

## Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh) x 2  
LifeSupport battery swappable technology  
Optional: High capacity Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh) x 2

## Dimension (W x D x H) & Weight

338.8 x 238.8 x 23.7mm (13.34" x 9.4" x 0.93")  
1.79kg (3.95 lbs)<sup>viii</sup>

## Rugged Feature

MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified<sup>ix</sup>  
Vibration & 4ft (1.2m) drop resistant<sup>x</sup>  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)<sup>xi</sup>

## Environmental Specifications

Temperature<sup>xii</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Pre-installed Software

Getac Utility  
Getac Camera  
Getac Geolocation  
Getac Barcode Manager<sup>xiii</sup>  
Getac Driving Safety Utility (trial version)  
Getac KeyWedge Barcode Reader Utility (trial version)  
Optional: Absolute Secure Endpoint

## Optional software

Getac Driving Safety Utility  
Getac KeyWedge Barcode Reader Utility  
Getac Monitoring  
Getac VGPS Utility<sup>xiv</sup>  
Absolute Secure Access

## Accessories

Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)

### Optional:

Carry Bag  
Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh)  
High capacity Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen with tether  
Capacitive stylus with tether  
Protection film  
Hard handle  
Rotating hand strap with kickstand and stylus holder (2-point)  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
VESA kickstand  
VESA rotating hand strap  
VESA magnetic mount  
Vehicle cradle  
Vehicle dock<sup>xv</sup>  
Spare SSD kit  
Getac DS100 USB-C docking station with AC adapter  
Getac rugged keyboard

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

# G140 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, Serial port, HF RFID reader, and USB 2.0 Type-A port are mutually exclusive options.
- II. Units with 4G/5G option come with an embedded SIM card slot.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Only available in the US, UK, EU, Australia, and New Zealand.
- V. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Vehicle Dock	
Serial Port	1
USB	5
LAN	1
HDMI	1
RF Antenna Connector	3 (GPS, WLAN, WWAN for 4G) / 4 (GPS, WLAN, WWAN, WWAN MIMO for 5G)

# Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,  
Shropshire TF3 3BJ, United Kingdom  
Tel : +44 (0) 1952 207 222  
Sales-Getac-UK@getac.com |  
www.getac.com/en/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference only, available specification shall be subjected to quotation by request.