





# K120-EX FULLY RUGGED TABLET

- ATEX/IECEx Zone2/22 certified for hazardous locations
- 11<sup>th</sup>Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 vPro<sup>®</sup> Processor
- 12.5" FHD LumiBond display with Getac sunlight readable technology (1,200 nits)
- Enhanced enterprise security with optional Intel vPro®, Windows Hello face-authentication camera and multi-factor authentication options
















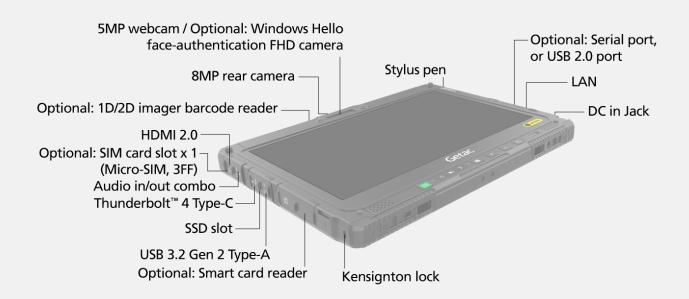

#### **SPECIFICATIONS**

#### Generation

G2-R

#### **Operating System**

Windows 11 Pro

#### Mobile Computing Platform

Intel® Core™ i5-1135G7 Processor Max. 4.2GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Platform options: Intel®Core™ i5-1145G7 vPro® Processor Max. 4.4GHz with Intel®Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor Max. 4.7GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

#### Graphics

Intel® Iris® XeGraphics

#### Display

12.5° Wide Viewing Angle TFT LCD FHD (1920 x 1080) 1,200 nits LumiBond display with Getac sunlight readable technology

#### Storage & Memory

16GB DDR4 Optional: 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

#### Keyboard

Power button 5 tablet programmable buttons

#### Pointing Device

Touchscreen Dual mode touchscreen (multi-touch and digitizer)

#### **Expansion Slot**

Optional: 1D/2D imager barcode reader Optional: Serial port (9-pin; D-sub), or USB 2.0 port

#### I/O Interface

J/U InterTace

5MP webcam x 1 i
8MP auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 x 1
LAN (R)-45) x 1
HDMI 2.0 x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ii
Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1 i
Communication Interface

### **Communication Interface**

Interval of Interv

#### **Security Feature**

Network reactive
TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Strain card reader or HF RFID reader will
Optional: Windows Hello face-authentication
FHD camera (front-facing)
Optional: Absolute Secure Access

#### Power

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

#### Dimension (W x D x H) & Weight

329.5 x 238 x 24mm (12.97" x 9.37" x 0.94") 1.76kg (3.88lbs)<sup>viii</sup>

#### Rugged Feature

MIL-STD-810H certified IP66 certified Vibration & 6ft (1.8m) drop resistant viii ATEX & IECEx certified

#### **Environmental Specification**

Temperature \*:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

#### **Explosion Protection**

ATEX/IECEx Zone 2/22 Ex II 3G Ex ic op is IIC T4 Gc Ex II 3D Ex ic op is IIIB T130°C Dc

#### Pre-installed Software

Pre-Installed Software
Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager \*i
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

#### Optional software

Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility <sup>xii</sup>

#### Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC adapter (90W, 100-240VAC) Digitizer pen

#### Optional:

Optional:
Battery
(11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Digitizer pen with tether
Anti-static protection film
Rotating hand strap with kickstand
Shoulder strap (2-point)
Spare SSD kit

#### **Bumper-to-Bumper warranty**

Bumper-to-Bumper warranty
Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-to-Bumper
warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free
guarantee. That means you can depend on us
to have your unit back in service within days.

#### Standard

3 years Bumper-to-Bumper

## K120-EX FULLY **RUGGED TABLET**

- 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- Units with 4G LTE option comes with an embedded SIM II. card slot.
- card slot.

  Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is
- operating in the area.
  Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass.
- One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers
- Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- Smart card reader and HF RFID reader are mutually exclusive options.
- Weight and dimensions vary from configurations and optional accessories. VIII.
- Drop test results vary from configurations and optional accessories.
- Tested by an independent third-party test lab following MIL-STD-810H. Available when barcode reader option is selected.
- XII. Models require either embedded or standalone

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.





Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.