




B360 PRO FULLY RUGGED LAPTOP

- Certification MIL-STD 810H et IP66, avec résistance aux chutes de 1,8 m (6 pi) ainsi qu'au brouillard salin (en option)
- Processeur Intel® Core™ de 12e génération
- Écran tactile capacitif LumiBond Full HD de 13,3" avec technologie de lecture en plein soleil Getac (1 400 nits)
- Contrôleur graphique NVIDIA® GeForce® GTX1650 4 Go (en option)
- Sécurité d'entreprise améliorée avec le double stockage remplaçable par l'utilisateur, la caméra de reconnaissance faciale Windows Hello, le lecteur imageur de code-barres 1D/2D intégré et de nombreuses autres options d'authentification multifacteur
- Technologie de batterie remplaçable à chaud LifeSupport



B360 Pro 3D demo

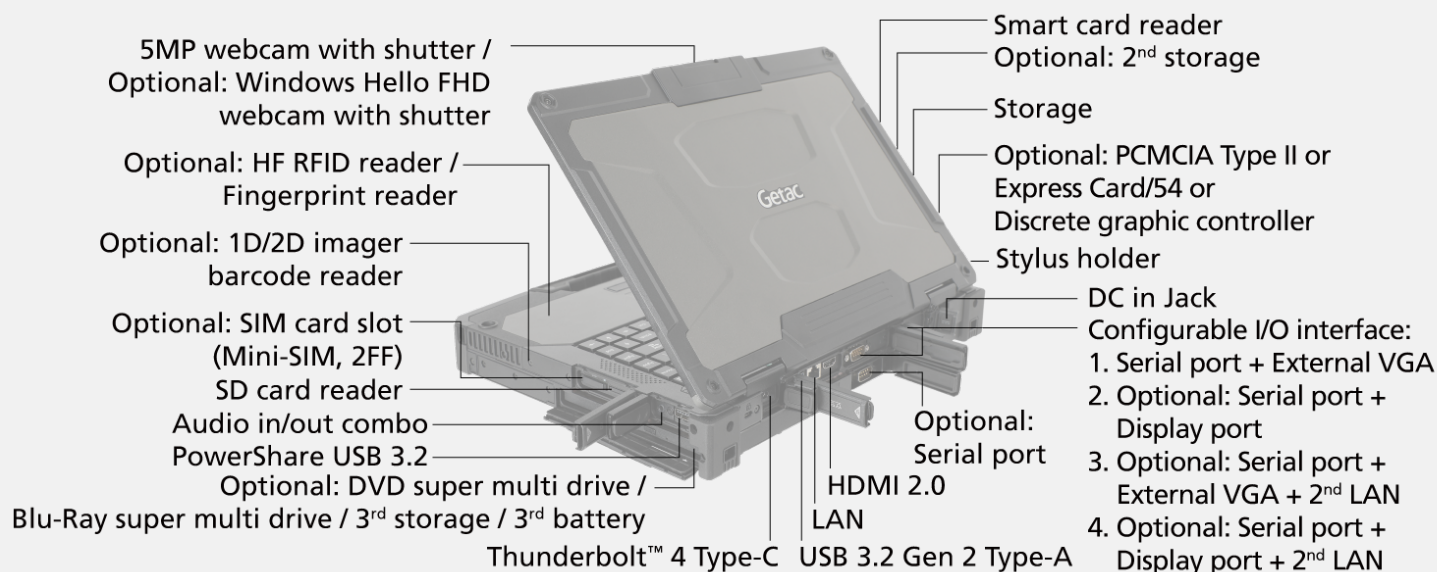

SPECIFICATIONS

Generation

G2

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1240P Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1250P vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1260P Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1270P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

VGA Controller

Intel® Iris® X® Graphicsⁱ
Optional: NVIDIA® GeForce®
GTX1650 4GB discrete graphics controller^{ii,iii}

Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD
Optional 2nd storage^{iv}: 256GB / 512GB /
1TB / 2TB PCIe NVMe SSD
Optional multimedia bay storage : 1TB / 2TB SATA SSD

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen
- Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Expansion Slot

Smart card reader x 1
Optional: SD card reader x 1
Optional: Discrete graphics controller, or PCMCIA Type II,
or ExpressCard/54ⁱⁱⁱ
Optional: 1D / 2D imager barcode reader

Multimedia Bay

Configurable options^{v,vi} :
1. Optional: DVD super multi drive, or Blu-Ray super multi drive,
or 3rd storage
2. Optional: 3rd battery

I/O Interface

5MP webcam x 1^{xxii}
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1^{vii}
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF)^{viii}
Optional: Windows Hello face-authentication FHD camera
(front-facing) x 1^{xxi}
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Configurable I/O options^{ix} :

1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
6. Serial port (9-pin; D-sub) x 2 + Display port x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2nd LAN (RJ45) x 1

Communication Interface

10 / 100 / 1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3)^x
Optional: Dedicated GPS with L1/L5^{xxiii}
Optional: 4G LTE mobile broadband with integrated GPS^{viii, xxiv}
Optional: 5G Sub-6 with integrated L1/L5 GPS^{xxv, xxvi}

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Optional: Fingerprint reader^{xi}
Optional: HF RFID reader^{xi, xii}
Optional: Windows Hello face-authentication FHD camera
(front-facing)^{xxii}
Getac Disk Wipe

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz)ⁱⁱ
High capacity Li-ion battery (10.8V, typical 6900mAh;
min. 6600mAh) x 2
Optional: Multimedia bay battery (11.1V, typical 4200mAh;
min. 4080mAh) x 1
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08Kg (6.79lbs)^{xxiii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xiv}
Vibration 8amp; 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{xv}
Optional: Salt fog certified

Environmental Specification

Temperature^{xvi} :
- Operating: -29°C to 63°C / -20°F to 145°F^{xxvii}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager^{xxviii}
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xxix}

Accessories

High capacity Li-ion battery (10.8V, typical 6900mAh;
min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
High Capacity Li-ion Battery (10.8V, typical 6900mAh;
min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter (120W, 100-240VAC)ⁱⁱ
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle^{xx}
Vehicle dock^{xx}
Office dock
Spare SSD kit
100W Type-C adapter^{xxi}

B360 PRO FULLY RUGGED LAPTOP

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

- I. Units equipped with dual channel memory come with Intel® Iris® X® Graphics.
II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
III. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
V. Option 1 and 2 are mutually exclusive.
VI. Factory option. Not user swappable.
VII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
VIII. Units with 4G LTE option come with an embedded SIM card slot.
IX. External VGA and Display port are mutually exclusive.
X. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
XI. Fingerprint reader and HF RFID reader are mutually exclusive.
XII. HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
XIII. Weight and dimensions vary from configurations and optional accessories.
XIV. MIL-STD-461 90W AC adapter sold separately.
XV. Available with limited configurations and environment conditions.
XVI. Tested by an independent third-party test lab following MIL-STD-810H.
XVII. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
XVIII. Available when barcode reader option is selected.
XIX. Models require either embedded or standalone GPS module.
XX. Gamber Johnson and Havis vehicle docks are e-mark certified.
XXI. Do not support the configurations with discrete graphics card.
XXII. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
XXIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
XXIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.