


F110 WMS FULLY RUGGED TABLET



- Processeur de 11th Génération Intel® Core™ i3
- Interface Thunderbolt™ 4 à très haut débit et hautes performances
- Écran tactile capacitif LumiBond Full HD de 11,6" avec technologie de lecture en plein soleil Getac (1 000 nits)

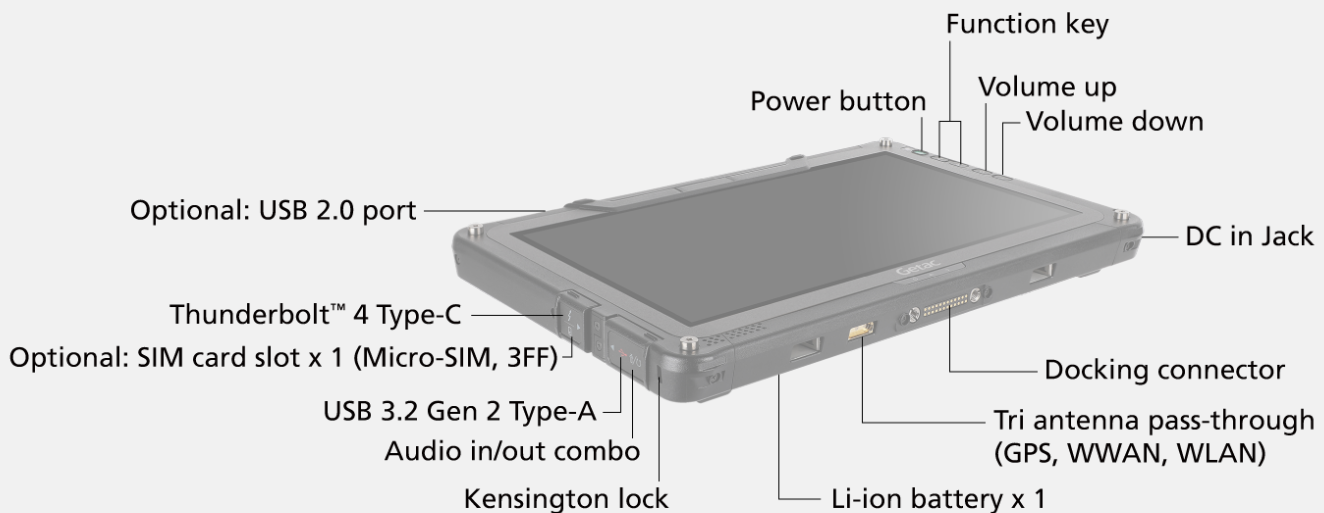

SPECIFICATIONS

Generation

G6

Operating System

Windows 10 IoT

Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor
Max. 4.1GHz with Intel® Turbo Boost
Technology - 6MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
256GB PCIe NVMe SSD

Keyboard

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Expansion Slot

Optional: USB 2.0 port

I/O Interface

Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ⁱ
RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2) ⁱⁱ
Optional: 4G LTE mobile broadband
with integrated GPS ⁱ

Security Feature

TPM 2.0
Kensington lock

Power

Li-ion battery (11.4V, typical 2680mAh;
min. 2640mAh) x 1 ^{iii, iv}

Dimension (W x D x H) & Weight

314 x 207 x 25mm (12.4" x 8.15" x 0.98")
1.35kg (2.97lbs) ^v

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{vi}
Vibration & 6ft (1.8m) drop resistant

Environmental Specification

Temperature ^{vii} :
- Operating:
-29°C to 63 °C / -20°F to 145°F
(when docked and/or powered by
an external power supply)
-10°C to 63 °C / 14°F to 145°F
(when undocked and only powered
by one battery)

- Storage: -51°C to 71 °C / -60°F to 160°F
Humidity: - 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Driving Safety Utility (trial version)
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{viii}

Accessories

Battery (11.4V, typical 2680mAh;
min. 2640mAh)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.4V, typical 2680mAh;
min. 2640mAh)
High capacity Li-ion battery (11.1V,
typical 4200mAh; min.4080mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC, 50 / 60Hz)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle ^{ix}
Vehicle dock ^{ix}
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

F110 WMS FULLY RUGGED TABLET

- I. Units with 4G LTE option come with an embedded SIM card slot.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. At the point of purchase, the second battery will be fitted with a dummy battery.
- IV. The second battery is sold separately; units with two batteries installed support the LifeSupport battery swappable technology.
- V. Weight and dimensions vary from configurations and optional accessories.
- VI. MIL-STD-461 90W AC adapter sold separately.
- VII. Tested by an independent third-party test lab following MIL-STD-810H.
- VIII. Models require the embedded GPS module.
- IX. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI 1.4	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.