




G140 FULLY RUGGED TABLET



- Boostez votre productivité avec les processeurs AMD Ryzen™ AI et Copilot+ PC, qui offrent des performances optimisées par l'IA pour les applications en périphérie de réseau (Edge)
- Écran LumiBond de 14 pouces avec technologie Getac lisible en plein soleil (1 000 nits) dans un design compact et fin pour un écran plus grand dans un format plus petit et plus léger
- Écran multi-touch capacitif doté de la technologie de détection automatique Smart Touch qui s'adapte sans transition à la saisie au doigt, avec des gants ou un stylet, sans qu'il soit nécessaire de passer en mode manuel
- Des options de transport et de montage polyvalentes – incluant des supports de type VESA, des dragonnes rotatives et des fixations magnétiques – prennent en charge divers cas d'usage industriels

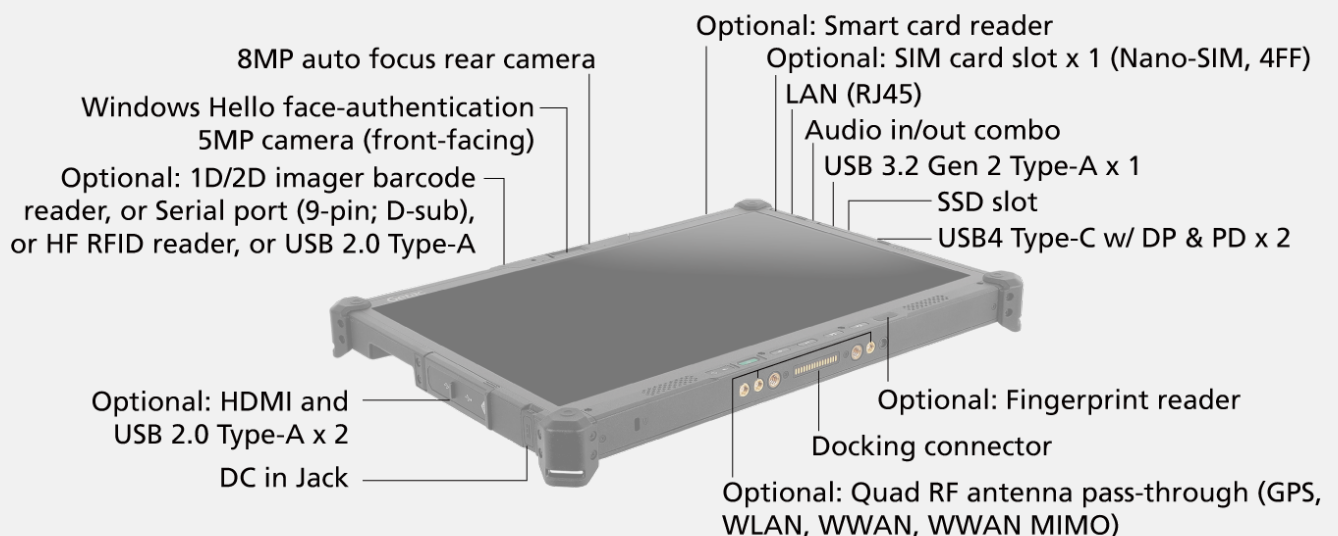

SPECIFICATIONS

Generation

G1

Operating System

Windows 11 Pro

Mobile Computing Platform

AMD Ryzen™ AI 5 340 Processor
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

Platform options:

AMD Ryzen™ AI 5 PRO 340 Processor
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

AMD Ryzen™ AI 7 350 Processor
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

AMD Ryzen™ AI 7 PRO 350 Processor
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

Graphics

AMD Radeon™ 840M
(For AMD Ryzen™ AI 5 340 Processor)
AMD Radeon™ 860M
(For AMD Ryzen™ AI 7 350 Processor)

NPU

AMD XDNA™ 2 (Up to 50 TOPS)

Display

14" Wide Viewing Angle IPS LCD WUXGA (1920 x 1200)
Protection film
1,000 nits display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Optional (front side): Fingerprint reader
Optional (top side): 1D/2D imager barcode reader, or Serial port (9-pin; D-sub), or HF RFID reader, or USB 2.0 Type-Aⁱ
Optional (left side): HDMI 2.1 and USB 2.0 Type-A x 2
Optional (back side): Smart card reader

I/O Interface

Windows Hello face-authentication 5MP camera (front-facing) x 1
8MP auto focus rear camera x 1
USB 3.2 Gen 2 Type-A x 1
USB4 Type-C (with DisplayPort & Power Delivery) x 2
LAN (RJ45) x 1
Audio in/out combo x 1
DC in Jack x 1
Docking connector x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF)ⁱⁱ
Optional: Tri RF antenna pass-through for 4G (GPS, WLAN, WWAN)
Optional: Quad RF antenna pass-through for 5G (GPS, WLAN, WWAN, WWAN MIMO)

Communication Interface

Wi-Fi 7
Bluetooth (v5.4)ⁱⁱⁱ
10/100/1000 base-T Ethernet
Optional: 4G LTE mobile broadband with integrated GPSⁱⁱ
Optional: 5G Sub-6 with integrated GPS^{ii,iv}
Optional: Dedicated GPS with L1/L5^v
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)^{vi}

Security Feature

TPM 2.0
Kensington lock
Windows Hello face-authentication 5MP camera (front-facing)
Getac Secure Erase
Optional: AMD PRO Technology
Optional: Fingerprint reader
Optional: HF RFID readerⁱⁱⁱ
Optional: Smart card reader
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh) x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh) x 2

Dimension (W x D x H) & Weight

338.8 x 238.8 x 23.7mm (13.34" x 9.4" x 0.93")
1.79kg (3.95 lbs)^{viii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{ix}
Vibration & 4ft (1.2m) drop resistant^x
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{xi}

Environmental Specifications

Temperature^{xii}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xiii}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Monitoring
Getac VGPS Utility^{xiv}
Absolute Secure Access

Accessories

Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)

Optional:

Carry Bag
Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh)
High capacity Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand and stylus holder (2-point)
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
VESA kickstand
VESA rotating hand strap
VESA magnetic mount
Vehicle cradle
Vehicle dock^{xv}
Spare SSD kit
Getac DS100 USB-C docking station with AC adapter
Getac rugged keyboard

Bumper-to-Bumper warranty

Les accidents peuvent mettre votre équipement hors service au moment où vous vous y attendez le moins, en particulier dans un environnement difficile, ce qui peut entraîner des temps d'arrêt coûteux. C'est pourquoi Getac a introduit les dommages accidentels en standard dans notre nouvelle garantie Bumper-to-Bumper, pour aider à minimiser les coûts informatiques de votre entreprise. Bumper-to-Bumper est votre garantie sans souci. Cela signifie que vous pouvez compter sur nous pour remettre votre appareil en service en quelques jours.

Standard

3 ans de garantie Bumper-to-Bumper

G140 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, Serial port, HF RFID reader, and USB 2.0 Type-A port are mutually exclusive options.
- II. Units with 4G/5G option come with an embedded SIM card slot.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Only available in the US, UK, EU, Australia, and New Zealand.
- V. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Vehicle Dock	
Serial Port	1
USB	5
LAN	1
HDMI	1
RF Antenna Connector	3 (GPS, WLAN, WWAN for 4G) / 4 (GPS, WLAN, WWAN, WWAN MIMO for 5G)

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.