


T800 FULLY RUGGED TABLET



- 8.1" HD LumiBond display for better viewing experience
- Getac proprietary SnapBack add-on featuring smart card and contactless RFID reader combo or 2nd expanded battery
- Choice of 1D/2D imager barcode reader, Serial port and LAN port (RJ45)
- MIL-STD-810H and IP65 certified
- Enhanced enterprise security with TPM2.0, Windows disk encryption



T800 3D demo

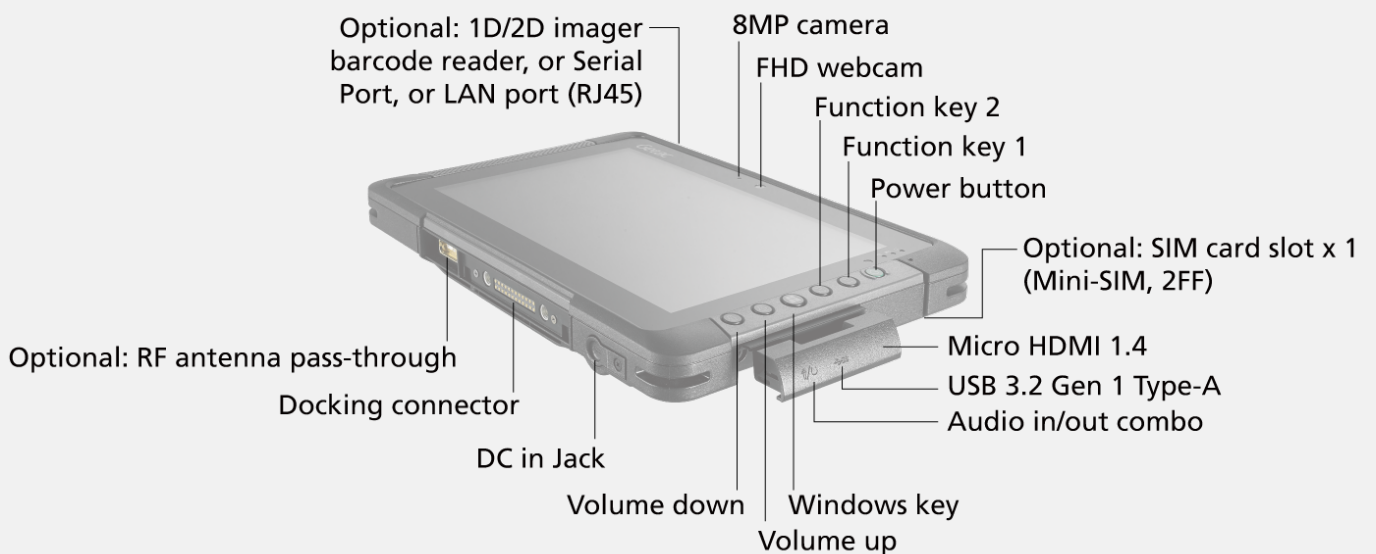

SPECIFICATIONS

Generation

G2

Operating System

Windows 10 IoT Enterprise

Mobile Computing Platform

Intel® Atom Processor x7-Z8750 1.6GHz,
burst up to 2.56GHz
- 2MB Cache

VGA Controller

Intel® HD Graphics

Display

8.1" Wide Viewing Angle TFT LCD WXGA (1280 x 800)
Protection film
600 nits LumiBond display with Getac
sunlight readable technology

Storage & Memory

4GB LPDDR3
Optional: 8GB LPDDR3

128GB eMMC
Optional: 256GB eMMC

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader, Serial port,
Ethernetⁱ
Optional: SnapBack add-on: Smart card and HF RFID/NFC
reader comboⁱⁱ
Optional: SnapBack add-on: 2nd
expanded batteryⁱⁱ
Optional: SnapBack add-on: Smart card
and magnetic stripe readerⁱⁱ

I/O Interface

FHD webcam x 1
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-A x 1
Micro HDMI 1.4 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF)ⁱⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2)^{iv}
Optional: Dedicated GPS
Optional: 4G LTE mobile broadbandⁱⁱⁱ
Optional: 10/100/1000 base-T Ethernet
(Occupies expansion slot)

Security Feature

TPM 2.0
Optional: SnapBack add-on: Smart card
and HF RFID/NFC combo reader^{ii,v}
Optional: SnapBack add-on: Smart card
and magnetic stripe readerⁱⁱ

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (7.4V, typical 4200mAh;
min. 4080mAh)
LifeSupport battery swappable technology
(only with SnapBack 2nd expanded battery)

Dimension (W x D x H) & Weigh

227 x 151 x 24 mm (8.93" x 5.94" x 0.94")^{vi}
0.88kg (1.94 lbs)^{vi}

Rugged Feature

MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified
Vibration & 6ft (1.8m) drop resistant^{vii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{viii}

Environmental Specification

Temperature^{ix}:
- Operating: -21°C to 50°C / -6°F to 122°F
- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Barcode Manager^x
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence^z

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{yy}

Accessories

Battery (7.4V, typical 4200mAh;
min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Battery (7.4V, typical 4200mAh;
min. 4080mAh)
2nd expanded battery
(14.4V, 2100mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay expanded battery dock
with adapter (Six-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Wrist strap
Vehicle cradle^{zz}
Vehicle dock^{zz}
Office dock

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

T800 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, Serial port, and Ethernet, are mutually exclusive options.
- II. All SnapBack add-ons are mutually exclusive options.
- III. Units with 4G LTE option come with an embedded SIM card slot.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.
- XII. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle dock	Office Dock
Serial Port	1	-
External VGA	-	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	2	4
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.