


UX10-EX FULLY RUGGED TABLET



- Certification ATEX et CEIEx pour un usage en zones explosives
- Processeur Intel® Core™ i5/i7 de 10e génération
- LumiBond 2.0 Full HD de 10,1" avec technologie de lecture en plein soleil Getac (1 000 nits)
- Poignée rigide multifonction pour une grande flexibilité sur le terrain
- Plusieurs options configurables pour répondre à différents scénarios d'utilisation



UX10-EX 3D demo

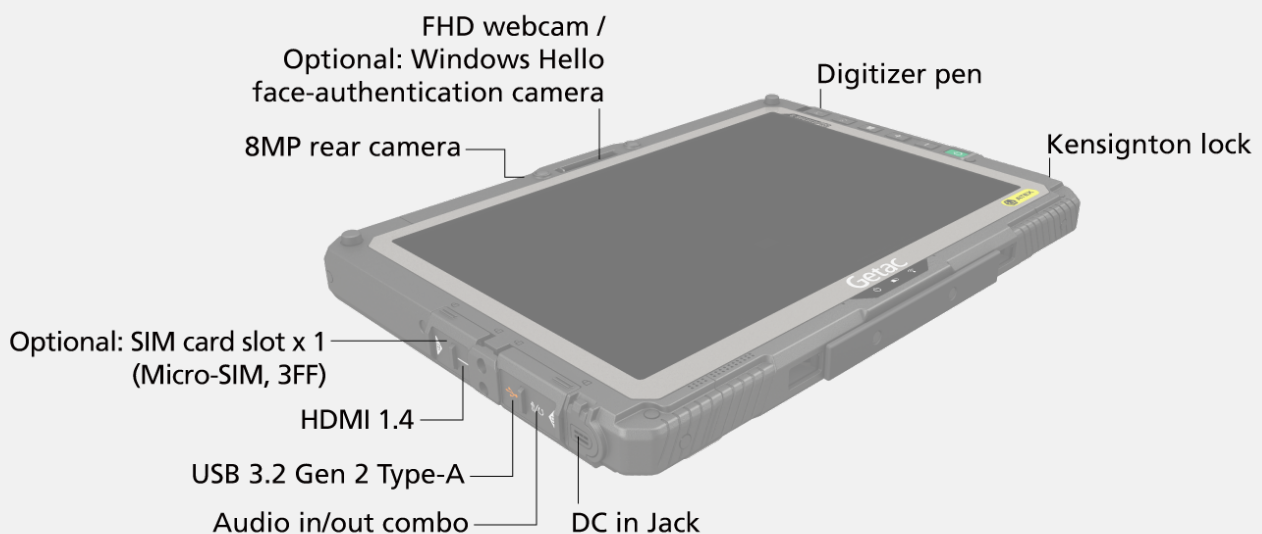

SPECIFICATIONS

Generation

G2-R

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-10210U Processor 1.6GHz
Max. 4.2GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-10310U, vPro® Processor 1.7GHz
Max. 4.4GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-10610U vPro® Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
1,000 nits LumiBond display with Getac sunlight
readable technology

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional (top side): 1D/2D imager barcode reader,
or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port,
or LAN port (RJ45), or VGA port ⁱ,
or HF RFID reader ⁱⁱ

I/O Interface

FHD webcam x 1 ⁱⁱⁱ
8MP auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
HDMI 1.4 x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^{iv}
Optional: Windows Hello face-authentication camera
(front-facing) x 1 ⁱⁱⁱ

Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2) ^v
Optional: Dedicated GPS ^{vi}
Optional: 4G LTE mobile broadband with integrated GPS ^{iv, vi}
Optional: 10/100/1000 base-T Ethernet

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID reader ⁱ
Optional: Windows Hello face-authentication
camera (front-facing) ⁱⁱⁱ

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1

Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5 mm (10.89" x 7.65" x 0.92")
1.24kg (2.73lbs) ^{vii}

Rugged Feature

MIL-STD-810H certified
IP65 certified
Vibration & 6ft (1.8m) drop resistant ^{viii}
ATEX & IECEx certified

Environmental Specification

Temperature ^{ix} :
- Operating: -21°C to 63°C / -6°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^x
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ⁱⁱ

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Digitizer pen

Optional:

Battery (11.1V, typical 4200mAh; min. 4080mAh)
High capacity Li-ion battery (10.8V, 9240 mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Digitizer pen with tether
Anti-static protection film
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
100W Type-C adapter

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

UX10-EX FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- II. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- IV. Units with 4G LTE option come with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. Supports GPS and Glonass.
- VII. Weight and dimensions vary from configurations and optional accessories.
- VIII. Drop test results vary from configurations and optional accessories.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.