




UX10 FULLY RUGGED TABLET

- Processeur Intel® Core™ i5/i7 de 12e génération
- Écran tactile capacitif LumiBond 2.0 Full HD de 10,1" avec technologie de lecture en plein soleil Getac (1 000 nits)
- Sécurité d'entreprise améliorée avec la technologie Intel® vPro™, la caméra de reconnaissance faciale Windows Hello et de nombreuses autres options d'authentification multifacteur
- Connectivité E/S polyvalente, y compris Thunderbolt™ 4
- Amélioration des performances Wi-Fi, GPS et LTE



UX10 3D demo

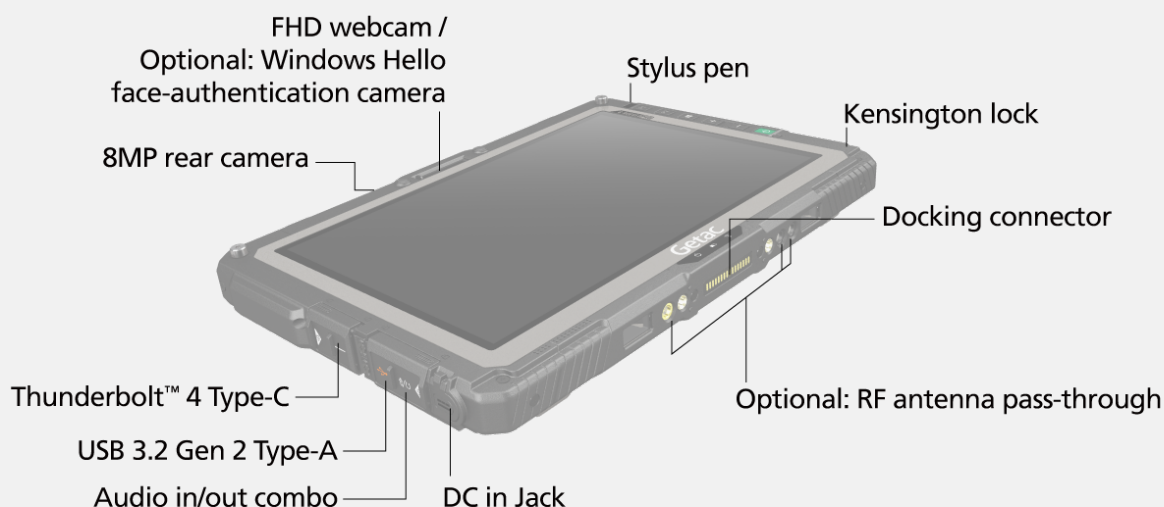

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Pentium™ 8505 Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Graphics

Intel® UHD Graphics

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac
sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot

Optional (top side): 1D/2D imager barcode reader,
or Serial port, or USB 3.2 Gen 1 Type-A port,
or LAN port (RJ45), or microSD
or HF RFID readerⁱ,
or HDMI 2.0ⁱⁱ
Optional (right side): LAN port (RJ45)
or Fingerprint readerⁱⁱⁱ
Optional (back side): Smart card reader,
or Bridge battery, or Bridge battery +
Smart card reader^{iv}

I/O Interface

FHD webcam x 1^v
8MP auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Docking connector x 1
Thunderbolt™ 4 Type-C x 1
Optional: Windows Hello face-authentication camera
(front-facing) x 1^v
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Optional: 10/100/1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3)^{vi}
Optional: Dedicated GPS with L1/L5^{ix}
Optional: 4G LTE mobile broadband with
integrated GPS^{vii, viii, ix, x}
Optional: 5G Sub-6 with integrated GPS^{vii, viii, ix}
Optional: Dual SIM (Micro-SIM 3FF and e-SIM)^{vii, viii}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID reader^{xi}
Optional: Fingerprint readerⁱⁱⁱ
Optional: Smart card reader^{iv}
Optional: Windows Hello face-authentication
camera (front-facing)^v
Optional: Absolute Secure Access

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1
Optional: Bridge battery^{xv}

Dimension (W x D x H) & Weight

279 x 194.5 x 23.5mm (10.98" x 7.65" x 0.92")^{xi}
1.22kg (2.68lbs)^{xi}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xii}
Vibration & 6ft (1.8m) drop resistant^{xiii}
Optional: ANSI/JUL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{xiv}

Environmental Specification

Temperature^{xv} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xvi}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xvii}

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Folio case
Battery (11.1V, typical 4200mAh; min. 4080mAh)
High capacity Li-ion battery (10.8V, 9240 mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard^{xviii}
Vehicle cradle^{xviii}
Keyboard dock^{xviii}
Vehicle dock^{xviii}
Office dock
100W Type-C adapter

UX10 FULLY
RUGGED TABLET

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

- I. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, LAN port (RJ45), HF RFID reader, MicroSD and HDMI 2.0 are mutually exclusive options.
- III. Fingerprint reader and LAN Port are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. One physical SIM card slot and one eSIM.
- VIII. Network service may vary depending on local telecommunication providers.
- IX. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.
- X. Units with 4G LTE option come with an embedded SIM card slot.
- XI. Weight and dimensions vary from configurations and optional accessories.
- XII. MIL-STD-461 90W AC adapter sold separately.
- XIII. Drop test results vary from configurations and optional accessories.
- XIV. Available with limited configurations and environment conditions.
- XV. Tested by an independent third-party test lab following MIL-STD-810H.
- XVI. Available when barcode reader option is selected.
- XVII. Models require either embedded or standalone GPS module.
- XVIII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	-	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	1	1



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.