


V110 FULLY RUGGED LAPTOP



- Processeur Intel® Core™ i5/i7 vPro™ de 12e génération
- Écran tactile capacitif LumiBond 2.0 de 11,6" avec technologie de lecture en plein soleil Getac
- Sécurité d'entreprise améliorée avec la technologie Intel® vPro™, la caméra de reconnaissance faciale Windows Hello, le standard TPM 2.0 et de nombreuses autres options d'authentification multifacteur
- Écran tactile double mode en option (multipoint et tablette graphique)
- Double batterie avec technologie de remplacement à chaud LifeSupport



V110 3D Demo

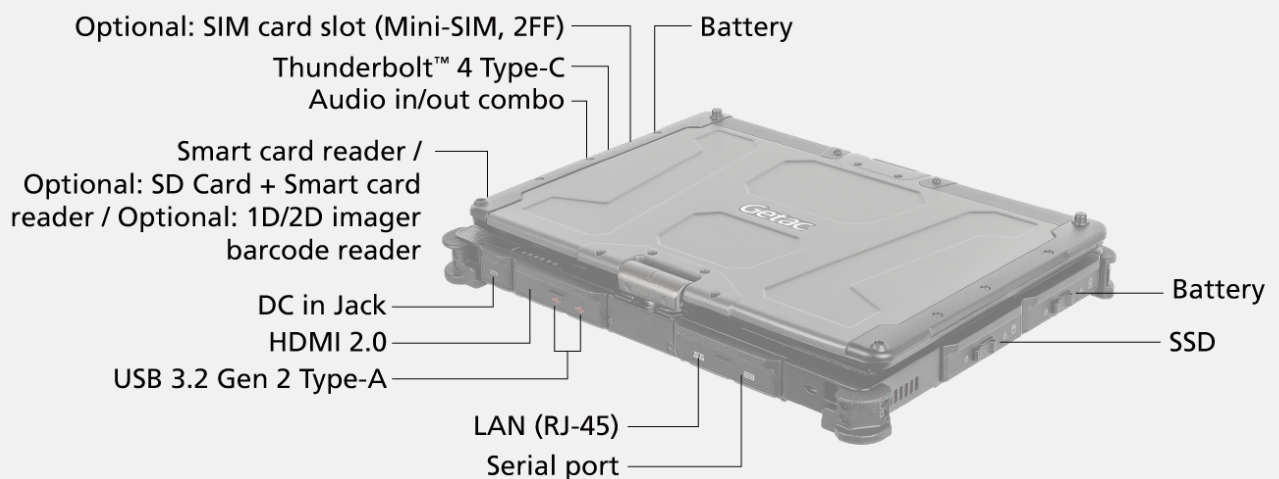

SPECIFICATIONS

Generation
G7

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1245U vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Graphics
Intel® Iris® Xe Graphics ⁱ

Display
11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard
LED backlit membrane keyboard
Optional: Rubber keyboard
Power button
5 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)
Touchpad
- Glide touchpad with left-click and right-click buttons

Expansion Slot
Smart card reader ⁱⁱ
Optional: SD Card + Smart card reader ⁱⁱ
Optional: 1D/2D imager barcode reader ⁱⁱ

I/O Interface
5MP webcam x 1 ⁱⁱⁱ
Audio in/out combo x 1
DC in Jack x 1
Thunderbolt™ 4 Type-C x 1
USB 3.2 Gen 2 Type-A x 2
LAN (RJ45) x 1
HDMI 2.0 x 1
Serial port (9-pin; D-sub) x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{iv}
Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1 ⁱⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN
Optional: 8MP auto focus rear camera x 1

Communication Interface
10/100/1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3) ^v
Optional: Dedicated GPS ^{vii}
Optional: 4G LTE mobile broadband ^{vi, iv, xvi}
Optional: 5G Sub-6 ^{iv, vi, xvi}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM) ^{vi}

Security Feature
TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Fingerprint reader
Optional: HF RFID reader ⁱⁱⁱ
Smart card reader
Optional: Windows Hello face-authentication
FHD camera (front-facing) ⁱⁱ
Optional: Absolute Secure Access

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight
313 x 238 x 39mm (12.32" x 9.37" x 1.53")
2.1kg (4.63lbs) ^{viii}

Rugged Feature
MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified ^{ix}
Vibration 8amp; 4ft (1.2m) drop resistant ^x
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{xi}
Optional: Salt fog certified

Environmental Specification
Temperature ^{xii}
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xiii}
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software
Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{xiv}

Accessories
Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:
Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
X strap
Shoulder strap (2-point)
Vehicle cradle ^{xv}
Vehicle dock ^{xv}
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

V110 FULLY RUGGED LAPTOP

Bumper-to-Bumper warranty
Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard
Garantie Bumper-to-Bumper de 3 ans

- I. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics.
- II. Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive.
- III. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G LTE option come with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Support GLONASS, Galileo, and BeiDou. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.