


X600 PRO FULLY RUGGED LAPTOP



- Processeur de 11ème génération Intel® Core™ i7 / i5 vPro®
- Écran LumiBond® FHD de 15,6 pouces avec technologie Getac de lecture en plein soleil (1 000 nits) et écran tactile capacitif en option
- Fonctions de sécurité d'entreprise améliorées avec TPM 2.0, verrou Kensington, triple disques durs remplaçables par l'utilisateur et lecteur de cartes à puce
- Connectivité d'E/S polyvalente, notamment Thunderbolt™ 4 et connecteur station d'accueil
- Carte graphique NVIDIA® Quadro® RTX3000 en option
- Emplacements modulaires pour l'ajout de ports de communication, batteries, lecteur DVD super multi



X600 Pro 3D demo

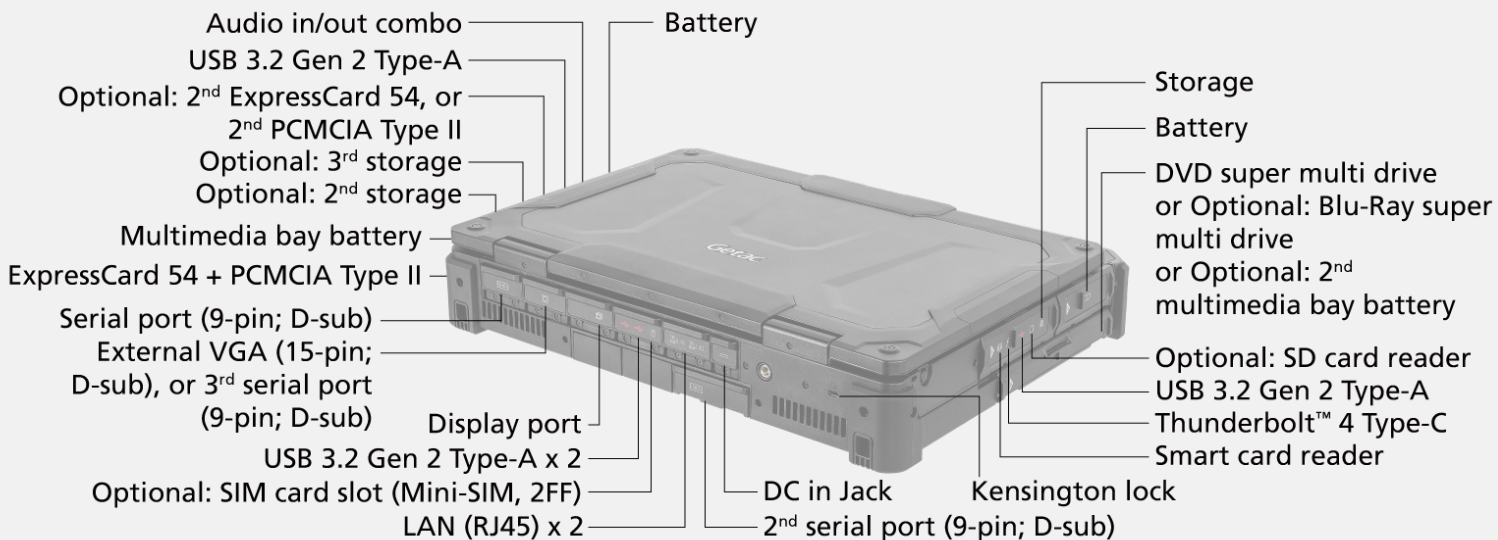

SPECIFICATIONS

Generation

G1

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-11500HE vPro® Processor
Max. 4.5GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i7-11850HE vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Xeon® W-11865MRE vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 24 MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics
Optional: NVIDIA® Quadro®
RTX3000 6GB discrete graphics controller^{i,ii,iii}
Optional: NVIDIA® GeForce®
GTX1650 4GB discrete graphics controller^{i,ii}

Display

15.6" TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display
with Getac sunlight readable technology
Optional: Capacitive multi-touch screen

Storage & Memory

16GB DDR4
Optional: 32GB / 64GB / 128GB DDR4

512GB PCIe SSD
Optional: 1TB / 2TB PCIe SSD
Optional 2nd storage: 512GB / 1TB / 2TB PCIe SSD
Optional 3rd storage: 512GB / 1TB / 2TB PCIe SSD

Keyboard

LED backlit membrane keyboard
with integrated numeric keypad

Pointing Device

Touchscreen
- Optional: Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Expansion Slot

Smart card reader
ExpressCard 54 + PCMCIA Type II
Optional: 2nd ExpressCard 54 or 2nd
PCMCIA Type II^{iv}
Optional: SD card reader

Multimedia Bay

Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh)
DVD super multi drive^v
Optional: Multimedia bay 2nd battery
(11.1V, typical 4200mAh; min. 3980mAh)
or Blu-Ray super multi drive^v

I/O Interface

5M webcam x 1
Thunderbolt™ 4 Type-C x 1
USB 3.2 Gen 2 Type-A x 4
LAN (RJ-45) x 2
Audio in/out combo x 1
DC in Jack x 1
HDMI 2.0 x 1
Display port x 1
Docking connector x 1
Serial port (9-pin; D-sub) x 2
External VGA (15-pin; D-sub) x1 or 3rd serial
port (9-pin; D-sub) x 1^{vi}
Optional: SIM card slot x 1 (Mini-SIM, 2FF)^{vii}
Optional: RF antenna pass-through for GPS,
WWAN and WLAN x 1

Communication Interface

2.5GBASE-T Ethernet
Intel® Wi-Fi 6E AX210, 802.11ax
Bluetooth (v5.2)^{viii}
Optional: Dedicated GPS^{ix}
Optional: 4G LTE mobile broadband
with integrated GPS^{xix,ix}

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Intel® vPro® Technology

Power

AC adapter (230W, 100-240VAC, 50/60Hz)ⁱ
Battery (10.8V, typical 6900mAh;
min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh) x 1
Optional: Multimedia bay 2nd battery
(11.1V, typical 4200mAh; min. 3980mAh)^v

Dimension (W x D x H) & Weight

412 x 322 x 77.4mm (16.22" x 12.68" x 3.05")^x
6.05kg (13.34lbs)^x

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xi}
Vibration and 4ft (1.2m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification

Temperature^{xii}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Optional: Absolute Persistence®

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh) x 1
AC adapter (230W, 100-240VAC, 50/60Hz)ⁱ
Capacitive stylus with tether

Optional:

Backpack
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia bay battery (11.1V, typical 4200mAh;
min. 3980mAh)
Multi-Bay charger (Dual-Bay)
Multimedia bay DVD super multi drive^v
Multimedia bay Blu-Ray super multi drive^v
AC adapter (230W, 100-240VAC, 50/60Hz)ⁱ
Office dock AC adapter (230W, 100-240VAC,
50/60Hz)ⁱ
MIL-STD-461 AC adapter (230W, 100-240VAC)^{xi}
DC-DC vehicle adapter (230W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle dock
Office dock
DS100 USB-C docking station
Spare SSD kit

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

X600 PRO FULLY RUGGED LAPTOP

- I. The configuration with a discrete graphic controller requires the 230W AC adapter.
- II. 150W AC adaptor is not applicable with discrete graphic controller nor office dock.
- III. For X600 Pro optional NVIDIA® Quadro® RTX3000, the operating temperature is 0°C to 63°C / 32°F to 145°F.
- IV. The 2nd ExpressCard 54 and the 2nd PCMCIA Type II card readers are mutually exclusive.
- V. DVD super multi drive, Blu-Ray super multi drive, and the 2nd multimedia bay battery are mutually exclusive.
- VI. The 3rd Serial port is optional and mutually exclusive with External VGA.
- VII. Units with 4G LTE option comes with an embedded SIM card slot.
- VIII. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IX. Dedicated GPS and 4G LTE are mutually exclusive options.
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 230W AC adapter sold separately.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

| | Office Dock | Vehicle Dock |
|----------------------|-------------|---------------------|
| Serial Port | 1 | 1 |
| External VGA | 1 | 1 |
| Microphone | 1 | - |
| Audio Output | 1 | - |
| DC in Jack | 1 | 1 |
| USB | 5 | 6 |
| LAN | 2 | 2 |
| HDMI | 1 | 1 |
| Display port | 1 | 1 |
| RF Antenna Connector | - | 1 (GPS, WWAN, WLAN) |
| Kensintonlock | 1 | 1 |

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.