


## ZX10-EX FULLY RUGGED TABLET



- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended <sup>viii</sup>

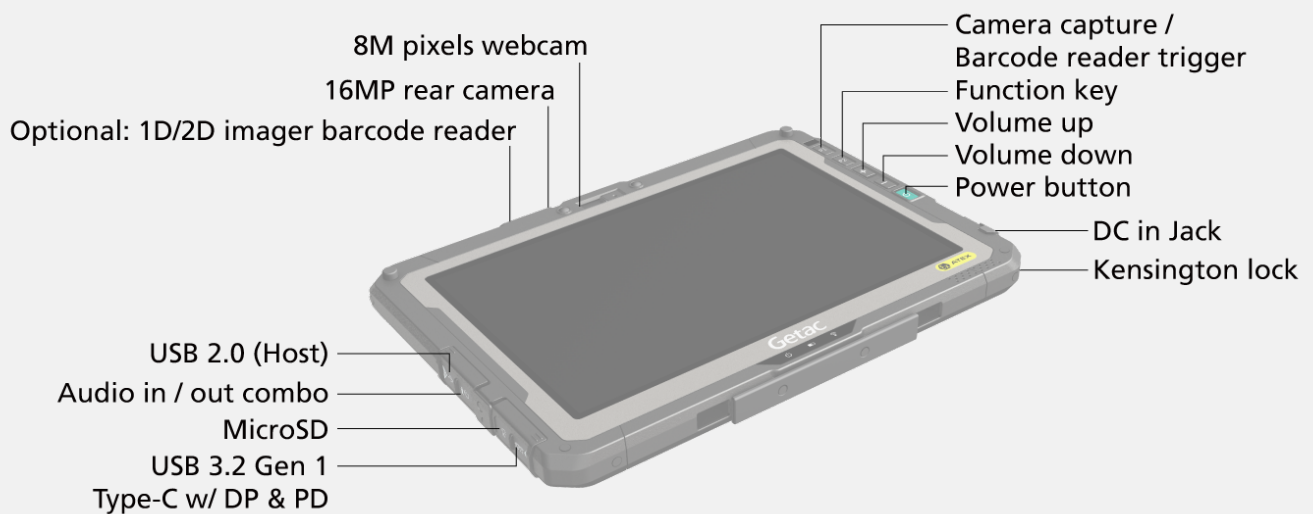

## SPECIFICATIONS

### Operating System

Android™ 12.0

### Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core  
1.95GHz Max. 2.2GHz

### VGA Controller

Qualcomm® Adreno™ 512 GPU

### Display

10.1" TFT LCD WUXGA (1920 x 1200)  
Protection film  
800 nits LumiBond display with Getac sunlight readable technology  
Capacitive multi-touch screen

### Storage & Memory

4GB LPDDR4, 64GB eMMC  
Optional: 6GB LPDDR4, 128GB eMMC

### Device Button

Power button  
4 tablet programmable buttons

### Pointing Device

Touchscreen  
- Capacitive multi-touch screen

### Expansion Slot

Optional: 1D/2D imager barcode reader  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader †

### I/O Interface

8M pixels webcam x 1  
16M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-C w/ DP & PD x 1  
USB 2.0 (Host) x 1  
MicroSD x 1

### Communication Interface

Wi-Fi 802.11 a/b/g/n/ac  
Bluetooth (v5.0) †  
Dual Micro SIM  
Dedicated GPS  
Optional: 4G LTE mobile broadband

### Security Feature

Kensington lock  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader †

### Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery(3.84V, typical 4990mAh;  
min. 4870mAh)x 2  
Optional: High capacity Li-ion battery (3.84V,  
typical 9980mAh; min. 9470mAh) x 2

### Dimension (W x D x H) & Weigh

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")  
1.04kg (2.40lbs) ††

### Rugged Feature

MIL-STD-810H certified  
IP66 certified  
Vibration & 6 feet (1.8m) drop resistant  
ATEX & IECEx certified

### Environmental Specification

Temperature ††:  
- Operating: -21°C to 55°C / -5.8°F to 131°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

### Explosion Protection

ATEX/IECEx Zone 2/22  
Ex II 3G Ex ic op is IIC T4 Gc  
Ex II 3D Ex ic op is IIIC T130°C Dc

### Pre-installed Software

Getac Camera  
Getac Input Method  
Getac Driving Safety Utility (trial version)  
Getac deployXpress (trial version)  
Getac settings and Google applications (Search, Chrome,  
Gmail, Maps, YouTube, Play, Drive, YouTube music,  
Google TV, Duo and photos)  
Getac enrollXpress

### Optional software

Getac Driving Safety Utility  
Getac deployXpress  
Getac OEMConfig

### Accessories

Battery (3.84V, typical 4990mAh;  
min. 4870mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Capacitive hard tip stylus & tether

### Optional:

Carry bag  
Battery (3.84V, typical 4990mAh;  
min. 4870mAh)  
High capacity Li-ion battery (3.84V,  
typical 9980mAh; min. 9470mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
100W Type-C AC adapter  
Protection film  
Rotating hand strap with kickstand  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Capacitive hard tip stylus & tether  
Hard handle †

### Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

### Standard

Garantie Bumper-to-Bumper de 3 ans

# ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Factory option. Not user-swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140  
Villebon sur Yvette Tel: +33 160 12 80 60  
Sales-Getac-France@getac.com |  
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.