




ZX80W-EX FULLY RUGGED TABLET

- Certification ATEX et CEIEx Zone 2/22 pour un usage en zones explosives
- Processeur octa-core Qualcomm® QCS6490 avec Windows 11 IoT Enterprise LTSC
- Conception légère avec batteries haute capacité remplaçables à chaud pour un fonctionnement prolongé et ininterrompu sur le terrain
- Écran LumiBond FHD de 8 pouces avec technologie Getac de lecture en plein soleil (1 000 nits)
- Certification MIL-STD-810H et IP67, avec résistance aux chutes de 1,8 m (6 pi)
- Plusieurs configurations avec des outils de gestion de niveau entreprise dans un facteur de forme fin et léger

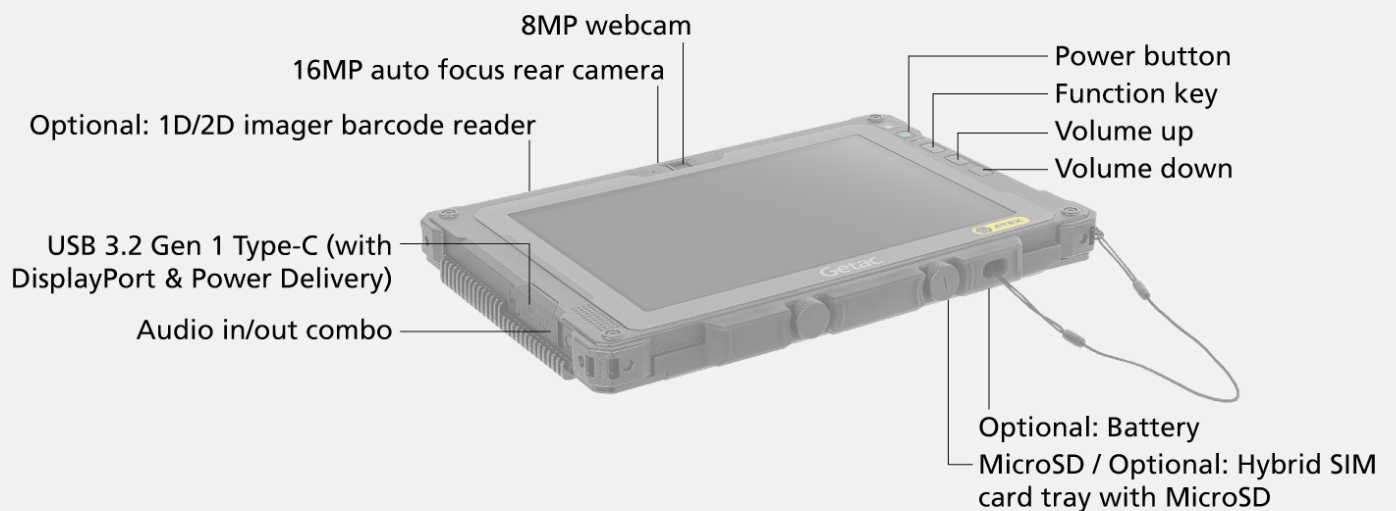

SPECIFICATIONS

Generation

G1

Operating System

Windows 11 IoT Enterprise LTSC

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)

Anti-static protection film

1,000 nits LumiBond display with Getac sunlight readable

technology

Capacitive multi-touch screen

Storage & Memory

12GB LPDDR5, 256GB UFS

Keyboard

Power button

3 tablet programmable buttons

Default: Windows Key, Volume up, Volume down

Pointing Device

Touchscreen

- Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated speaker

Integrated dual-array microphone

Expansion Slot

Optional: 1D/2D imager barcode reader

I/O Interface

8MP webcam x 1

16MP auto focus rear camera x 1

Audio in/out combo x 1

USB 3.2 Gen 1 Type-C (with DisplayPort & Power Delivery) x 1

MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 4FF)

tray with MicroSD x 1¹

Communication Interface

Wi-Fi 6E 802.11ax

Bluetooth (v5.2)ⁱⁱ

Dedicated L1/L5 GPSⁱⁱⁱ

Optional: 4G LTE mobile broadbandⁱ

Optional: 5G Sub-6ⁱ

Optional: Dual SIM (Nano-SIM 4FF and e-SIM)ⁱ

Security Feature

fTPM (Qualcomm TrustZone)

Getac Secure Erase

Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)

Battery Options:

Battery bay cover (Default)

Battery (3.84V, typical 4990mAh; min. 4870mAh)

Dimension (W x D x H) & Weight

243.2 x 165.1 x 23.1mm (9.57" x 6.50" x 0.90")

780g (1.72lbs)^{iv}

Rugged Feature

MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant^v

ATEX & IECEx certified

Environmental Specification

Temperature^{vi}:

- Operating: -21°C to 55°C / -5.8°F to 131°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T4 Gc

Ex II 3D Ex ic op is IIIc T130°C Dc

Pre-installed Software

Getac Utility

Getac KeyWedge Barcode Reader Utility (trail version)

Optional software

Getac KeyWedge Barcode Reader Utility

Getac Monitoring

Accessories

Digitizer pen

Optional:

Battery (3.84V, typical 4990mAh; min. 4870mAh)

65W USB-C AC Adapter

65W USB-C Vehicle adapter

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

Digitizer pen with tether

Anti-static protection film

Hand strap with stylus holder

Rotating hand strap with kickstand

Shoulder strap (2-point)

Vehicle cradle

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier lorsque les produits sont soumis à des conditions difficiles, et peuvent engendrer une mise hors service des équipements et des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

3 ans Bumper-to-Bumper

ZX80W-EX FULLY RUGGED TABLET

- I. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- IV. Weight and dimensions vary from configurations and optional accessories.
- V. Drop test results vary from configurations and optional accessories.
- VI. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140

Villebon sur Yvette Tel: +33 160 12 80 60

Sales-Getac-France@getac.com |

www.getac.com/fr/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.