




Copilot+PC



B360X Pro FULLY RUGGED LAPTOP

- Pronto per l'AI con i più recenti processori Intel® Core™ Ultra (Serie 3) e la tecnologia Intel® AI Boost
- Discrete graphic NVIDIA® Quadro® RTX PRO™ 500 Blackwell 6GB opzionale
- Certificazioni MIL-STD 810H e IP66, classificazione per cadute fino a 1,8 m e opzione resistenza alla nebbia salina
- Display LumiBond WUXGA da 14" con tecnologia Getac per la leggibilità alla luce diretta del sole (1.400 nit) e touchscreen capacitivo
- Sicurezza aziendale avanzata con la Windows Hello face-authentication camera e l'opzione doppio storage sostituibile dall'utente, lettore barcode 1D/2D integrato e opzioni di autenticazione multi-factor

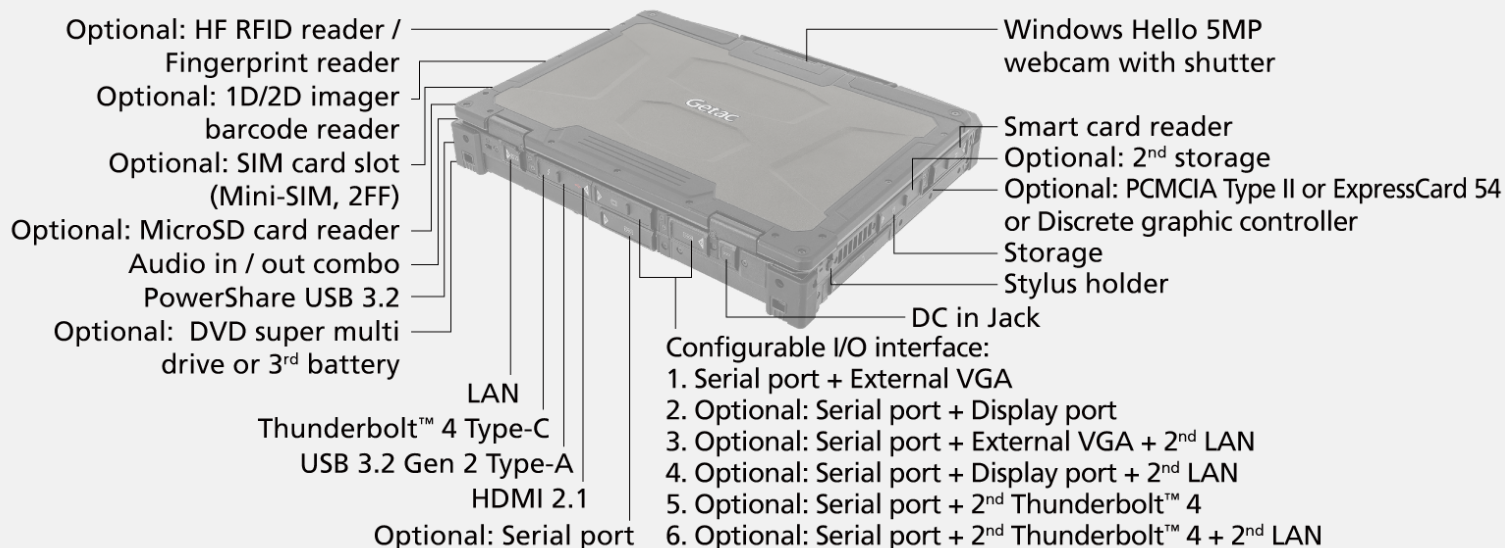

SPECIFICATIONS

Generation
G4

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ Ultra 5 processor 336H, vPro® Enterprise
Max. 4.6GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Platform options:
Intel® Core™ Ultra 7 processor 356H
Max. 4.7GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 366H, vPro® Enterprise
Max. 4.8GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Graphics
Intel® Graphics
Optional: NVIDIA® RTX PRO™ 500 Blackwell 6GB discrete graphic controller^{L, 8}

NPU
Intel® AI Boost

Display
14" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,400 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2nd storage^{III} :
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard
LED backlit membrane keyboard

Pointing Device
Touchscreen
- Capacitive multi-touch screen

Touchpad
- Touchpad with two buttons

Audio
Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot
Smart card reader x 1
Optional: MicroSD card reader x 1
Optional: Discrete graphics controller, or PCMCIA Type II, or ExpressCard/54⁹
Optional: 1D/2D imager barcode reader

Multimedia Bay
Configurable options^{IV} :
Optional: DVD super multi drive or 3rd battery

I/O Interface
Windows Hello face-authentication SMP camera (front-facing) x 1
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
LAN (RJ45) x 1
HDMI 2.1 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF)^V
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options^{VI}:
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1
6. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1 + 2nd LAN (RJ45) x 1

Communication Interface
10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE211, 802.11be
Bluetooth (v6.0)^{VII}
Optional: Dedicated GPS with L1/L5^{VIII}
Optional: 4G LTE mobile broadband with integrated GPS^{VIII, IX, X}
Optional: 5G Sub-6 with integrated L1/L5 GPS^{VIII, IX, X}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM)^{X, X}

Security Feature
TPM 2.0
Kensington lock
Smart card reader
Getac Disk Wipe
Optional: Fingerprint reader^{XI}
Optional: HF RFID reader^{XI, XII}

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
AC adapter (90W, 100-240VAC, 50/60Hz) i
Hot-swappable High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1

Dimension (W x D x H) & Weight
342 x 281 x 49.8mm (13.46" x 11.06" x 1.96")^{XIII}
3.14kg (6.92lbs)^{XIV}

Rugged Feature
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{XV}
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{XVI}
Optional: Salt fog certified

Environmental Specification
Temperature^{XVII} :
- Operating: -29°C to 63°C / -20°F to 145°F^{XVIII}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Utility
Getac Geolocation
Getac Barcode Manager^{XIX}
Optional: Absolute Persistence®

Optional Software
Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{XX}

Accessories
Hot-swappable High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:
Carry bag
Hot-swappable High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
AC adapter (120W, 100-240VAC) i
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle^{XXI}
Vehicle dock^{XII}
Office dock
Spare SSD kit
100W Type-C adapter

Bumper-to-Bumper Warranty
Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard
3 anni Bumper-to-Bumper

B360X Pro FULLY RUGGED LAPTOP

- I. 120W AC adapter is used for office dock and 90W AC adapter for device configured with discrete graphics card.
- II. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- III. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- IV. Factory option. Not user swappable.
- V. Units with 4G/5G option come with an embedded SIM card slot.
- VI. External VGA, Display port, and 2nd Thunderbolt™ 4 Type-C are mutually exclusive.
- VII. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- IX. Only available in the US, UK, EU, Australia, and New Zealand.
- X. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XI. Fingerprint reader and HF RFID reader are mutually exclusive.
- XII. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XIII. Product height is 49.8 mm; maximum height is 55.2 mm including bumper.
- XIV. Weight and dimensions vary from configurations and optional accessories.
- XV. MIL-STD-461 90W AC adapter sold separately.
- XVI. Available with limited configurations and environment conditions.
- XVII. Tested by an independent third-party test lab following MIL-STD-810H.
- XVIII. For optional DVD super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XIX. Available when barcode reader option is selected.
- XX. Models require either embedded or standalone GPS module.
- XXI. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



GETAC TECHNOLOGY CORPORATION
Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com |
www.getac.com/it/
Copyright © 2026 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.