


## F110 WMS FULLY RUGGED TABLET



- 11th Generation Intel® Core™ i3 Processor
- Thunderbolt™ 4 brings lightning speed and performance
- 11.6 FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen

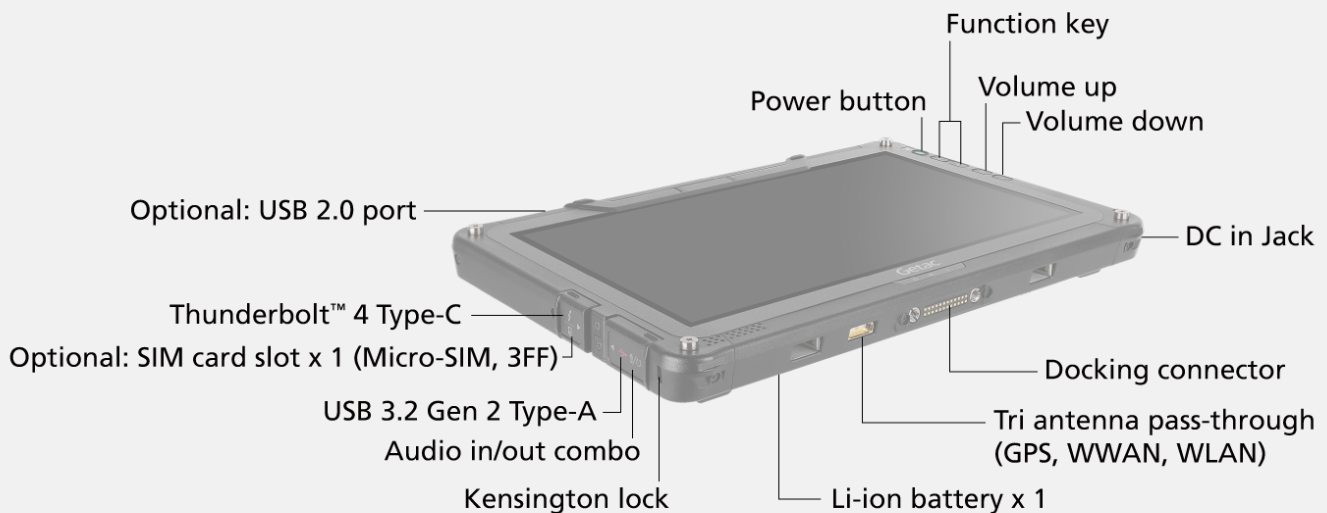

## SPECIFICATIONS

### Generation

G6

### Operating System

Windows 10 IoT

### Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor  
Max. 4.1GHz with Intel® Turbo Boost  
Technology - 6MB Intel® Smart Cache

### VGA Controller

Intel® UHD Graphics

### Display

11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

### Storage & Memory

8GB DDR4  
256GB PCIe NVMe SSD

### Keyboard

Power button  
4 tablet programmable buttons

### Pointing Device

Touchscreen  
- Capacitive multi-touch screen

### Expansion Slot

Optional: USB 2.0 port

### I/O Interface

Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 2 Type-A x 1  
Thunderbolt™ 4 Type-C x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Micro-SIM, 3FF) <sup>i</sup>  
RF antenna pass-through for GPS,  
WWAN and WLAN

### Communication Interface

Intel® Wi-Fi 6 AX201, 802.11ax  
Bluetooth (v5.2) <sup>ii</sup>  
Optional: 4G LTE mobile broadband  
with integrated GPS <sup>i</sup>

### Security Feature

TPM 2.0  
Kensington lock

### Power

Li-ion battery (11.4V, typical 2680mAh;  
min. 2640mAh) x 1 <sup>iii,iv</sup>

### Dimension (W x D x H) & Weight

314 x 207 x 25mm (12.4" x 8.15" x 0.98")  
1.35kg (2.97lbs) <sup>v</sup>

### Rugged Feature

MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified <sup>vi</sup>  
Vibration & 6ft (1.8m) drop resistant

### Environmental Specification

Temperature <sup>vii</sup> :  
- Operating:  
-29°C to 63 °C / -20°F to 145°F  
(when docked and/or powered by  
an external power supply)  
-10°C to 63 °C / 14°F to 145°F  
(when undocked and only powered  
by one battery)

- Storage: -51°C to 71 °C / -60°F to 160°F  
Humidity: - 95% RH, non-condensing

### Pre-installed Software

Getac Utility  
Getac Geolocation  
Getac Driving Safety Utility (trial version)  
Optional: Absolute Persistence®

### Optional software

Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility <sup>viii</sup>

### Accessories

Battery (11.4V, typical 2680mAh;  
min. 2640mAh)  
Capacitive stylus with tether

### Optional:

Carry bag  
Battery (11.4V, typical 2680mAh;  
min. 2640mAh)  
High capacity Li-ion battery (11.1V,  
typical 4200mAh; min.4080mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (90W, 100-240VAC, 50 / 60Hz)  
Office dock AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Capacitive stylus with tether  
Protection film  
Hard handle  
Hand strap  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Detachable keyboard  
Vehicle cradle <sup>ix</sup>  
Vehicle dock <sup>ix</sup>  
Office dock  
Spare SSD kit  
100W Type-C adapter  
Getac rugged keyboard

### Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

### Standard

3 anni Bumper-to-Bumper

# F110 WMS FULLY RUGGED TABLET

- I. Units with 4G LTE option come with an embedded SIM card slot.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. At the point of purchase, the second battery will be fitted with a dummy battery.
- IV. The second battery is sold separately; units with two batteries installed support the LifeSupport battery swappable technology.
- V. Weight and dimensions vary from configurations and optional accessories.
- VI. MIL-STD-461 90W AC adapter sold separately.
- VII. Tested by an independent third-party test lab following MIL-STD-810H.
- VIII. Models require the embedded GPS module.
- IX. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI 1.4	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,  
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)  
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2023 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only, available specification shall be subjected to  
quotation by request.