




K120-EX FULLY RUGGED TABLET

- Certificazione ATEX / IECEx Zona 2 / 22 potenzialmente esplosiva
- Processore Intel® Core™ i7 / i5 vPro™ di 13° generazione
- Display FHD da 12,5 pollici dotato di tecnologia Getac LumiBond per la leggibilità alla luce diretta del sole (1200 nit) e touch screen capacitivo
- Sicurezza aziendale migliorata con le opzioni Intel vPro, TPM 2.0, Windows Hello face-authentication 5MP camera e autenticazione multi-factor

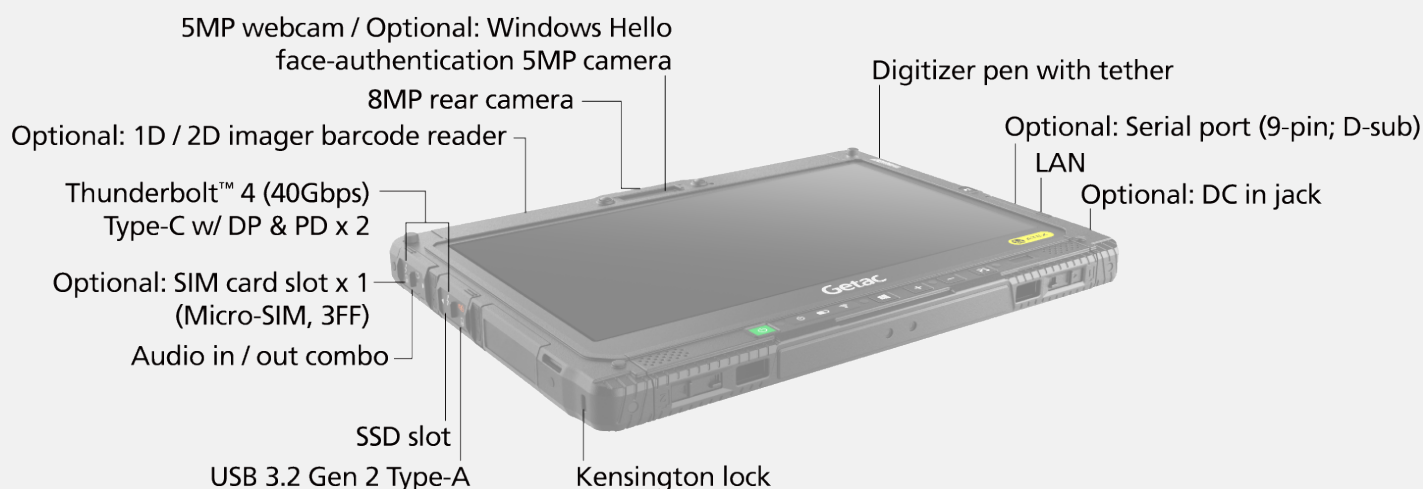

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1335U Processor
Max. 4.6GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1345U vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1355U Processor
Max. 5.0GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1365U vPro® Processor
Max. 5.2GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Graphics

Intel® Iris® X^e Graphics ⁱ

Display

12.5" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Anti-static protection film
1,200 nits LumiBond display with Getac sunlight readable technology

Storage & Memory

16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
– Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Serial port (9-pin; D-sub)

I/O Interface

5MP webcam x 1 ⁱⁱ
8MP auto focus rear camera x 1
Audio in/out combo x 1
Optional: DC in Jack x 1 ⁱⁱⁱ
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 2
LAN (RJ45) x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^{iv}
Optional: Windows Hello face-authentication
5MP camera (front-facing) ⁱⁱ

Communication Interface

10/100/1000 base-T Ethernet
Intel® WiFi 6E AX211, 802.11ax
Bluetooth (v5.3) ^v
Optional: Dedicated GPS with L1/L5 ^{vi}
Optional: 5G Sub-6 with integrated L1/L5 GPS ^{iv, vii, viii}
Optional: Dual SIM (Micro-SIM 3FF and e-SIM) ^{iv, vii}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Windows Hello face-authentication
5MP camera (front-facing) ⁱⁱ
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC) ⁱⁱⁱ
USB-C AC adapter (65W, 100-240VAC, 50/60Hz) ⁱⁱⁱ
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

Dimension (W x D x H) & Weight

Tablet
329.5 x 238 x 24mm (12.97" x 9.37" x 0.94")
1.7kg (3.75lbs) ^{ix}

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6ft (1.8m) drop resistant ^x
ATEX & IECEx certified

Environmental Specification

Temperature ^{xi} -
- Operating: -21°C to 55°C / -5.8°F to 131°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xii}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Monitoring
Getac VGPS Utility ^{xiii}

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)
Digitizer pen with tether

Optional:

Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
USB-C AC adapter (65W, 100-240VAC, 50/60Hz)
Digitizer pen with tether
Anti-static protection film
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Spare SSD kit

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

K120-EX FULLY RUGGED TABLET

- I. Units equipped with dual channel memory come with Intel® Iris® X^e Graphics.
- II. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- III. The DC in jack option comes with a 65W AC Adapter in the box as default, instead of a USB-C AC adapter.
- IV. Units with 4G/5G option come with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VIII. 5G Sub-6 only available in USA, UK and EU.
- IX. Weight and dimensions vary from configurations and optional accessories.
- X. Drop test results vary from configurations and optional accessories.
- XI. Tested by an independent third-party test lab following MIL-STD-810H.
- XII. Available when barcode reader option is selected.
- XIII. Models require either embedded or standalone GPS module.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com | www.getac.com/it/
Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.