




## Copilot+PC



- Incrementa la produttività con i processori AMD Ryzen™ AI e Copilot+ PC, fornendo prestazioni potenziate dall'intelligenza artificiale ottimizzate per applicazioni edge
- Display da 15.6" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits) e touchscreen capacitivo utilizzabile con i guanti
- Chassis sostenibile con robustezza ad alto livello per un futuro più green
- Maggiore sicurezza aziendale con AMD PRO, Windows Hello face-authentication camera, TPM 2.0 e molte altre opzioni di autenticazione multi-factor
- Connettiti con sicurezza utilizzando versatili opzioni I/O, incluse le robuste soluzioni USB Type-C e docking

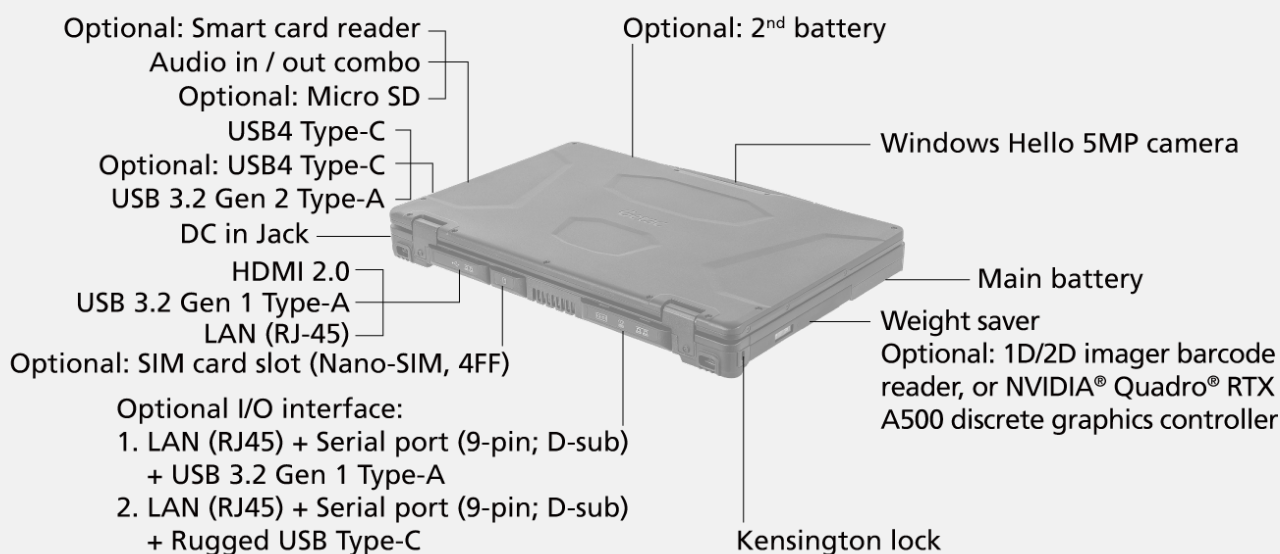

SPECIFICATIONS

**Generation**  
G1

**Operating System**  
Windows 11 Pro

**CPU (Mobile Computing Platform)**  
AMD Ryzen™ AI 5 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

**Platform options:**  
AMD Ryzen™ AI 5 PRO 340 Processor  
(6-core/12-thread, 22MB cache, up to 4.8 GHz max boost)

AMD Ryzen™ AI 7 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

AMD Ryzen™ AI 7 PRO 350 Processor  
(8-core/16-thread, 24MB cache, up to 5.0 GHz max boost)

**Graphics**  
AMD Radeon™ 840M  
(For AMD Ryzen™ AI 5 340 Processor)  
AMD Radeon™ 860M  
(For AMD Ryzen™ AI 7 350 Processor)  
Optional: NVIDIA® Quadro®  
RTX A500 discrete graphics controller<sup>i ii</sup>

**NPU**  
AMD XDNA™ 2 (Up to 50 TOPS)

**Display**  
15.6" TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits display with Getac sunlight readable technology  
Optional: Capacitive multi-touch LumiBond screen

**Storage & Memory**  
16GB DDR5  
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

**Keyboard**  
LED backlit membrane keyboard

**Pointing Device**  
Touchscreen  
- Optional: Capacitive multi-touch screen  
Touchpad  
- Glide touchpad with multi-touch

**Expansion Slot**  
Optional: Smart card reader

**Multimedia Bay**  
Weight saver  
Optional: 1D/2D imager barcode reader<sup>ii</sup>  
Optional: NVIDIA® Quadro®  
RTX A500 discrete graphics controller<sup>i ii</sup>

**I/O Interface**  
Audio in/out combo x 1  
DC in Jack x 1  
USB4 Type-C x 1  
USB 3.2 Gen 2 Type-A x 1  
USB 3.2 Gen 1 Type-A x 1  
Optional: MicroSD x 1  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Optional: SIM card slot x 1 (Nano-SIM, 4FF)<sup>iii</sup>  
Windows Hello face-authentication  
5MP camera (front-facing) x 1  
Docking connector x 1  
Optional:USB4 Type-C x 1  
Optional: RF antenna pass-through for GPS,  
WWAN , and WLAN

**Configurable I/O options :**  
1. LAN (RJ45)<sup>iv</sup> + Serial port (9-pin; D-sub)  
+ USB 3.2 Gen 1 Type-A  
2. LAN (RJ45)<sup>iv</sup> + Serial port (9-pin; D-sub)  
+ Rugged USB Type-C

**Communication Interface**  
10/100/1000 base-T Ethernet  
Intel® Wi-Fi 7, 802.11be<sup>v</sup>  
Bluetooth (v5.4)<sup>v</sup>  
Optional: 2.5GBASE-T Ethernet<sup>iv</sup>  
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)<sup>iii, vi</sup>  
Optional: 4G LTE mobile broadband with integrated GPS<sup>iii, viii</sup>  
Optional: 5G Sub-6 with integrated GPS<sup>ii, vii, viii</sup>  
Optional: Dedicated GPS with L1/L5

**Security Feature**  
TPM 2.0  
Kensington lock  
Windows Hello face-authentication 5MP camera (front-facing)  
Optional: AMD PRO Technology  
Optional: Fingerprint reader  
Optional: HF RFID reader<sup>ix</sup>  
Optional: Absolute Persistence®

**Power**  
Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)  
Optional: 2nd battery (10.8V, typical 6900mAh; min. 6600mAh)<sup>i</sup>  
Optional: AC adapter (90W, 100-240VAC, 50/60Hz)<sup>i</sup>

**Dimension (W x D x H) & Weight**  
375 x 277 x 39mm (14.8" x 10.9" x 1.5")<sup>x</sup>  
2350g (5.18lbs)<sup>x</sup>

**Rugged Feature**  
MIL-STD-810H certified  
IP53 certified  
Vibration & 3ft (0.9m) drop resistant<sup>xi</sup>

**Environmental Specification**  
Temperature<sup>xii</sup> :  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

**Pre-installed Software**  
Getac Utility  
Getac Geolocation  
Getac Barcode Manager<sup>xiii</sup>  
Optional: Absolute Secure Endpoint  
Optional: Absolute Secure Access

**Optional software**  
Getac Driving Safety Utility  
Getac Monitoring  
Getac VGPS Utility<sup>xiv</sup>

**Accessories**  
Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)

**Optional:**  
Carry bag  
Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (90W, 100-240VAC, 50/60Hz)<sup>i</sup>  
DC-DC vehicle adapter (120W, 11-32VDC)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle  
Vehicle dock<sup>xv</sup>  
Spare SSD kit  
100W Type-C adapter  
DS100 USB-C Docking Station  
Rugged USB-C Cable

**Warranty**  
La miglior testimonianza della qualità è la presenza del produttore a garanzia del proprio device. Abbiamo progettato il notebook rugged dall'inizio alla fine per renderlo resistente a urti, cadute, vibrazioni e non solo. Siamo fiduciosi della qualità dei nostri prodotti ed è per questo che il notebook gode di una garanzia di 3 anni, leader del settore. E' la tranquillità di sapere che siete coperti.

**Standard**  
Garanzia Limited di 3 anni

S510AD RUGGED LAPTOP

- I. NVIDIA® Quadro® RTX A500 discrete graphics controller is required to configure with dual battery and 90W AC adapter.
- II. NVIDIA® Quadro® RTX A500 discrete graphics controller and 1D/2D imager barcode reader are mutually exclusive options.
- III. Units with 4G/5G option come with an embedded SIM card slot.
- IV. The optional 2<sup>nd</sup> LAN is 2.5G BASE-T Ethernet.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that are operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. Only available in the US, UK, EU, Australia, and New Zealand.
- VIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- IX. 13.56MHz HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber-Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

| Vehicle Dock (Gamber-Johnson, Havis) |                                             | DS100 USB-C Docking Station                 |
|--------------------------------------|---------------------------------------------|---------------------------------------------|
| Serial Port                          | 1                                           | -                                           |
| Audio Output                         | -                                           | 1                                           |
| DC in Jack                           | 1                                           | 1                                           |
| USB                                  | USB-A 3.0 x 2, USB-A 2.0 x 2, USB-C 3.0 x 1 | USB-A 2.0 x 2, USB-A 3.2 x 3, USB-C 3.2 x 2 |
| LAN                                  | 1                                           | 1                                           |
| HDMI                                 | 1                                           | 1                                           |
| Display Port                         | -                                           | 2                                           |
| RF Antenna Connector                 | 3 (WWAN, WLAN, GPS)                         | -                                           |
| Kensington Lock                      | -                                           | -                                           |



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,  
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)  
Tel: +39 039 8901584  
Sales-getac-Italy@getac.com | www.getac.com/it/  
Copyright © 2025 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only,available specification shall be subjected to  
quotation by request.