


## T800 FULLY RUGGED TABLET



- Display da 8,1" HD LumiBond 2.0, per una migliore visualizzazione
- Funzione brevettata Getac componenti aggiuntivi SnapBack: Lettore di Smart Card e lettore RFID contactless combinato o seconda batteria
- Scelta tra lettore di codici a barre 1D/2D imager, oppure porta seriale o Ethernet
- Certificato MIL-STD-810G e IP65
- Sicurezza aziendale aumentata con TPM2.0 e Windows Disk Encryption



T800 3D demo

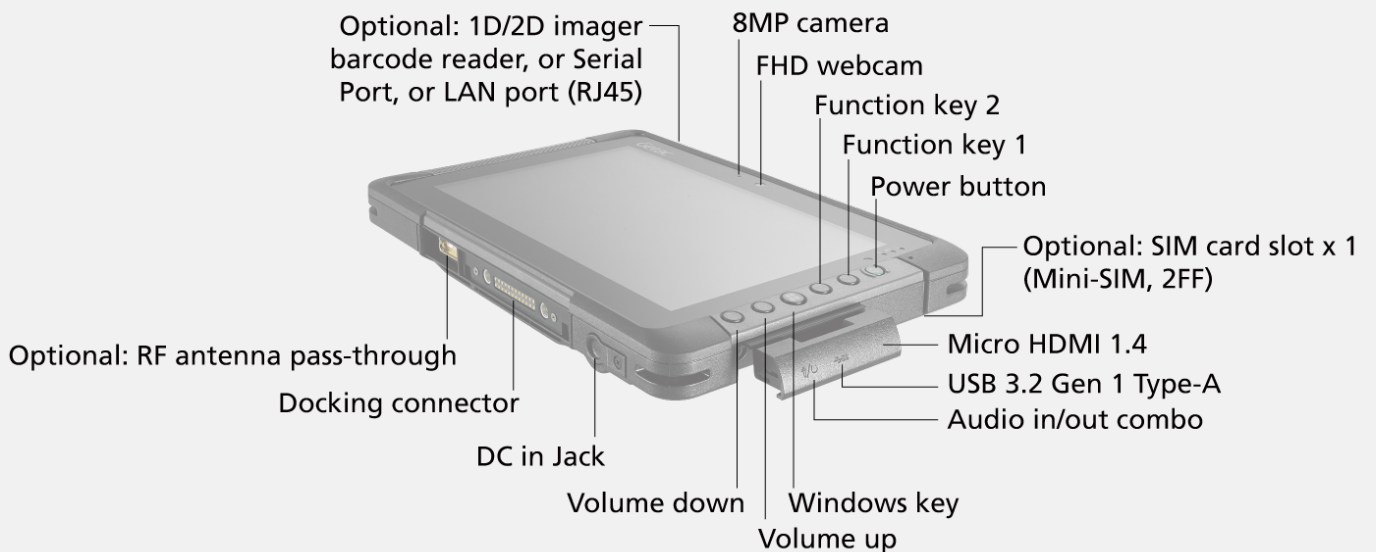

## SPECIFICATIONS

### Generation

G2

### Operating System

Windows 10 IoT Enterprise

### Mobile Computing Platform

Intel® Atom Processor x7-Z8750 1.6GHz, burst up to 2.56GHz  
- 2MB Cache

### VGA Controller

Intel® HD Graphics

### Display

8.1" Wide Viewing Angle TFT LCD WXGA (1280 x 800)  
Protection film  
600 nits LumiBond display with Getac sunlight readable technology

### Storage & Memory

4GB LPDDR3  
Optional: 8GB LPDDR3

128GB eMMC  
Optional: 256GB eMMC

### Keyboard

Power button  
5 tablet programmable buttons

### Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional: Dual mode touchscreen (multi-touch and digitizer)

### Expansion Slot

Optional: 1D/2D imager barcode reader, Serial port, Ethernet<sup>i</sup>  
Optional: SnapBack add-on: Smart card and HF RFID/NFC reader combo<sup>ii</sup>  
Optional: SnapBack add-on: 2<sup>nd</sup> expanded battery<sup>ii</sup>  
Optional: SnapBack add-on: Smart card and magnetic stripe reader<sup>ii</sup>

### I/O Interface

FHD webcam x 1  
8M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-A x 1  
Micro HDMI 1.4 x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Mini-SIM, 2FF)<sup>iii</sup>  
Optional: RF antenna pass-through for GPS, WWAN and WLAN

### Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax  
Bluetooth (v5.2)<sup>iv</sup>  
Optional: Dedicated GPS  
Optional: 4G LTE mobile broadband<sup>iii</sup>  
Optional: 10/100/1000 base-T Ethernet (Occupies expansion slot)

### Security Feature

TPM 2.0  
Optional: SnapBack add-on: Smart card and HF RFID/NFC combo reader<sup>ii,v</sup>  
Optional: SnapBack add-on: Smart card and magnetic stripe reader<sup>ii</sup>

### Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh)  
LifeSupport battery swappable technology (only with SnapBack 2<sup>nd</sup> expanded battery)

### Dimension (W x D x H) & Weight

227 x 151 x 24 mm (8.93" x 5.94" x 0.94")<sup>vi</sup>  
0.88kg (1.94 lbs)<sup>vi</sup>

### Rugged Feature

MIL-STD-810H certified  
IP65 certified  
MIL-STD-461G certified  
Vibration & 6ft (1.8m) drop resistant<sup>vii</sup>  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)<sup>viii</sup>

### Environmental Specification

Temperature<sup>ix</sup>:  
- Operating: -21°C to 50°C / -6°F to 122°F  
- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:  
- 95% RH, non-condensing

### Pre-installed Software

Getac Utility  
Getac Camera  
Getac Barcode Manager<sup>x</sup>  
Getac Driving Safety Utility (trial version)  
Getac KeyWedge Barcode Reader Utility (trial version)  
Optional: Absolute Persistence<sup>z</sup>

### Optional software

Getac Driving Safety Utility  
Getac KeyWedge Barcode Reader Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility<sup>yy</sup>

### Accessories

Battery (7.4V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

### Optional:

Carry bag  
Battery (7.4V, typical 4200mAh; min. 4080mAh)  
2<sup>nd</sup> expanded battery (14.4V, 2100mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay expanded battery dock with adapter (Six-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
Office dock AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen with tether  
Capacitive stylus with tether  
Protection film  
Hand strap  
Shoulder strap (2-point)  
Wrist strap  
Vehicle cradle<sup>xii</sup>  
Vehicle dock<sup>xii</sup>  
Office dock

### Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

### Standard

3 anni Bumper-to-Bumper

# T800 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, Serial port, and Ethernet, are mutually exclusive options.
- II. All SnapBack add-ons are mutually exclusive options.
- III. Units with 4G LTE option come with an embedded SIM card slot.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.
- XII. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

|                      | Vehicle dock        | Office Dock |
|----------------------|---------------------|-------------|
| Serial Port          | 1                   | -           |
| External VGA         | -                   | 1           |
| Microphone           | 1                   | 1           |
| Audio Output         | 1                   | 1           |
| DC in Jack           | 1                   | 1           |
| USB                  | 2                   | 4           |
| LAN                  | 1                   | 1           |
| HDMI 1.4             | -                   | 1           |
| RF Antenna Connector | 3 (WWAN, WLAN, GPS) | -           |

# Getac



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,  
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)  
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.