


UX10 FULLY RUGGED TABLET



- Processore Intel® Core™ i5/i7 di 12ª generazione.
- Display da 10.1" FHD Lumibond con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits) e touchscreen capacitivo.
- Potenziamento della sicurezza aziendale con l'optional Intel vPro®, e le opzioni Windows Hello camera con autenticazione facciale e autenticazione multi-fattore.
- Versatile connettività I/O che include Thunderbolt™ 4.
- Performance Wi-Fi, GPS e LTE avanzate.



UX10 3D demo

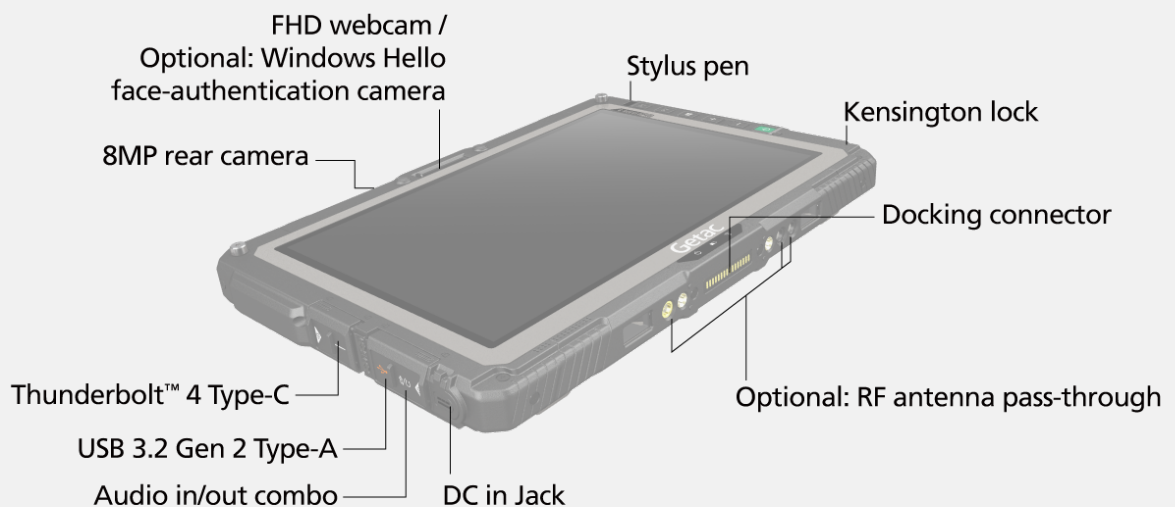

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Pentium™ 8505 Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Graphics

Intel® UHD Graphics

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac
sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Optional (top side): 1D/2D imager barcode reader,
or Serial port, or USB 3.2 Gen 1 Type-A port,
or LAN port (RJ45), or microSD
or HF RFID readerⁱ,
or HDMI 2.0ⁱⁱ
Optional (right side): LAN port (RJ45)
or Fingerprint readerⁱⁱⁱ
Optional (back side): Smart card reader,
or Bridge battery, or Bridge battery +
Smart card reader^{iv}

I/O Interface

FHD webcam x 1^v
8MP auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF)^{ix}
Optional: Windows Hello face-authentication camera
(front-facing) x 1^v
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

Optional: 10/100/1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3)^{vi}
Optional: Dedicated GPS with L1/L5^{ix}
Optional: 4G LTE mobile broadband with
integrated GPS^{viii, ix}
Optional: 5G Sub-6 with integrated GPS^{viii, ix}
Optional: Dual SIM (Micro-SIM 3FF and e-SIM)^{viii, ix}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID readerⁱⁱ
Optional: Fingerprint readerⁱⁱⁱ
Optional: Smart card reader^{iv}
Optional: Windows Hello face-authentication
camera (front-facing)^v
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1
Optional: Bridge battery^{iv}

Dimension (W x D x H) & Weight

279 x 194.5 x 23.5mm (10.98" x 7.65" x 0.92")^{*}
1.22kg (2.68lbs)

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xi}
Vibration & 6ft (1.8m) drop resistant^{xii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{xiii}

Environmental Specification

Temperature^{xiv}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xv}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac Monitoring
Getac VGPS Utility^{xvi}

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Folio case
Battery (11.1V, typical 4200mAh; min. 4080mAh)
High capacity Li-ion battery (10.8V, 9240 mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle^{xvii}
Keyboard dock
Vehicle dock^{xviii}
Office dock
100W Type-C adapter
Getac DS100 USB-C docking station with AC adapter

UX10 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

- I. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, LAN port (RJ45), HF RFID reader, MicroSD and HDMI 2.0 are mutually exclusive options.
- III. Fingerprint reader and LAN Port are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VIII. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 90W AC adapter sold separately.
- XII. Drop test results vary from configurations and optional accessories.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. Available when barcode reader option is selected.
- XVI. Models require either embedded or standalone GPS module.
- XVII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	-	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	1	1

Getac



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.