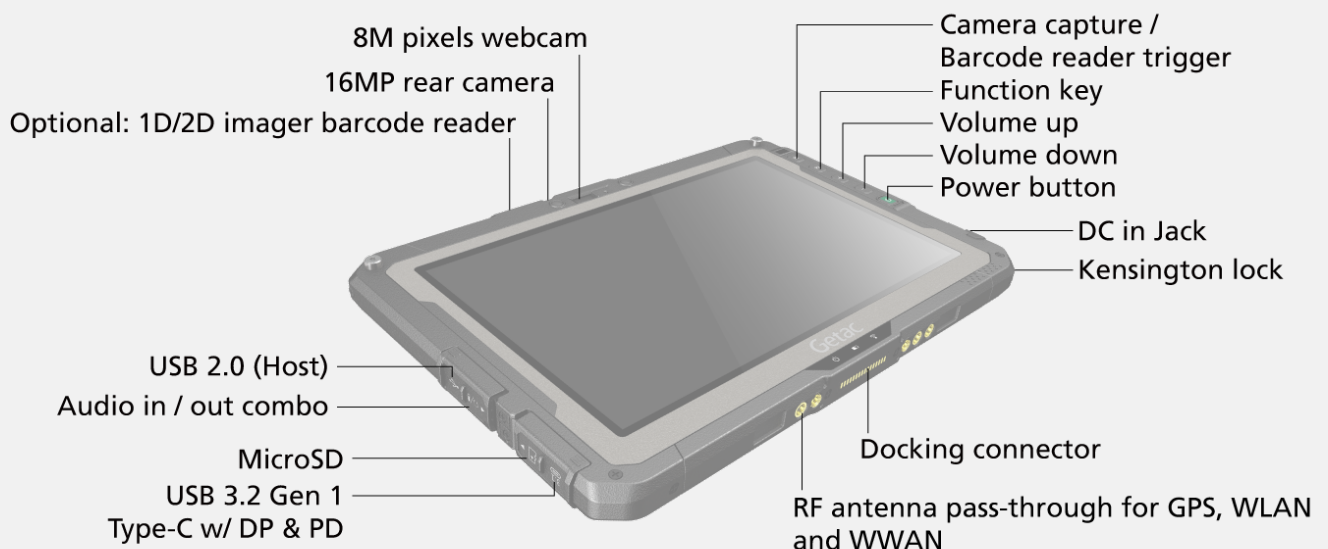# ZX10-IP FULLY RUGGED TABLET

- Processore Qualcomm® Snapdragon™ 660, Octa-core
- Doppia batteria sostituibile a caldo per un funzionamento ininterrotto
- Schermo Lumibond da 10.1" con tecnologia Getac leggibile alla luce del sole e touchscreen capacitivo, utilizzabile con i guanti
- Certificato per cadute fino a 1,8 metri (6ft), MIL- STD-810H e IP66
- Verificato come Android enterprise recommended [vi]

CERTIFIED MIL-STD 810H

INGRESS PROTECTION IP66

6' DROP

ZX10-IP 3D demo

8M pixels webcam
16MP rear camera
Optional: 1D/2D imager barcode reader

Camera capture / Barcode reader trigger
Function key
Volume up
Volume down
Power button

DC in Jack
Kensington lock

USB 2.0 (Host)
Audio in / out combo
MicroSD
USB 3.2 Gen 1 Type-C w/ DP & PD

Docking connector

RF antenna pass-through for GPS, WLAN and WWAN

SPECIFICATIONS

Generation
G1

Operating System
Android™ 12.0

Mobile Computing Platform
Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

Graphics
Qualcomm® Adreno™ 512 GPU

Display
10.1" TFT LCD WUXGA (1920 x 1200)
>Protection film
800 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Keyboard
Power button
4 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo reader [i]

I/O Interface
8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1
Docking connector x 1
RF antenna pass-through for GPS and WWAN

Communication Interface
Wi-Fi 802.11 ac
Bluetooth (v5.0) [ii]
Dedicated GPS
4G LTE mobile broadband [vii]
Dual Micro SIM [vii]

Security Feature
Kensington lock
Optional: Smart card reader
Optional: HF RFID/NFC combo reader [i]

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery(3.84V,typical 4990mAh;min. 4870mAh)x 2
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight
275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
1.04kg (2.29lbs) [iii]

Rugged Feature
MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant

Environmental Specification
Temperature [iv]:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications
(Search, Chrome, Gmail, Maps, YouTube, Play,
Drive, YouTube music, Google TV, Duo and photos)
Getac enrollXpress

Optional software
Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories
Battery (3.84V, typical 4990mAh; min. 4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether
Hard handle

Optional:
Carry bag
Battery
(3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery
(3.84V, typical 9980mAh; min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Office dock AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 22-32VDC)
Capacitive stylus with tether
Protection film
Rubber hand strap
Vehicle dock [v]
Office dock
100W Type-C adapter
Hard handle

Bumper-to-Bumper warranty
Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard
3 anni Bumper-to-Bumper

ZX10-IP FULLY RUGGED TABLET

I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
IV. Tested by an independent third-party test lab following MIL-STD-810H.
V. Gamber Johnson and Havis vehicle docks are e-mark certified.
VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
VII. Units with 4G LTE option come with two embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Office Dock (Pogo)	
Serial Port	-
Microphone	1
Audio Output	1
DC in Jack	1
USB	USB 2.0 x 3
LAN	1
HDMI	1
RF Pass-through	-
Kensington Lock	1

Getac