


ZX10-EX FULLY RUGGED TABLET



- Certificazione ATEX / IECEx Zone 2/22 per atmosfere potenzialmente esplosive
- Processore Qualcomm® QCS6490, Octa-core
- Schermo Lumibond da 10.1" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits)
- Certificato per cadute fino a 1,8 metri, MIL-STD-810H e IP66
- Diverse configurazioni con strumenti di gestione di livello aziendale in un formato leggero

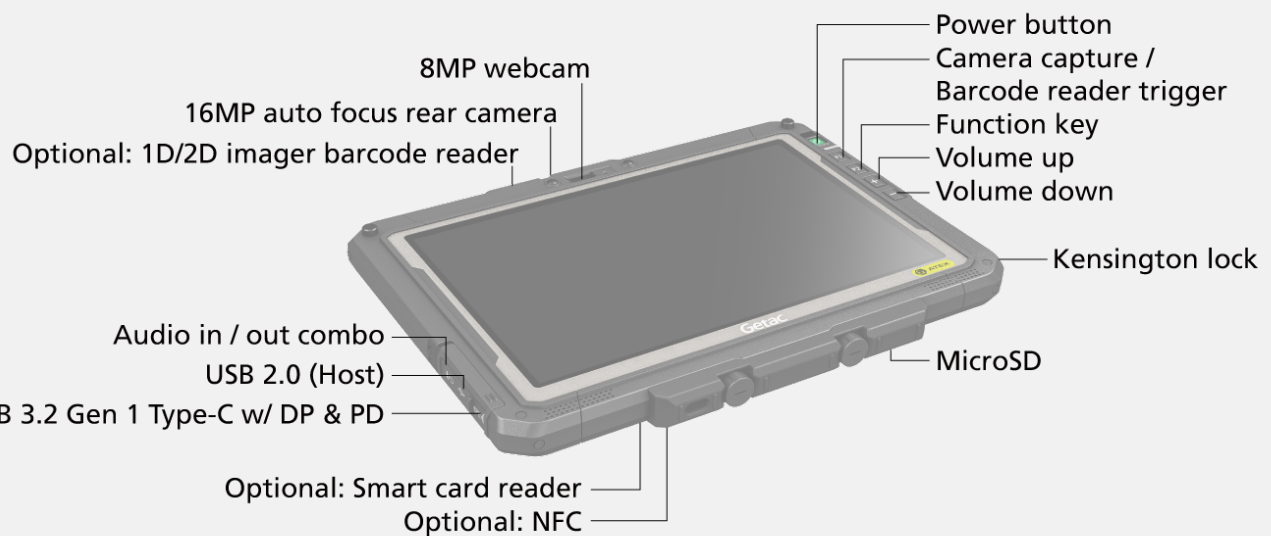

SPECIFICATIONS

Generation

G2

Operating System

Android™ 13.0

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

10.1" TFT LCD WUXGA (1920 x 1200)
Anti-static protection film
1000 nits LumiBond display with Getac sunlight
readable technology

Storage & Memory

8GB LPDDR5

128GB UFS

Optional: 256GB UFS

Device Button

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: Smart card reader
Optional: 1D/2D imager barcode reader
Optional: NFC ⁱ

I/O Interface

8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 2.0 (Host) x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
MicroSD x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF)

Communication Interface

Wi-Fi 6E 802.11ax
Bluetooth (v5.2) ⁱⁱ
Optional: 4G LTE mobile broadband ⁱⁱⁱ
Optional: 5G Sub-6 ⁱⁱⁱ
Optional: Dual SIM (Nano-SIM 4FF and e-SIM) ⁱⁱⁱ
Optional: Dedicated L1/L5 GPS ^{iv}

Security Feature

Kensington lock
Optional: Smart card reader
Optional: NFC ⁱ

Power

Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh)
+ Battery bay cover

Dimension (W x D x H) & Weight

275 x 204 x 20.05mm (10.83 " x 8.03" x 0.79")
1.05kg (2.31lbs) ^v

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant ^{vi}
ATEX & IECEx certified

Environmental Specification

Temperature ^{vii}:
- Operating: -21°C to 55°C / -5.8°F to 131°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIB T130°C Dc

Pre-installed Software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome,
Gmail, Maps, YouTube, Play, Drive, YouTube music,
Google TV, Meet and photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

Accessories

Battery (3.88V, typical 4990mAh; min. 4870mAh)

Optional:

Carry bag
Battery (3.88V, typical 4990mAh; min. 4870mAh)
High capacity battery
(3.88V, typical 9980mAh; min. 9740mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
65W USB-C AC adapter
Digitizer pen with tether
Anti-static protection film
Hard handle ^{viii}
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Rotating hand strap with kickstand

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- V. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.
- VI. Drop test results vary from configurations and optional accessories.
- VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.
- VIII. Factory option. Not user swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com | www.getac.com/it/
Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.