


ZX10 FULLY RUGGED TABLET



- Processore Qualcomm® QCS6490, Octa-core
- Schermo Lumibond da 10.1" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits) e touchscreen capacitivo, utilizzabile con i guanti
- Doppia batteria hot swap per un funzionamento ininterrotto
- Certificato per cadute fino a 1,8 metri, MIL-STD-810H e IP66
- Lettore Barcode 1D/2D Imager opzionale
- Diverse configurazioni con strumenti di gestione di livello aziendale in un formato leggero
- Verificato come Android enterprise recommended¹

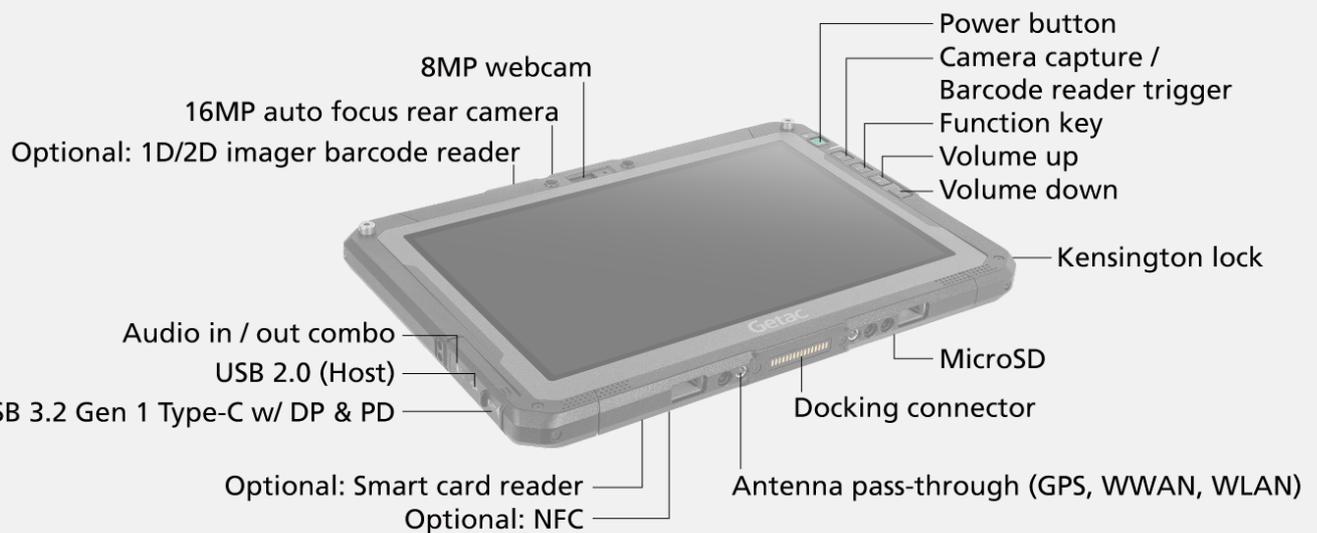

SPECIFICATIONS

Generation

G2

Operating System

Android™ 13.0¹

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

10.1" TFT LCD WUXGA (1920 x 1200)

Protection film

1,000 nits LumiBond display with Getac sunlight readable

technology

Capacitive multi-touch screen

Storage & Memory

8GB LPDDR5

128GB UFS

Optional: 256GB UFS

Device Button

Power button

4 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: Smart card reader

Optional: NFCⁱⁱ

I/O Interface

8MP webcam x 1

16MP auto focus rear camera x 1

Audio in/out combo x 1

USB 2.0 (Host) x 1

USB 3.2 Gen 1 Type-C w/ DP & PD x 1

MicroSD x 1

Docking connector x 1

Optional: SIM card slot x 1 (Nano-SIM, 4FF)

Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 6E 802.11ax

Bluetooth (v5.2)ⁱⁱⁱ

Optional: Dual SIM (Nano-SIM 4FF and e-SIM)^{iv}

Optional: 4G LTE mobile broadband^{iv}

Optional: 5G Sub-6^{iv}

Optional: Dedicated L1/L5 GPS^v

Security Feature

Kensington lock

Optional: NFCⁱⁱ

Optional: Smart card reader

Power

Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh)

+ Battery bay cover

LifeSupport battery swappable technology

Swappable Battery Options:

1. Battery (3.88V, typical 4990mAh; min. 4870mAh) x 2

2. High capacity battery

(3.88V, typical 9980mAh; min. 9740mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")

906g (1.99lbs)^{vi}

Rugged Feature

MIL-STD-810H certified

IP66 certified

Vibration & 6 feet (1.8m) drop resistant⁸

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)

Environmental Specification

Temperature^{vii}:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications (Search, Chrome,

Gmail, Maps, YouTube, Play, Drive, YouTube music,

Google TV, Meet and Photos)

Getac Log Tool

Getac Diagnostic

Getac Monitoring (trial version) agent/SDK^{ix}

Getac Management (trial version) agent/SDK^{ix}

Optional software

Getac Driving Safety Utility

Getac Monitoring^{ix}

Getac Management^{ix}

Getac OEMConfig^{ix}

Accessories

Battery (3.88V, typical 4990mAh; min. 4870mAh)

Optional:

Carry bag

High capacity battery

(3.88V, typical 9980mAh; min. 9740mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

65W USB-C AC adapter

DC-DC vehicle adapter (65W, 11-32VDC)

Capacitive stylus with tether

Digitizer pen with tether

Protection film

Hand strap

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Hard handle

Office dock

Vehicle dock^{viii}

Keyboard dock

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo

dei dispositivi e causare tempi di inattività.

Ecco perché Getac ha introdotto la copertura dei danni

accidentali come elemento standard della Garanzia totale

Bumper-to-Bumper, consentendo una migliore gestione

dei costi legati all'IT.

La Garanzia Bumper-to-Bumper è una formula agevole.

Significa affidarsi a noi per riavere la propria unità

nuovamente operativa in pochi giorni.

Standard

3 anni Garanzia Bumper-to-Bumper

ZX10 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- V. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- VI. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.
- VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.
- VIII. Gamber Johnson and Havis vehicle docks are e-mark certified.
- IX. Compatibility begins in April 2025.
- X. Drop test results vary from configurations and optional accessories.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock (Pogo)
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB 2.0 x 2	USB 2.0 x 3
LAN	-	1
HDMI	-	1
RF Pass-through	Optional: RF antenna connector x 3 (GPS, WWAN, WLAN)	-
Kensington Lock	-	Kensington Lock x 1

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.