


ZX10 FULLY RUGGED TABLET



- Processore Qualcomm® Snapdragon™ 660, Octa-core
- Schermo Lumibond da 10.1" con tecnologia Getac leggibile alla luce del sole e touchscreen capacitivo, utilizzabile con i guanti
- Doppia batteria sostituibile a caldo per un funzionamento ininterrotto
- Certificato per cadute fino a 1,8 metri (6ft), MIL-STD-810H e IP66
- Lettore Barcode 1D/2D Imager opzionale
- Verificato come Android enterprise recommended ¹



ZX10 3D demo

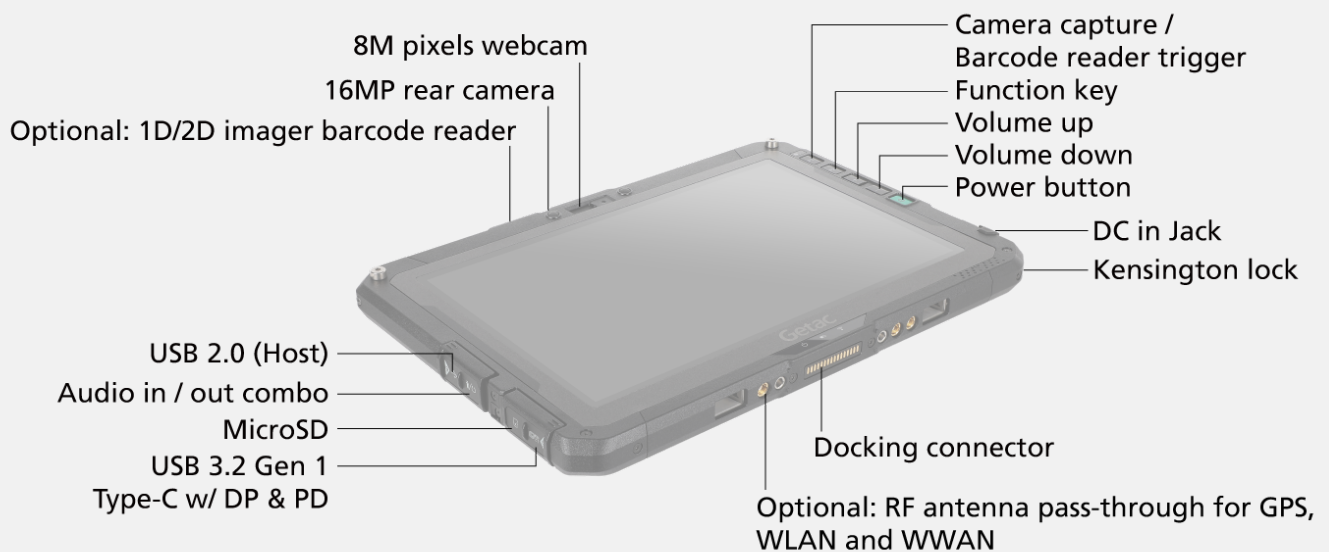

SPECIFICATIONS

Generation
G1

Operating System
Android™ 12.0ⁱ

Mobile Computing Platform
Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

VGA Controller
Qualcomm® Adreno™ 512 GPU

Display
10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
800 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Device Button
Power button
4 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo readerⁱⁱ

I/O Interface
8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1
Docking connector x 1
Optional: SIM card slot x 2 (Micro-SIM, 3FF)^{iv}
Optional: RF antenna pass-through for GPS and WWAN

Communication Interface
Wi-Fi 802.11ac
Bluetooth (v5.0)ⁱⁱⁱ
Dedicated GPS
Optional: 4G LTE mobile broadband^{iv}
Dual Micro SIM^{iv}

Security Feature
Kensington lock
Optional: Smart card reader
Optional: HF RFID/NFC combo readerⁱⁱ

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery(3.84V,typical 4990mAh;
min. 4870mAh)x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery
(3.84V, typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight
275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
1.04kg (2.29lbs)^v

Rugged Feature
MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
Optional: ANSI/UL 121.201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification
Temperature^{vi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications
(Search, Chrome, Gmail, Maps, YouTube, Play,
Drive, YouTube music, Google TV, Duo and photos)
Getac Diagnostic Tool
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

Optional software
Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

Accessories
Battery (3.84V, typical 4990mAh; min. 4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:
Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh;
min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Office dock AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 22-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Keyboard dock
Vehicle dock^{vii}
Office dock
100W Type-C adapter

Bumper-to-Bumper warranty
Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard
3 anni Bumper-to-Bumper

ZX10 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Units with 4G LTE option come with two embedded SIM card slots.
- V. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- VI. Tested by an independent third-party test lab following MIL-STD-810H.
- VII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Office Dock (Pogo)	Vehicle Dock(Havis, Gamber-Johnson)	Vehicle Dock(RAM Mounts)
Serial Port	-	-	-
Microphone	1	1	-
Audio Output	1	1	-
DC in Jack	1	1	1
USB	USB 2.0 x 3	USB 2.0 x 2	USB 2.0 x 1 or USB 2.0 x 2
LAN	1	-	-
HDMI	1	-	-
RF Pass-through	-	3 (WWAN, WLAN, GPS)	-
Kensington Lock	-	-	-



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com | www.getac.com/it/
Copyright © 2023 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.