




ZX80-EX FULLY RUGGED TABLET

- Certificazione ATEX / IECEx Zone 2/22 per zone potenzialmente esplosive
- Processore Qualcomm® QCS6490, Octa-core
- Display LumiBond da 8" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits)
- Certificato per cadute fino a 1,8 metri (6ft), MIL-STD-810H e IP67
- Diverse configurazioni con strumenti di gestione di livello aziendale in un formato sottile e leggero
- Verificato come Android enterprise recommended ¹

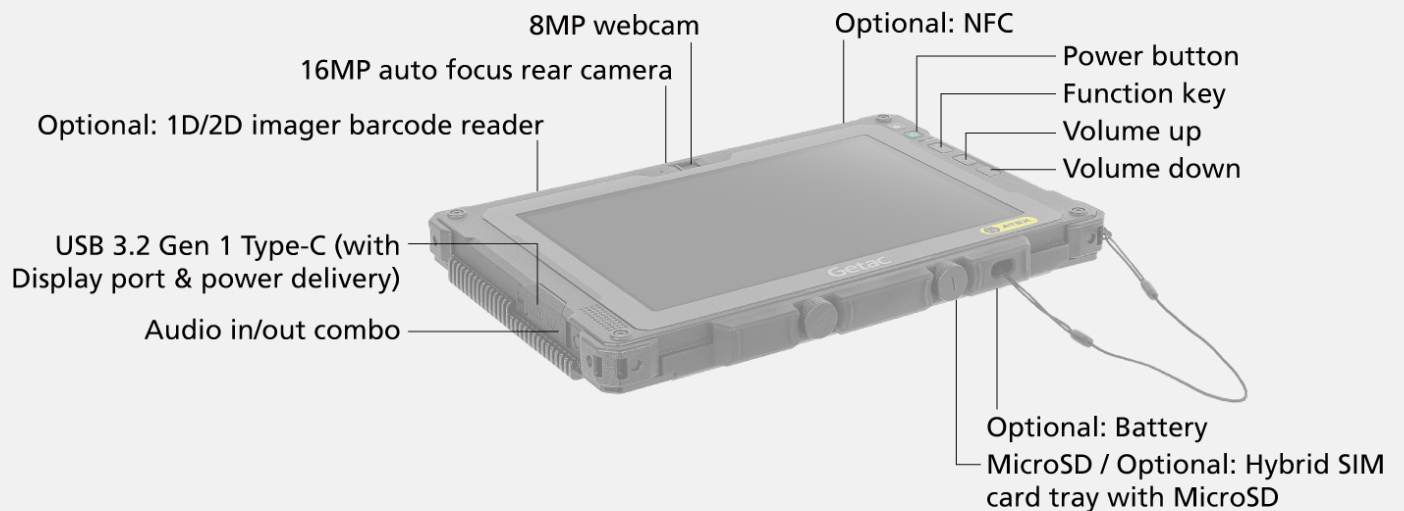

SPECIFICATIONS

Generation

G1

Operating System

Android™ 15.0ⁱ

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)

Anti-static protection film

1,000 nits LumiBond display with Getac sunlight readable

technology

Capacitive multi-touch screen

Storage & Memory

12GB LPDDR5, 256GB UFS

Keyboard

Power button

3 tablet programmable buttons

Pointing Device

Touchscreen

- Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated speaker

Integrated dual-array microphone

Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: NFCⁱⁱ

I/O Interface

8M pixels webcam x 1

16M pixels auto focus rear camera x 1

Audio in/out combo x 1

USB 3.2 Gen 1 Type-C (with Display port & power delivery) x 1

MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 2FF)

tray with MicroSD x 1ⁱⁱⁱ

Communication Interface

Wi-Fi 6E 802.11ax

Bluetooth (v5.2)^{iv}

Optional: Dual SIM (Nano-SIM 4FF and e-SIM)ⁱⁱⁱ

Optional: 4G LTE mobile broadbandⁱⁱⁱ

Optional: 5G Sub-6ⁱⁱⁱ

Optional: Dedicate GPS^v

Security Feature

Optional: NFCⁱⁱ

Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)

Battery Options:

Barttery bay cover (Default)

Battery (3.84V, typical 4990mAh; min. 4870mAh)

Dimension (W x D x H) & Weight

243.2 x 165.1 x 23.1mm (9.57" x 6.50" x 0.90")

780g (1.72lbs)^{vi}

Rugged Feature

MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant^{vii}

ATEX & IECEx certified

Environmental Specification

Temperature^{viii}:

- Operating: -21°C to 55°C / -5.8°F to 131°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T4 Gc

Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications

(Search, Chrome, Gmail, Maps, YouTube, Play,

Drive, YouTube music, Google TV, Meet and photos)

Getac Log Tool

Getac Diagnostic

Getac Monitoring (trial version) agent/SDK

Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac Management

Getac OEMConfig^{ix}

Accessories

Digitizer pen

Optional:

Battery (3.84V, typical 4990mAh; min. 4870mAh)

65W USB-C AC Adapter

65W USB-C Vehicle adapter

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

Digitizer pen with tether

Anti-static protection film

Hand strap with stylus holder

Rotating hand strap with kickstand

Shoulder strap (2-point)

Vehicle cradle

Bumper-to-Bumper warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

ZX80-EX FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2026 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.