


A140 FULLY RUGGED TABLET



- 14" FHD LumiBond display with Getac sunlight readable technology for unprecedented viewing experience
- Dual battery design with LifeSupport battery swappable technology
- Optional 1D/2D imager barcode reader
- Multi-function hard handle, hand straps and shoulder straps and slim-profile vehicle dock for maximum mobile productivity

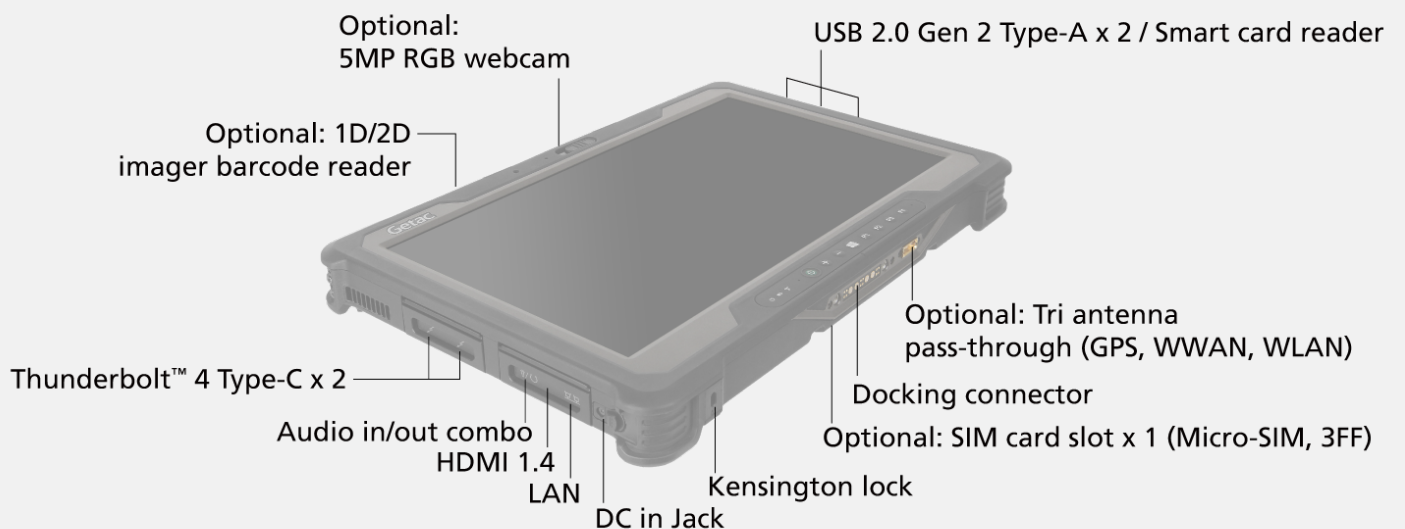

SPECIFICATIONS

Generation

G2E

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 Processor 125U Max.
4.3GHz with Intel® Turbo Boost Technology
- 12 MB Intel® Smart Cache

Graphics

Intel® UHD Graphics

Display

14" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
800 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5
Optional: 32GB DDR5

512GB PCIe NVMe SSD

Keyboard

Power button
7 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Optional: 1D/2D imager barcode reader

I/O Interface

Audio in/out combo x 1
DC in Jack x 1
USB 2.0 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 2
HDMI 1.4 x 1
LAN(RJ45) x 1
Docking connector x 1
Optional: 5MP RGB webcam x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ⁱ
Optional: RF antenna pass-through for GPS, WWAN and WLAN
Optional: 8MP auto focus rear camera x 1

Communication Interface

10/100/1000 base-T Ethernet x 1
Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.3) ⁱⁱ
Optional: Dedicated GPS ⁱⁱⁱ
Optional: 4G LTE mobile broadband ⁱ

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (10.8V,typical 3220mAh,min.3120mAh) x 2
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight

369 x 248 x 32.5mm (14.58" x 9.76" x 1.279")
2.3kg (5.07lbs) ^{iv}

Rugged Feature

MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified ^v
Vibration & 4ft (1.2m) drop resistant ^{vi}
Optional: UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{vii}

Environmental Specification

Temperature ^{viii} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{ix}
Getac Driving Safety Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^x

Accessories

Battery
(10.8V, typical 3220mAh; min. 3120mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Battery (10.8V, typical 3220mAh; min. 3120mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Rubber hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Vehicle cradle ^{xi}
Vehicle dock ^{xi}
Office dock
100W Type-C adapter
Getac rugged keyboard
Getac DS100 USB-C docking station with AC adapter

A140 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. Units with 4G LTE option comes with an embedded SIM card slot.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Supports GPS and Glonass.
- IV. Weight varies from configurations and optional accessories.
- V. MIL-STD-461 90W AC adapter sold separately.
- VI. Drop test results vary from configurations and optional accessories.
- VII. Available with limited configurations and environment conditions.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.
- IX. Available when barcode reader option is selected.
- X. Models require either embedded or standalone GPS module.
- XI. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	-
Display Port	-	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	3
LAN	1	1
HDMI 1.4	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Printer Port	-	1



Getac USA

15495 Sand Canyon Ave. Suite 350 Irvine,
CA 92618 Tel : 949-681-2900
GetacSales_US@getac.com |
www.getac.com/us/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.