




K120 FULLY RUGGED TABLET

- Processeur Intel® Core™ i5/i7 de 11e génération
- Écran tactile capacitif LumiBond® 2.0 Full HD de 12,5" " avec technologie de lecture en plein soleil Getac (1 200 nits)
- Sécurité d'entreprise améliorée avec la technologie Intel® vPro™, la caméra de reconnaissance faciale Windows Hello et de nombreuses autres options d'authentification multifacteur
- Utilisation multimode grâce à un large choix d'accessoires
- Double batterie avec technologie de remplacement à chaud LifeSupport™
- Thunderbolt™ 4 se distingue par sa très haute vitesse et ses performances inégalées



K120 3D demo

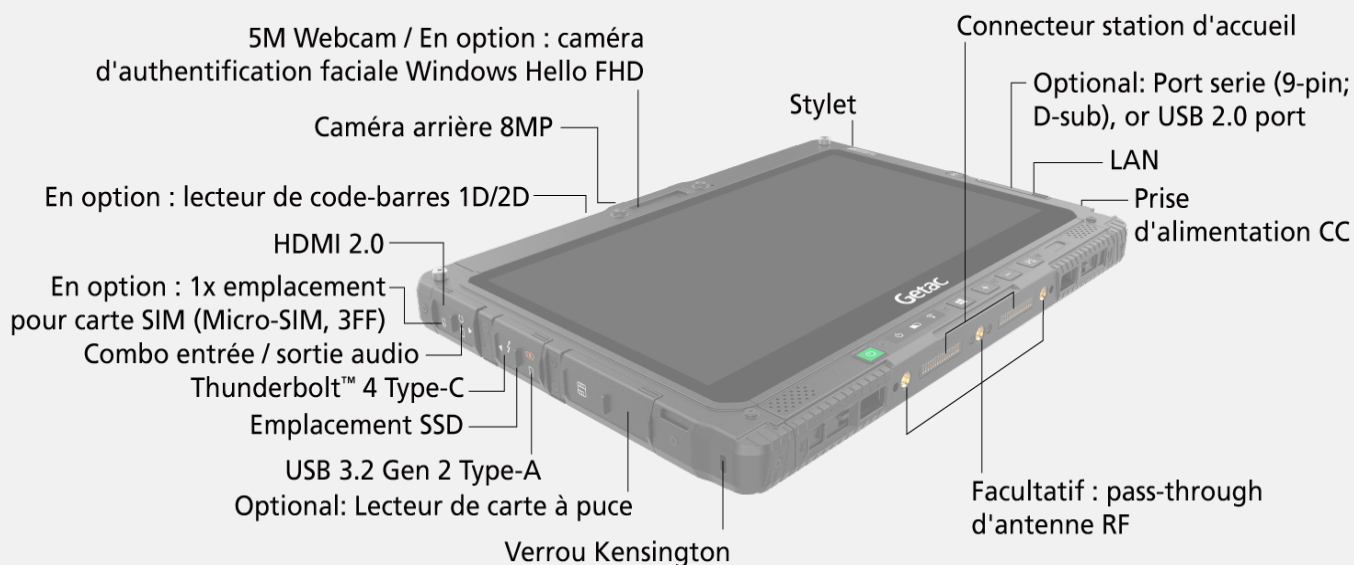

SPÉCIFICATIONS

Generation

G2-R

Système d'exploitation

Windows 11 Pro

Plateforme informatique mobile

Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Contrôleur Graphique

Intel® Iris® Xe Graphics i

Écran

12.5" Wide Viewing Angle TFT LCD FHD (1920 x 1080)

Protection film

1,200 nits LumiBond® display with Getac sunlight readable technology

Capacitive multi-touch screen

Stockage et mémoire

16GB DDR4

Optional: 32GB / 64GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Clavier

Power button

5 tablet programmable buttons

Périphérique de pointage

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Extension

Optional: 1D/2D imager barcode reader

Optional: Serial port (9-pin; D-sub), or USB 2.0 port

Tablet

FHD 5M webcam x 1 ii

8M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 1

Thunderbolt™ 4 Type-C x 1

LAN (RJ-45) x 1

HDMI 2.0 x 1

Docking connector x 2

Optional: SIM card slot x 1 (Micro-SIM, 3FF) iii

Optional: Windows Hello face-authentication

FHD camera (front-facing) x 1 ii

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 3

LAN (RJ45) x 1

HDMI 2.0 x 1

Display port 1.2 x 1

Serial port (9-pin; D-sub) x 1

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 3

LAN (RJ45) x 1

HDMI 2.0 x 1

Display port 1.2 x 1

Serial port (9-pin; D-sub) x 1

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 3

LAN (RJ45) x 1

HDMI 2.0 x 1

Display port 1.2 x 1

Serial port (9-pin; D-sub) x 1

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 3

LAN (RJ45) x 1

HDMI 2.0 x 1

Display port 1.2 x 1

Serial port (9-pin; D-sub) x 1

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 3

LAN (RJ45) x 1

HDMI 2.0 x 1

Display port 1.2 x 1

Serial port (9-pin; D-sub) x 1

Fonctionnalités de sécurité

TPM 2.0

Kensington lock

Optional: Intel® vPro® Technology

Optional: Smart card reader or HF RFID reader

vi, vii or Fingerprint reader viii

Optional: Windows Hello face-authentication

FHD camera (front-facing) ii

Alimentation

AC adapter (90W, 100-240VAC, 50/60Hz)

Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

LifeSupport™ battery swappable technology

Optional: High capacity Li-ion battery (14.4V, typical 3450mAh; min. 3300mAh) x 2

Dimensions (l x P x H) et poids

Tablet

329.5 x 238 x 24mm (12.97" x 9.37" x 0.94")

1.7kg (3.75lbs) ix

Tablet + Optional keyboard dock:

340.5 x 307.5 x 47mm (13.40" x 12.10" x 1.85")

3.13kg (6.9lbs) ix

Caractéristiques de conception renforcée

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified x

Vibration & 6ft (1.8m) drop resistant xi

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D) xii

Spécifications environnementales

Temperature xiii:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Logiciels préinstallés

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager xiv

Getac Driving Safety Utility (trial version)

Optional: Absolute Persistence®

Logiciel en option

Getac Driving Safety Utility

Getac KeyWedge Barcode Reader Utility

Getac Device Monitoring System (GDM5)

Getac VGPS Utility xv

Accessoires

Battery (11.1V, typical 2100mAh; min. 2040mAh)

AC adapter (90W, 100-240VAC)

Capacitive stylus with tether

Optional:

Carry bag

Battery (11.1V, typical 2100mAh; min. 2040mAh)

High capacity Li-ion battery (14.4V, typical 3450mAh; min. 3300mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (90W, 100-240VAC)

Office dock AC adapter (120W, 100-240VAC)

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Hard handle

Rotating hand strap with kickstand

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Detachable keyboard

Vehicle cradle xvi

Keyboard dock

Vehicle dock xvi, xvii

Office dock

Spare SSD kit

100W Type-C adapter

Getac rugged keyboard

K120 FULLY RUGGED TABLET

Garantie Bumper-to-Bumper

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses.

C'est pourquoi Getac propose de prendre en charge les dommages accidentels par sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac.

En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

i. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics. ii. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options. iii. Units with 4G LTE option comes with an embedded SIM card slot. iv. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. v. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass. vi. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). vii. LF/HF RFID reader option is not Energy Star 8.0 compliant. viii. Smart card reader, HF RFID reader and Fingerprint scanner are mutually exclusive options. ix. Weight and dimensions vary from configurations and optional accessories; optional high capacity batteries add approx. 11mm (H), 0.20kg. x. MIL-STD-461 90W AC adapter sold separately. xi. Drop test results vary from configurations and optional accessories. xii. Available with limited configurations and environment conditions. xiii. Tested by an independent third-party test lab following MIL-STD-810H. xiv. Available when barcode reader option is selected. xv. Models require either embedded or standalone GPS module. xvi. Gamber Johnson and Havis vehicle docks are e-mark certified. xvii. Available for laptop and tablet mode. xviii. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers. xix. Support GPS, GLONASS, Galileo, BeiDou and QZSS.

	Station d'accueil pour véhicule – mode Tablette	Station d'accueil pour véhicule – mode Ordinateur portable	Station d'accueil pour bureau – mode Tablette	Station d'accueil pour bureau – mode Ordinateur portable
Port série	1	1	1	1
Port VGA	1	1	1	1
Micro	-	-	1	1
Prise d'alimentation CC	-	-	1	1
Port USB	USB 2.0 x 3 USB 3.2 Gen 1 x 3	USB 2.0 x 3 USB 3.2 Gen 1 x 3	USB 2.0 x 2 USB 3.2 Gen 1 x 3	USB 2.0 x 2 USB 3.2 Gen 1 x 3
Port LAN	2	2	2	2
Port HDMI	1	1	1	1
Connecteur d'antenne RF	3 (WWAN, WLAN et GPS)	3 (WWAN, WLAN et GPS)	-	-

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12
80 60 Sales-Getac-France@getac.com |
www.getac.com/fr/ Copyright © 2023 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Les informations sont fournies
ici pour référence seulement, les spécifications
disponibles doivent faire l'objet d'un devis sur
demande.

	Station d'accueil pour véhicule – mode Tablette	Station d'accueil pour véhicule – mode Ordinateur portable	Station d'accueil pour bureau – mode Tablette	Station d'accueil pour bureau – mode Ordinateur portable
Kensington Lock	1	1	1	1