



# X500 FULLY RUGGED NOTEBOOK

- Intel® Core™ i7-7820EQ Processor
- 15.6" TFT LCD FHD with Getac QuadraClear® sunlight readable display
- Optional NVIDIA® Quadro® P2000 4GB discrete graphics controller
- Multimedia bay & PCI/PCIe 3.0 expansion unit












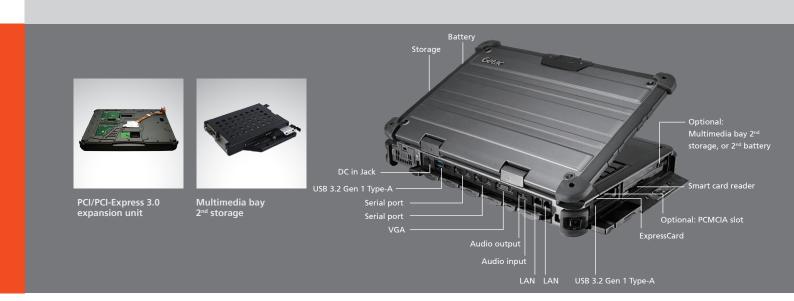

# **Specifications**

## Generation

### **Operating System**

Windows 10 Pro

#### **Mobile Computing Platform**

Intel® Core™ i5-7440EQ 2.9GHz Max. 3.6GHz - 6MB Intel® Smart Cache

Platform options: Intel® Core™ i7-7820EQ 3.0GHz Max. 3.7GHz - 8MB Intel® Smart Cache

## **VGA Controller**

Intel® HD Graphics 630 Optional: NVIDIA® GeForce® GTX1050 4GB discrete graphics controller Optional: NVIDIA® Quadro® P2000 4GB discrete graphics controller

15.6" TFT LCD FHD (1920 x 1080)

Protection film 1,000 nits QuadraClear® sunlight readable display Optional: Resistive touch screen

#### Storage & Memory

8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4 i 500GB SATA HDD / 512GB SATA SSD Optional: 1TB SATA HDD / 1TB SATA SSD

#### Keyboard

LED backlit membrane keyboard with integrated numeric keypad Optional: LED backlit rubber keyboard

#### **Pointing Device**

Touchscreen
- Optional: Pressure sensitive touchscreen

Glide touchpad with scroll bar

#### **Expansion Slot**

Smart card reader x 1 ExpressCard/54 x 1
Optional: PCMCIA Type II x 1

#### **Multimedia Bay**

DVD super multi drive Optional 2<sup>nd</sup> storage: 500GB HDD / 1TB HDD / 512GB SSD / 1TB SSD Optional 2<sup>nd</sup> battery: 10.8V, 9240mAh, 99.8Wh

## I/O Interface

Audio input (Mini-jack) x 1 Audio output (Mini-jack) x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 4 LAN (RJ45) x 2 LAN (1045) X 2 HDMI x 1 Docking connector x 1 External VGA (15-pin; D-sub) x 1 Serial port (9-pin; D-sub) x 2 Optional: FHD webcam x 1 Optional: RF antenna pass-through for GPS  $^{\rm ii},$  and WLAN

#### **Communication Interface**

10/100/1000 base-T Ethernet Intel® Dual Band Wireless-AC 8265, 802.11ac Bluetooth (v4.2) iii Optional: Dedicated GPS

## **Security Feature**

TPM 2.0 Kensington lock Intel® vPro™ Technology Smart card reader

AC adapter (150W, 100-240VAC, 50/60Hz) Li-ion smart battery (10.8V, 9240mAh, 99.8Wh) Optional: Multimedia bay 2<sup>nd</sup> Li-ion smart battery (10.8V, 9240mAh, 99.8Wh)

Dimension (W x D x H) & Weight 410 x 320 x 65mm (16.1" x 12.6" x 2.5") 5.2kg (11.4lbs)

#### **Rugged Feature**

MIL-STD-810H certified IP65 certified MIL-STD-461G certified v Vibration & drop resistant
Full magnesium alloy case
Shock-protected removable HDD
Optional: ANS/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) vi

### **Environmental Specification**

Operating: -20°C to 55°C / -4°F to 131°F Storage: -40°C to 71°C / -40°F to 160°F

Humidity:
- 95% RH, non-condensing

#### **Pre-installed Software**

Getac Utility Getac Geolocation Optional: Absolute Persistence® Accessories

Battery (10.8V, 9240mAh, 99.8Wh) AC adapter (150W, 100-240VAC)

#### Optional:

Vehicle dock

Backpack Battery (10.8V, 9240mAh, 99.8Wh) Multimedia bay 2<sup>nd</sup> HDD Multimedia bay 2<sup>nd</sup> battery (10.8V, 9240mAh, 99.8Wh) 99.8Wh)
Multi-Bay charger (Dual-Bay)
AC adapter (150W, 100-240VAC)
Office dock AC adapter (150W, 100-240VAC)
MIL-STD-461 certified AC adapter (150W,

100-240VAC) Stylus Protection film

## **Bumper-to-Bumper Warranty**

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment

PCI or PCI-Express 3.0 expansion unit (x2 slots) viii

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

5 years Bumper-to-Bumper

- Share memory size may vary by different operating system and RAM size. Optional RF antenna pass-through for GPS,
- PCI or PCI-Express expansion unit are mutually exclusive options.
- Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. Weight and dimensions vary from
- configurations and optional accessories. Depth
- including hard handle.

  MIL-STD-461G 150W AC adapter sold separately.

  PCI or PCI-Express 3.0 expansion unit is not available with ANSVUL 121201, CSA C22.2 NO. 213 configurations.
- vii Tested by an independent third-party test lab following MIL-STD-810H.
  viii PCI or PCI-Express 3.0 expansion unit is not
- compatible with vehicle dock

# Fully Rugged **Notebook**



### **Docking Solutions**

	Vehicle Dock	Office Dock
Serial Port	2	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB 2.0 x 4	USB 3.0 x 2 USB 2.0 x 2
LAN	1	1
RF Antenna Connector	3 (optional)	



### Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | en.getac.com



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved ition provided herewith is for reference only available specification shall be subjected to quotation by request. V01M07Y21UK