



## X500 SERVER FULLY RUGGED MOBILE SERVER


- Processore Intel® Xeon® E3-1505M v6
- LCD TFT 15,6" FHD con display QuadraClear® Getac leggibile alla luce del sole
- NVIDIA® Quadro® P2000 4GB discrete graphic controller opzionale
- Unità di espansione RAID opzionale con capacità di archiviazione fino a 5TB e di configurazione RAID 0,1,5



Multimedia bay  
2<sup>nd</sup> battery



Multimedia bay  
2<sup>nd</sup> storage

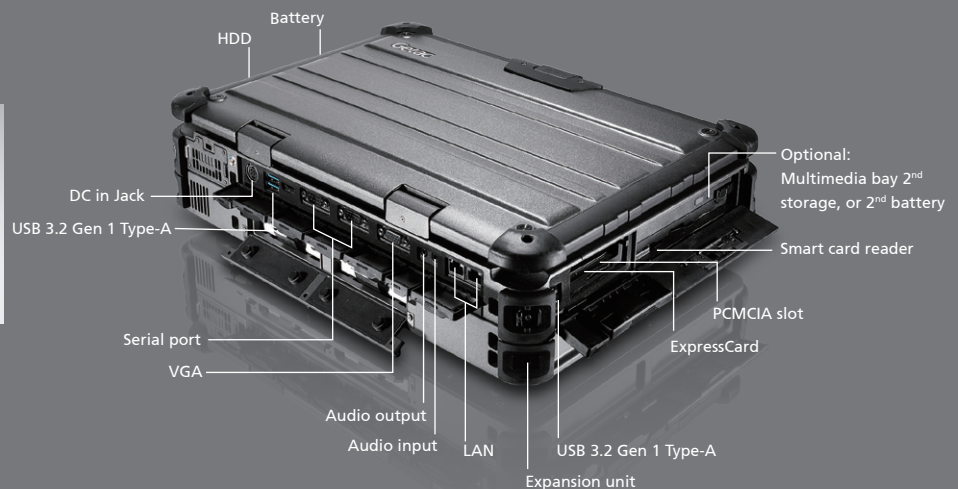

# Specifiche tecniche

## Generation

G3

## Operating System

Windows Server 2019

## Mobile Computing Platform

Intel® Xeon® Processor E3-1505M v6 3.0GHz  
Max. 4.0GHz  
- 8MB Intel® Smart Cache

## VGA Controller

Intel® HD Graphics P630  
Optional: NVIDIA® GeForce® GTX1050 4GB  
discrete graphics controller  
Optional: NVIDIA® Quadro® P2000 4GB discrete  
graphics controller

## Display

15.6" TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits QuadraClear® sunlight readable display

## Storage & Memory

32GB DDR4 / 32GB DDR4 ECC  
Optional: 64GB DDR4 / 64GB DDR4 ECC  
500GB SATA HDD / 512GB SATA SSD  
Optional: 1TB SATA HDD / 1TB SATA SSD  
Disk management: RAID 0 / RAID 1<sup>i</sup>

## Keyboard

LED backlit membrane keyboard with integrated  
numeric keypad  
Optional: LED backlit rubber keyboard

## Pointing Device

Touchpad  
- Glide touchpad with scroll bar

## Expansion Slot

Smart card reader x 1  
ExpressCard/54 x 1  
PCMCIA Type II x 1

## Multimedia Bay

2<sup>nd</sup> storage: HDD 500GB  
Optional 2<sup>nd</sup> storage: 1TB HDD / 512GB SSD / 1TB SSD  
Optional 2<sup>nd</sup> battery<sup>ii</sup>: 10.8V, 9240mAh, 99.8Wh

## X Bay

Optional: SATA HDD / SSD 3TB maximum  
expandable to 5TB  
Disk management: RAID 0, RAID 1, RAID 5

## I/O Interface

Audio input (Mini-jack) x 1  
Audio output (Mini-jack) x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-A x 4  
LAN (RJ45) x 2  
HDMI x 1  
External VGA (15-pin; D-sub) x 1  
Serial port (9-pin; D-sub) x 2

## Communication Interface

10/100/1000 base-T Ethernet  
Optional: Dedicated GPS

## Security Feature

TPM 2.0  
Kensington lock  
Intel® vPro™ Technology  
Smart card reader

## Power

AC adapter (150W, 100-240VAC, 50/60Hz)  
Li-ion smart battery (10.8V, 9240mAh, 99.8Wh)  
Optional: Multimedia bay 2<sup>nd</sup> Li-ion smart battery  
(10.8V, 9240mAh, 99.8Wh)<sup>ii</sup>

## Dimension (W x D x H) & Weight

410 x 320 x 65mm (16.1" x 12.6" x 2.5")  
5.2kg (11.4lbs)<sup>iii</sup>  
410 x 320 x 119mm (16.1" x 12.6" x 4.6")<sup>iv</sup>  
8.6kg (18.9lbs)<sup>iii,iv</sup>

## Rugged Feature

MIL-STD-810H certified  
IP65 certified  
Vibration & drop resistant  
Full magnesium alloy case  
Shock-protected removable HDD

## Environmental Specification

Temperature °C:  
- Operating: -20°C to 55°C / -4°F to 131°F  
- Storage: -40°C to 71°C / -40°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Pre-installed Software

Getac Utility  
Getac Geolocation  
Adaptec Storage Manager™<sup>ii</sup>  
Optional: Absolute Persistence®

## Accessories

Battery (10.8V, 9240mAh, 99.8Wh)  
AC adapter (150W, 100-240VAC)

## Optional:

Backpack<sup>ii</sup>  
Battery (10.8V, 9240mAh, 99.8Wh)  
Multimedia bay 2<sup>nd</sup> HDD<sup>ii</sup>  
Multimedia bay 2<sup>nd</sup> battery (10.8V, 9240mAh,  
99.8Wh)<sup>ii</sup>  
Multi-Bay charger (Dual-Bay)  
AC adapter (150W, 100-240VAC)  
Office dock AC adapter (150W, 100-240VAC)  
Protection film

## Garanzia Bumper-to-Bumper

Gli imprevisti possono compromettere l'utilizzo  
dei dispositivi e causare tempi di inattività.

Ecco perché Getac ha introdotto la copertura dei  
danni accidentali come elemento standard della  
Garanzia totale Bumper-to-Bumper, consentendo  
una migliore gestione dei costi legati all'IT.

La Garanzia totale è una formula agevole che  
garantisce un servizio di assistenza e riparazione  
rapido, effettuato da personale qualificato di  
Getac.

## Standard

5 anni Garanzia totale Bumper-to-Bumper

- i 2<sup>nd</sup> multimedia HDD is required for RAID 0,  
RAID 1 configuration.
- ii Software, hardware and accessories may vary  
depending on configuration.
- iii Weight and dimensions vary from  
configurations and optional accessories. Depth  
including hard handle.
- iv Dimension measured with expansion unit.
- v Tested by an independent third-party test lab  
following MIL-STD-810H. Recommend system  
boot-up temperature below 40°C.

# X500 SERVER

Fully Rugged  
Mobile Server



# Getac

## Getac Italy

Palazzo Cassiopea 3 - Centro Direzionale Colleoni  
Via Parcelso 26 20864 - Agrate  
Brienza (MB)

Tel : +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.  
Le informazioni riportate sono puramente indicative.  
Le specifiche disponibili sono da verificare al momento dell'offerta. V01M07Y21T