




B360 Pro FULLY RUGGED NOTEBOOK

- Certificazioni MIL-STD 810H e IP66, classificazione per cadute fino a 1,8 m e opzione resistenza alla nebbia salina
- Processore Intel® Core™ di 10ª generazione
- Display LumiBond® 2.0 FHD da 13,3" con tecnologia Getac per la leggibilità alla luce diretta del sole (1.400 nit) e touchscreen capacitivo
- NVIDIA® GeForce® GTX1050 4GB discrete graphic controller opzionale
- Sicurezza aziendale avanzata con l'opzione doppio storage sostituibile dall'utente, e le opzioni Windows Hello Face-authentication Camera, lettore barcode 1D/2D integrato e autenticazioni multi-factor
- Tecnologia di sostituzione della batteria LifeSupport™



Office dock

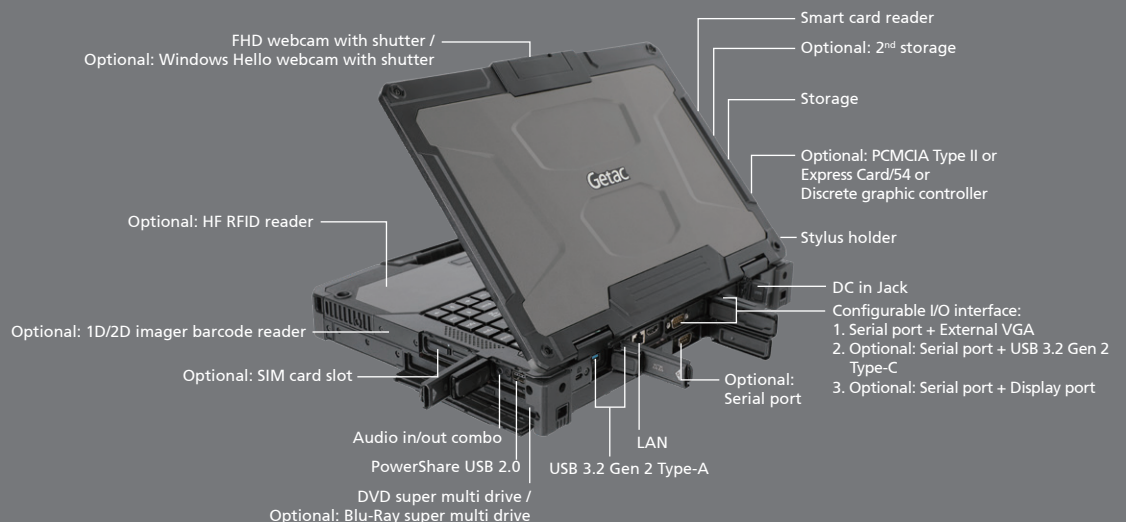

Specifiche tecniche

Generation

G1

Operating System

Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i5-10210U Processor 1.6GHz
Max. 4.2GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-10310U vPro Processor 1.7GHz
Max. 4.4GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-10610U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-10710U vPro Processor 1.1GHz
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics
Optional: NVIDIA® GeForce® GTX1050 4GB
discrete graphics controller^{i, viii}

Display

13.3" IPS TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond® display with Getac sunlight
readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4
256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD
Optional 2nd storageⁱⁱ: 256GB / 512GB / 1TB SATA SSD

Keyboard

LED backlit membrane keyboard
Optional: LED backlit rubber keyboard

Pointing Device

Touchscreen
- Capacitive multi-touch screen
Touchpad
- Glide touchpad with multi-touch

Expansion Slot

Smart card reader x 1
Optional: Discrete graphics controller, or PCMCIA
Type II, or ExpressCard/54ⁱ
Optional: 1D/2D imager barcode reader

Multimedia Bay

Optional: DVD super multi drive / Blu-Ray super
multi driveⁱⁱⁱ

I/O Interface

FHD webcam x 1
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 2.0 x 1
USB 3.2 Gen 2 Type-A x 2
LAN (RJ45) x 1
HDMI x 1
Docking connector x 1
Optional: SIM card slot x 1
Optional: Windows Hello face-authentication
camera (front-facing) x 1
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Configurable I/O options^{iv}:

Serial port (9-pin; D-sub) x 1 + External VGA
(15-pin; D-sub) x 1, or
Serial port (9-pin; D-sub) x 1 + USB 3.2 Gen 2
Type-C x 1, or
Serial port (9-pin; D-sub) x 1 + Display port x 1
Serial port (9-pin; D-sub) x 2 + External VGA
(15-pin; D-sub) x 1, or
Serial port (9-pin; D-sub) x 2 + USB 3.2 Gen 2
Type-C x 1, or
Serial port (9-pin; D-sub) x 2 + Display port x 1

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2)^v
Optional: Dedicated GPS^{vi}
Optional: 4G LTE mobile broadband with
integrated GPS^{vii}

Security Feature

TPM 2.0
Kensington lock
Optional: HF RFID reader^{viii}
Smart card reader

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz)^{viii}
High capacity battery (10.8V, typical 6900mAh;
min. 6600mAh) x 2
LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08kg (6.79lbs)^x

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^x
Vibration & 6ft (1.8m) drop resistant
e-Mark certified for vehicle usage
Optional: ANSIVUL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification

Temperature^{xi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager^{xii}
Optional: Absolute Persistence^{xiii}

Accessories

High capacity battery (10.8V, typical 6900mAh;
min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:

Backpack
High Capacity Battery (10.8V, typical 6900mAh;
min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter^{viii} (120W, 100-240VAC)
MIL-STD-461 certified AC adapter (90W,
115-230VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle dock
Office dock
Spare SSD kit
100W Type-C adapter^{xiii}

Garanzia Bumper-to-Bumper

Gli imprevisti possono compromettere l'utilizzo
dei dispositivi e causare tempi di inattività.

Ecco perché Getac ha introdotto la copertura dei
danni accidentali come elemento standard della
Garanzia totale Bumper-to-Bumper, consentendo
una migliore gestione dei costi legati all'IT.

La Garanzia totale è una formula agevole che
offre il servizio di logistica Pack & Collect e
garantisce un servizio di assistenza e riparazione
rapido, effettuato da personale qualificato di
Getac e di una riconsegna altrettanto veloce.

In questo modo il dispositivo sarà nuovamente
operativo nel giro di pochi giorni.

Standard

3 anni Garanzia totale Bumper-to-Bumper

- i Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- ii Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- iii DVD super multi drive and Blu-Ray super multi drive are mutually exclusive.
- iv External VGA, USB 3.2 Gen 2 Type-C port and Display port are mutually exclusive.
- v Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- vi Dedicated GPS is mutually exclusive with 4G LTE mobile broadband.
- vii HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- viii 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- ix Weight and dimensions vary from configurations and optional accessories.
- x MIL-STD-461G 90W AC adapter sold separately.
- xi Tested by an independent third-party test lab following MIL-STD-810H.
- xii Available when barcode reader option is selected.
- xiii Do not support the configurations with discrete graphics card.

B360 Pro

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI	1	1
RF Antenna Connector	(GPS, WWAN)	--

Getac

GETAC ITALIA

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com | www.getac.com/it/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Le informazioni riportate sono puramente indicative.
Le specifiche disponibili sono da verificare al momento dell'offerta. V01M09Y21IT