



UX10 FULLY RUGGED TABLET


- Processore Intel® Core™ di 10ª generazione
- Schermo LumiBond® 2.0 Full HD da 10,1 pollici con tecnologia Getac per la leggibilità alla luce diretta del sole (1.000 nit) e touchscreen capacitivo
- Potenziamento della sicurezza aziendale con l'optional Intel vPro, e le opzioni Windows Hello camera con autenticazione facciale e autenticazione multi-fattore
- Tastiera detachable e maniglia rigida multi-funzione per la massima flessibilità sul lavoro
- Multiple opzioni configurabili per rispondere alle diverse situazioni di utilizzo



Detachable keyboard



Hard handle

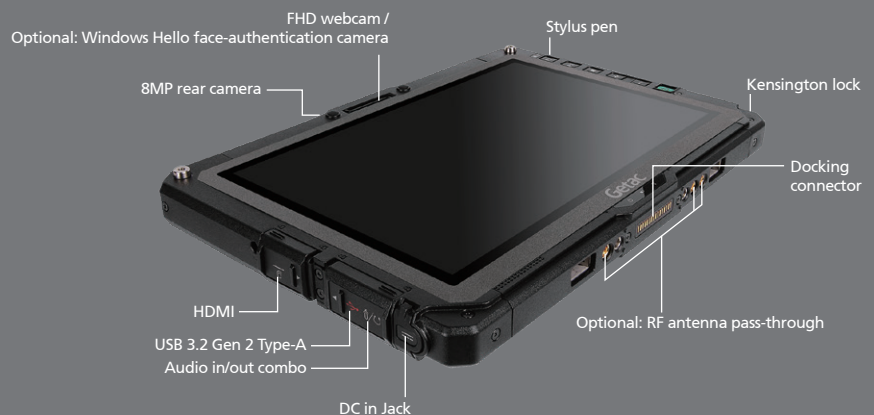

Specifiche tecniche

Generation

G2

Operating System

Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i5-10210U Processor 1.6GHz
Max. 4.2GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-10310U vPro™ Processor 1.7GHz
Max. 4.4GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-10610U vPro™ Processor 1.8GHz
Max. 4.9GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

10.1" IPS TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB DDR4
256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA portⁱ, or HF RFID readerⁱⁱ
Optional (right side): Fingerprint reader, or Serial port + LAN port (RJ45)ⁱⁱⁱ, or HF RFID readerⁱⁱ
Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader^{iv}

I/O Interface

FHD webcam x 1^v
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
HDMI x 1
Docking connector x 1
Optional: Windows Hello face-authentication camera (front-facing) x 1^v
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2)^{vi}
Optional: Dedicated GPS^{vii}
Optional: 4G LTE mobile broadband with integrated GPS^{vii}
Optional: 10/100/1000 base-T Ethernet

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro™ Technology
Optional: HF RFID readerⁱⁱⁱ
Optional: Fingerprint readerⁱⁱⁱ
Optional: Smart card reader^{iv}

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)
Li-ion smart battery (11.1V, typical 4200mAh; min. 4080mAh) x 1
Optional: High capacity battery (10.8V, 9240mAh) x 1
Optional: Bridge battery^v

Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5mm (10.89" x 7.65" x 0.92")
1.22kg (2.68lbs)^{viii}

Rugged Feature

MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified^{ix}
Vibration & 6ft (1.8m) drop resistant^x
e-Mark certified for vehicle usage
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification

Temperature^{xi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xii}
Optional: Absolute Persistence®

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Folio case
Battery (11.1V, typical 4200mAh; min. 4080mAh)
High capacity battery (10.8V, 9240 mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461G certified AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Keyboard dock
Vehicle dock
Office dock
100W Type-C adapter

Garanzia Bumper-to-Bumper

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare tempi di inattività.

Ecco perché Getac ha introdotto la copertura dei danni accidentali come elemento standard della Garanzia totale Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT.

La Garanzia totale è una formula agevole che offre il servizio di logistica Pack & Collect e garantisce un servizio di assistenza e riparazione rapido, effettuato da personale qualificato di Getac e di una riconsegna altrettanto veloce.

In questo modo il dispositivo sarà nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Garanzia totale Bumper-to-Bumper

- i 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- ii 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- iii Fingerprint scanner, HF RFID reader and Serial port + LAN port (RJ45) are mutually exclusive options.
- iv Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- v FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- vi Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- vii Supports GPS and Glonass.
- viii Weight and dimensions vary from configurations and optional accessories.
- ix MIL-STD-461 90W AC adapter sold separately.
- x Drop test results vary from configurations and optional accessories.
- xi Tested by an independent third-party test lab following MIL-STD-810H.
- xii Available when barcode reader option is selected.

UX10

Fully Rugged Tablet



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
VGA	--	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen1 x 2	USB 2.0 x 2 USB 3.2 Gen1 x 2
LAN	1	1
HDMI	--	1
RF antenna Connector	3 (WWAN, WLAN, GPS)	--
Kensington Lock	1	1

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26
Palazzo Cassiopea 3 - Centro Direzionale
Colleoni Via Paracelso 26
20864 - Agrate Brianza (MB)
Sales-getac-Italy@getac.com | www.getac.com/it



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Le informazioni riportate sono puramente indicative,
le specifiche disponibili sono da verificare al momento dell'offerta. V01M09Y21T