



# UX10 FULLY RUGGED TABLET


- 10th Generation Intel® Core™ i7 / i5 Processor
- 10.1" FHD LumiBond® 2.0 display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with optional Intel vPro, Windows Hello face-authentication camera and multi-factor authentication options
- Detachable keyboard & multi-funfctional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios



Detachable keyboard



Hard handle

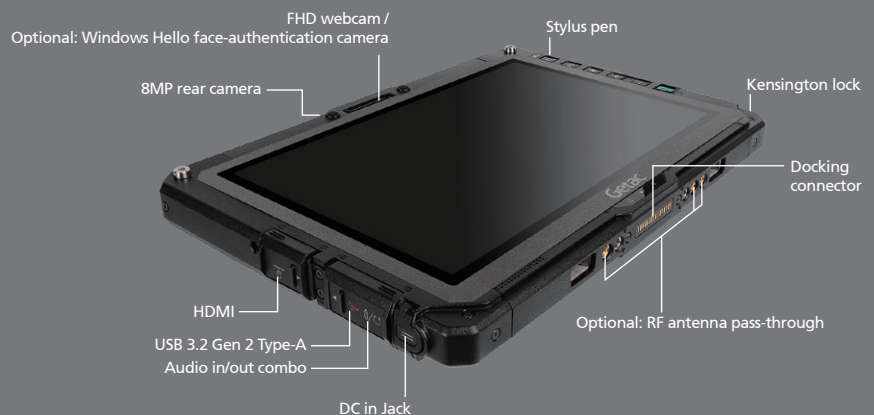

# Specifications

## Operating System

Windows 10 Pro

## Mobile Computing Platform

Intel® Core™ i5-10210U Processor 1.6GHz  
Max. 4.2GHz with Intel® Turbo Boost Technology  
- 6MB Intel® Smart Cache

## Platform options:

Intel® Core™ i5-10310U vPro™ Processor 1.7GHz  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 8MB Intel® Smart Cache

Intel® Core™ i7-10610U vPro™ Processor 1.8GHz  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 8MB Intel® Smart Cache

## VGA Controller

Intel® UHD Graphics

## Display

10.1" IPS TFT LCD WUXGA (1920 x 1200)

Protection film

1,000 nits LumiBond® display with Getac sunlight readable technology

Capacitive multi-touch screen

## Storage & Memory

8GB DDR4

Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB PCIe NVMe SSD

## Keyboard

Power button

5 tablet programmable buttons

## Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

## Expansion Slot

Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port<sup>i</sup>, or HF RFID reader<sup>ii</sup>

Optional (right side): Fingerprint reader, or Serial port + LAN port (RJ45)<sup>iii</sup>, or HF RFID reader<sup>ii</sup>

Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader<sup>iv</sup>

## I/O Interface

FHD webcam x 1<sup>v</sup>

8M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 1

HDMI x 1

Docking connector x 1

Optional: Windows Hello face-authentication camera (front-facing) x 1<sup>v</sup>

Optional: RF antenna pass-through for GPS, WWAN and WLAN

## Communication Interface

Intel® Wi-Fi 6 AX200, 802.11ax

Bluetooth (v5.2)<sup>vi</sup>

Optional: Dedicated GPS<sup>vii</sup>

Optional: 4G LTE mobile broadband with integrated GPS<sup>vii</sup>

Optional: 10/100/1000 base-T Ethernet

## Security Feature

TPM 2.0

Kensington lock

Optional: Intel® vPro™ Technology

Optional: HF RFID reader<sup>ii</sup>

Optional: Fingerprint reader<sup>iii</sup>

Optional: Smart card reader<sup>iv</sup>

## Power

AC adapter (65W, 100-240VAC, 50/60 Hz)

Li-ion smart battery (11.1V, typical 4200mAh;

min. 4080mAh) x 1

Optional: High capacity battery (10.8V, 9240mAh) x 1

Optional: Bridge battery<sup>viii</sup>

## Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5mm (10.89" x 7.65" x 0.92")

1.22kg (2.68lbs)<sup>ix</sup>

## Rugged Feature

MIL-STD-810H certified

IP65 certified

MIL-STD-461G certified<sup>x</sup>

Vibration & 6ft (1.8m) drop resistant<sup>x</sup>

e-Mark certified for vehicle usage

Optional: ANSUL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)

Optional: Salt fog certified

## Environmental Specification

Temperature<sup>xii</sup>:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

## Pre-installed Software

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager<sup>xiii</sup>

Optional: Absolute Persistence<sup>®</sup>

## Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)

AC adapter (65W, 100-240VAC)

Capacitive stylus with tether

## Optional:

Carry bag

Folio case

Battery (11.1V, typical 4200mAh; min. 4080mAh)

High capacity battery (10.8V, 9240 mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC)

Office dock AC adapter (90W, 100-240VAC)

MIL-STD-461G certified AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Hand strap

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Detachable keyboard

Keyboard dock

Vehicle dock

Office dock

100W Type-C adapter

## Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

## Standard

3 years Bumper-to-Bumper

- i 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- ii 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- iii Fingerprint scanner, HF RFID reader and Serial port + LAN port (RJ45) are mutually exclusive options.
- iv Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- v FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- vi Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- vii Supports GPS and Glonass.
- viii Weight and dimensions vary from configurations and optional accessories.
- ix MIL-STD-461 90W AC adapter sold separately.
- x Drop test results vary from configurations and optional accessories.
- xi Tested by an independent third-party test lab following MIL-STD-810H.
- xii Available when barcode reader option is selected.

# UX10

## Fully Rugged Tablet



## Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
VGA	--	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen1 x 2	USB 2.0 x 2 USB 3.2 Gen1 x 2
LAN	1	1
HDMI	--	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--
Kensington Lock	1	1

# Getac

## Getac USA

15495 Sand Canyon Ave. Suite 350

Irvine, CA 92618

Tel : 949-681-2900

GetacSales\_US@getac.com | www.getac.com/us/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request. V01M09Y21US