




V110 FULLY RUGGED NOTEBOOK

- Enhanced enterprise security with optional Intel vPro, Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- 10th Generation Intel® Core™ i7 / i5 vPro™ Processor
- 11.6" LumiBond® 2.0 display with Getac sunlight readable technology and capacitive touchscreen
- LifeSupport™ battery swappable technology
- Optional dual mode touchscreen (multi-touch and digitizer)

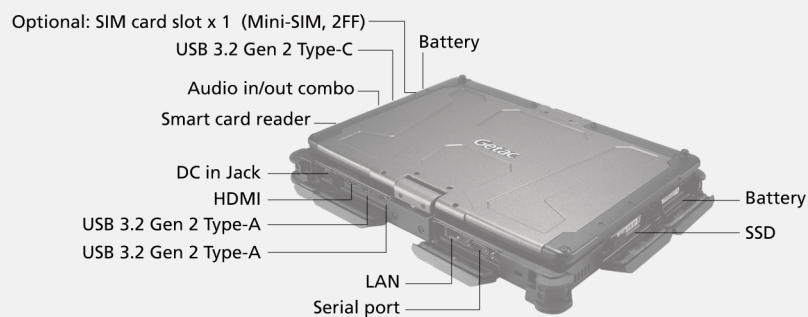

V110 FULLY RUGGED NOTEBOOK

SPECIFICATIONS

Operating System	Windows 10 Pro
Mobile Computing Platform	Intel® Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache Platform options: Intel® Core™ i5-10310U vPro™ Processor 1.7GHz Max. 4.4GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache Intel® Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache Intel® Core™ i7-10610U vPro™ Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache
VGA Controller	Intel® UHD Graphics
Display	11.6" IPS TFT LCD FHD (1920 x 1080) Protection film 800 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
Storage & Memory	8GB DDR4 Optional: 16GB / 32GB / 64GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB SSD PCIe NVMe SSD
Keyboard	LED backlit membrane keyboard Optional: Rubber keyboard Power button 5 tablet programmable buttons
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer) Touchpad - Glide touchpad with left-click and right-click buttons

V110 FULLY RUGGED NOTEBOOK

Expansion Slots	Smart card reader x 1 ⁱ Optional: 1D/2D imager barcode reader ⁱ
I/O Interface	FHD webcam x 1 ⁱⁱ Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 2 Type-C x 1 USB 3.2 Gen 2 Type-A x 2 LAN (RJ45) x 1 HDMI x 1 Serial port (9-pin; D-sub) x 1 Docking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) Optional: Windows Hello face-authentication camera (front-facing) x 1 ⁱⁱ Optional: RF antenna pass-through for GPS, WWAN and WLAN Optional: 8M pixels auto focus rear camera x 1
Communication Interface	10/100/1000 base-T Ethernet Intel® Wi-Fi 6 AX200, 802.11ax Bluetooth (v5.2) ⁱⁱⁱ Optional: Dedicated GPS Optional: 4G LTE mobile broadband ^{iv}
Security Features	TPM 2.0 Kensington lock Optional: Intel® vPro™ Technology Optional: HF RFID reader and Smart card reader ^v Optional: Fingerprint reader
Power	AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2 LifeSupport™ battery swappable technology
Dimension (W x D x H) & Weigh	313 x 238 x 39mm (12.32" x 9.37" x 1.53") 2.1kg (4.63lbs) ^{vi}
Rugged Features	MIL-STD-810H certified IP65 certified MIL-STD-461G certified ^{vii} Vibration & 4ft (1.2m) drop resistant ^{viii} e-Mark certified for vehicle usage Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) ^{ix} Optional: Salt fog certified

V110 FULLY RUGGED NOTEBOOK

Environmental Specifications

Temperature ^x:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xi}
Optional: Absolute Persistence[®]

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 certified AC adapter (90W, 115-230VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
X strap
Shoulder strap (2-point)
Vehicle cradle
Vehicle dock
Office dock
100W Type-C adapter

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. Smart card reader, Optional 1D/2D imager barcode reader are mutually exclusive options.
- II. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth

V110 FULLY RUGGED NOTEBOOK

- wireless devices that is operating in the area.
- IV. Units with 4G LTE option come with an embedded SIM card slot.
- V. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. MIL-STD-461G 90W AC adapter sold separately.
- VIII. Drop test results vary from configurations and optional accessories.
- IX. Available with limited configurations.
- X. Tested by an independent third-party test lab following MIL-STD-810H.
- XI. Available when barcode reader option is selected.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.
Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.