




## X500 SERVER FULLY RUGGED NOTEBOOK

- Intel® Xeon® Processor E3-1505M v6
- 15.6" TFT LCD FHD with Getac QuadraClear® sunlight readable display
- Optional NVIDIA® Quadro® P2000 4GB discrete graphics controller
- Optional RAID expansion unit with up to 5TB storage capacity and RAID configurable 0,1,5

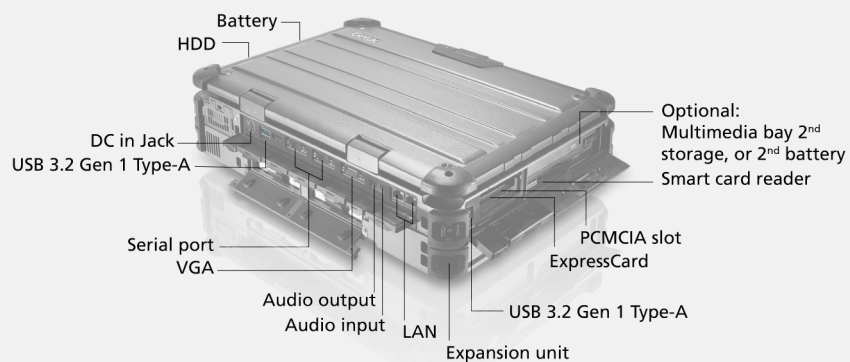

# X500 SERVER FULLY RUGGED NOTEBOOK

## SPECIFICATIONS

<b>Operating System</b>	Windows Server 2019
<b>Mobile Computing Platform</b>	Intel® Xeon® Processor E3-1505M v6 3.0GHz, Max. 4.0GHz - 8MB Intel® Smart Cache
<b>VGA Controller</b>	Intel® HD Graphics P630 NVIDIA® GeForce® GTX1050 4GB discrete graphics controller Optional: NVIDIA® Quadro® P2000 4GB discrete graphics controller
<b>Display</b>	15.6" TFT LCD FHD (1920 x 1080) Protection film 1,000 nits QuadraClear® sunlight readable display
<b>Storage &amp; Memory</b>	32GB DDR4 / 32GB DDR4 ECC Optional: 64GB DDR4 / 64GB DDR4 ECC  500GB SATA HDD / 512GB SATA SSD Optional: 1TB SATA HDD / 1TB SATA SSD  Disk management: RAID 0 / RAID 1 <sup>i</sup>
<b>Keyboard</b>	LED backlit membrane keyboard with integrated numeric keypad Optional: LED backlit rubber keyboard
<b>Pointing Device</b>	Touchpad - Glide touchpad with scroll bar
<b>Expansion Slots</b>	Smart card reader x 1 ExpressCard/54 x 1 PCMCIA Type II x 1
<b>Multimedia Bay</b>	2 <sup>nd</sup> storage: HDD 500GB Optional 2 <sup>nd</sup> storage: 1TB HDD / 512GB SSD / 1TB SSD Optional 2 <sup>nd</sup> battery <sup>ii</sup> : 10.8V, 9240mAh, 99.8Wh
<b>X Bay</b>	Optional: SATA HDD / SSD 3TB maximum expandable to 5TB Disk management: RAID 0, RAID 1, RAID 5

# X500 SERVER FULLY RUGGED NOTEBOOK

<b>I/O Interface</b>	Audio input (Mini-jack) x 1 Audio output (Mini-jack) x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 4 LAN (RJ45) x 2 HDMI x 1 External VGA (15-pin; D-sub) x 1 Serial port (9-pin; D-sub) x 2
<b>Communication Interface</b>	10/100/1000 base-T Ethernet Optional: Dedicated GPS
<b>Pre-installed Software</b>	Getac Utility Getac Geolocation Adaptec Storage Manager™ <sup>ii</sup> Optional: Absolute Persistence®
<b>Security Features</b>	TPM 2.0 Kensington lock Intel® vPro™ Technology Smart card reader
<b>Power</b>	AC adapter (150W, 100-240VAC, 50/60Hz) Li-ion smart battery (10.8V, 9240mAh, 99.8Wh) Optional: Multimedia bay 2 <sup>nd</sup> Li-ion smart battery (10.8V, 9240mAh, 99.8Wh) <sup>ii</sup>
<b>Dimension (W x D x H) &amp; Weight</b>	410 x 320 x 65mm (16.1" x 12.6" x 2.5") 5.2kg (11.4lbs) <sup>iii</sup>  410 x 320 x 119mm (16.1" x 12.6" x 4.6") <sup>iv</sup> 8.6kg (18.9lbs) <sup>iii,iv</sup>
<b>Rugged Features</b>	MIL-STD-810H certified IP65 certified Vibration & drop resistant Full magnesium alloy case Shock-protected removable HDD
<b>Environmental Specifications</b>	Temperature <sup>v</sup> : - Operating: -20°C to 55°C / -4°F to 131°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing

# X500 SERVER FULLY RUGGED NOTEBOOK

## Accessories

Battery (10.8V, 9240mAh, 99.8Wh)  
AC adapter (150W, 100-240VAC)

### Optional:

Backpack <sup>ii</sup>  
Battery (10.8V, 9240mAh, 99.8Wh)  
Multimedia bay 2<sup>nd</sup> HDD <sup>ii</sup>  
Multimedia bay 2<sup>nd</sup> battery (10.8V, 9240mAh, 99.8Wh) <sup>ii</sup>  
Multi-Bay charger (Dual-Bay)  
AC adapter (150W, 100-240VAC)  
Office dock AC adapter (150W, 100-240VAC)  
Protection film

## Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

5 years Bumper-to-Bumper

- I. 2<sup>nd</sup> multimedia HDD is required for RAID 0, RAID 1 configuration.
- II. Software, hardware and accessories may vary depending on configuration.
- III. Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.
- IV. Dimension measured with expansion unit.
- V. Tested by an independent third-party test lab following MIL-STD-810H. Recommend system boot-up temperature below 40°C.
- VI. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

## GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,  
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.  
Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.