




## ZX70-EX FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended<sup>1</sup>
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader
- ATEX & IECEx explosive atmosphere certified

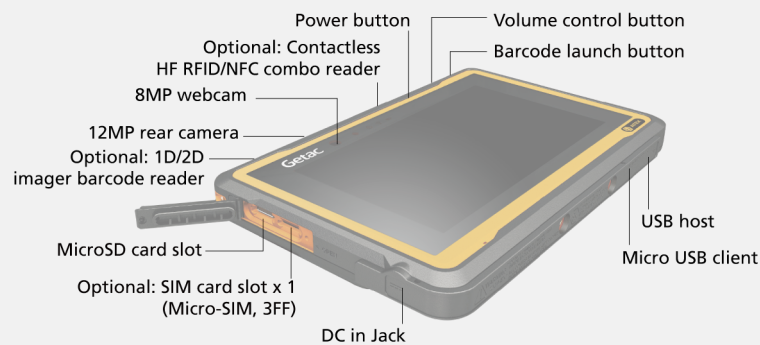

# ZX70-EX FULLY RUGGED TABLET

## SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| <b>Operating System</b>          | Android™ 10.0   |
| <b>Mobile Computing Platform</b> | Qualcomm® Snapdragon™ 660, Octa-core 1.95GHz<br>Max. 2.2GHz   |
| <b>VGA Controller</b>            | Qualcomm® Adreno™ 512 GPU   |
| <b>Display</b>                   | 7" IPS TFT LCD HD (1280 x 720)<br>Anti-static protection film<br>LumiBond® display with Getac sunlight readable technology<br>Capacitive multi-touch screen                                       |
| <b>Storage &amp; Memory</b>      | 4GB LPDDR4<br>64GB eMMC   |
| <b>Keyboard</b>                  | Power button<br>3 tablet programmable buttons   |
| <b>Pointing Device</b>           | Touchscreen<br>- Capacitive multi-touch screen  |
| <b>Expansion Slot</b>            | Optional: 1D/2D imager barcode reader   |
| <b>I/O Interface</b>             | 8M pixels webcam x 1<br>12M pixels auto focus rear camera x 1<br>DC in Jack x 1<br>USB 2.0 (Host) x 1<br>MicroUSB 2.0 (Client) x 1<br>MicroSD x 1<br>Optional: SIM card slot x 1 (Micro-SIM, 3FF) |
| <b>Communication Interface</b>   | Wi-Fi 802.11ac<br>Bluetooth (v5.0) <sup>ii</sup><br>Dedicated GPS<br>Optional 4G LTE mobile broadband <sup>iii</sup>  |

# ZX70-EX FULLY RUGGED TABLET

|   |   |
|---|---|
| <b>Pre-installed Software</b>             | Getac File Browser<br>Getac Camera<br>Getac Input Method<br>DeployeXpress Client<br>Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, Play music, Play movies, Duo and photos)   |
| <b>Security Features</b>                  | Optional: HF RFID/NFC combo reader <sup>iv, v</sup>   |
| <b>Power</b>                              | AC adapter (25W, 100-240VAC, 50/60Hz)<br>Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)   |
| <b>Dimension (W x D x H) &amp; Weight</b> | 218 x 142 x 27mm (8.58 " x 5.6" x 1.08")<br>774g (1.71lbs) <sup>vi</sup>  |
| <b>Rugged Features</b>                    | MIL-STD-810H certified<br>IP67 certified<br>Vibration & 6ft (1.8m) drop resistant <sup>vii</sup><br>ATEX & IECEx certified  |
| <b>Environmental Specifications</b>       | Temperature <sup>viii</sup> :<br>- Operating: -21°C to 60°C / -6°F to 140°F<br>- Storage: -40°C to 71°C / -40°F to 160°F<br><br>Humidity :<br>- 95% RH, non-condensing  |
| <b>Explosion Protection</b>               | ATEX/IECEx Zone 2/22<br>Ex II 3G Ex ic op is IIC T5 Gc<br>Ex II 3D Ex ic op is IIIB T100°C Dc   |
| <b>Accessories</b>                        | AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)<br>Capacitive stylus with tether<br>Pen holder<br>Wrist strap<br><br><b>Optional:</b><br>AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)<br>Capacitive stylus with tether<br>Hand strap with stylus holder<br>Wrist strap |

# ZX70-EX FULLY RUGGED TABLET

## Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

## Standard

3 years Bumper-to-Bumper

- 
- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
  - II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
  - III. Units with 4G LTE option comes with an embedded SIM card slot.
  - IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
  - V. HF RFID/NFC combo reader applies to US & EU.
  - VI. Weight and dimensions vary from configurations and optional accessories.
  - VII. Drop test results vary from configurations and optional accessories.
  - VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

## GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,  
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.  
Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.