




## T800-EX FULLY RUGGED TABLET

- 8.1" HD LumiBond® display for better viewing experience
- MIL-STD-810H and IP65 certified
- Enhanced enterprise security with TPM2.0, Windows disk encryption

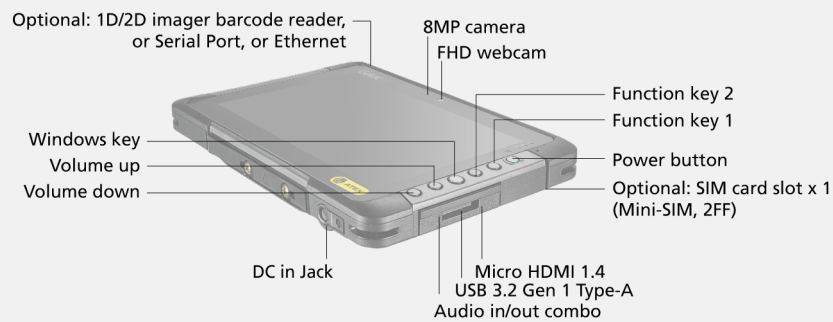

# T800-EX FULLY RUGGED TABLET

## SPECIFICATIONS

<b>Generation</b>	G2
<b>Operating System</b>	Windows 10 Pro
<b>Mobile Computing Platform</b>	Intel® Atom Processor x7-Z8750 1.6GHz, burst up to 2.56GHz - 2MB Cache
<b>VGA Controller</b>	Intel® HD Graphics
<b>Display</b>	8.1" IPS TFT LCD WXGA (1280 x 800) Protection film 600 nits LumiBond® display with Getac sunlight readable technology
<b>Storage &amp; Memory</b>	4GB LPDDR3 Optional: 8GB LPDDR3 128GB eMMC Optional: 256GB eMMC
<b>Keyboard</b>	Power button 5 tablet programmable buttons
<b>Pointing Device</b>	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)
<b>Expansion Slots</b>	Optional: SnapBack add-on: 2 <sup>nd</sup> expanded battery Optional: 1D/2D imager barcode reader x 1
<b>I/O Interface</b>	FHD webcam x 1 8M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 1 Micro HDMI 1.4 x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF)

# T800-EX FULLY RUGGED TABLET

<b>Communication Interface</b>	Intel® Wi-Fi 6 AX200, 802.11ax Bluetooth (v5.2) <sup>i</sup> Optional: Dedicated GPS Optional: 4G LTE mobile broadband <sup>ii</sup>
<b>Security Features</b>	TPM 2.0
<b>Power</b>	AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh)
<b>Dimension (W x D x H) &amp; Weight</b>	227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.91kg (2lbs) <sup>iii</sup>
<b>Rugged Features</b>	MIL-STD-810G certified IP65 certified Vibration & 6ft (1.8m) drop resistant <sup>iv</sup> ATEX & IECEx certified
<b>Environmental Specifications</b>	Temperature <sup>v</sup> : - Operating: -21°C to 50°C / -6°F to 122°F - Storage: -51°C to 71°C / -60°F to 160°F Humidity: - 95% RH, non-condensing
<b>Explosion Protection</b>	ATEX/IECEx Zone 2/22 Ex II 3G Ex ic op is IIC T4 Gc Ex II 3D Ex ic op is IIIB T130°C Dc
<b>Pre-installed software</b>	Getac Utility Getac Camera Getac Barcode Manager <sup>vi</sup> Optional: Absolute Persistence®
<b>Optional software</b>	Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility <sup>vii</sup>

# T800-EX FULLY RUGGED TABLET

## Accessories

Battery (7.4V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

### Optional:

Battery (7.4V, typical 4200mAh; min. 4080mAh)  
2<sup>nd</sup> expanded battery (14.4V, 2100mAh)  
AC adapter (65W, 100-240VAC)  
Digitizer pen  
Capacitive stylus with tether  
Protection film  
Shoulder strap (2-point)

---

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

- 
- I. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
  - II. Units with 4G LTE option come with an embedded SIM card slot.
  - III. Weight and dimensions vary from configurations and optional accessories.
  - IV. Drop test results vary from configurations and optional accessories.
  - V. Tested by an independent third-party test lab following MIL-STD-810H.
  - VI. Available when barcode reader option is selected.
  - VII. Models require either embedded or standalone GPS module.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

## GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,  
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)  
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Le informazioni riportate sono puramente indicative,

Le specifiche disponibili sono da verificare al momento dell'offerta.