





- 10th Generation Intel® Core™ i7 / i5 Processor
- 10.1" FHD LumiBond® display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with optional Intel vPro, Windows Hello face-authentication camera and multi-factor authentication options
- Detachable keyboard & multi-funtional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios












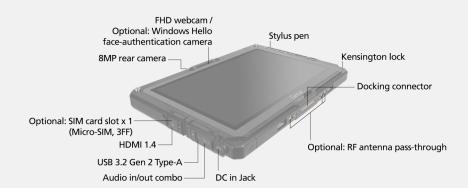

SPECIFICATIONS

Generation	G2
Operating System	Windows 10 Pro Windows 11 Pro
Mobile Computing Platform	Intel® Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache
	Platform options: Intel® Core™ i5-10310U, vPro Processor 1.7GHz Max. 4.4GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache
	Intel® Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache
	Intel® Core™ i7-10610U vPro Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache
VGA Controller	Intel® UHD Graphics
VGA Controller Display	Intel® UHD Graphics 10.1" IPS TFT LCD WUXGA (1920 x 1200) Protection film 1,000 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
	10.1" IPS TFT LCD WUXGA (1920 x 1200) Protection film 1,000 nits LumiBond® display with Getac sunlight readable technology
Display	10.1" IPS TFT LCD WUXGA (1920 x 1200) Protection film 1,000 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen 8GB DDR4 Optional 16GB/32GB DDR4 256GB PCIe NVMe SSD

Expansion Slots Optional (top side): 1D/2D imager barcode reader, or Serial

port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port i, or HF RFID reader ⁱⁱ Optional (right side): Fingerprint reader, or Serial port + LAN

port (RJ-45) iii, or HF RFID reader "

Optional (back side): Smart card reader, or Bridge battery, or

Bridge battery + Smart card reader iv

I/O Interface FHD webcam x 1 ^v

8M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 1

HDMI 1.4 x 1

Docking connector x 1

Optional: SIM card slot x 1 (Micro-SIM, 3FF)

Optional: Windows Hello face-authentication camera (front-

facing) x 1 °

Optional: RF antenna pass-through for GPS, WWAN and

WLAN

Communication Interface Intel® Wi-Fi 6 AX200, 802.11ax

Bluetooth (v5.1) vi

Optional: Dedicated GPS vii

Optional: 4G LTE mobile broadband with integrated GPS vii,viii

Optional: 10/100/1000 base-T Ethernet

Security Features TPM 2.0

Kensington lock

Optional: Intel® vPro™ Technology

Optional: HF RFID reader ⁱⁱ
Optional: Fingerprint reader ⁱⁱⁱ
Optional: Smart card reader ^{iv}

Power AC adapter (65W, 100-240VAC, 50/60 Hz)

Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1 Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1

Optional: Bridge battery iv

Dimension (W x D x H) & Weigh 276.8 x 194.5 x 23.5 mm (10.89 \(\text{x} \) 7.65 \(\text{x} \) 0.92 \(\text{D} \)

1.22kg (2.68lbs) ix

Rugged Feature MIL-STD-810H certified

IP65 certified

MIL-STD-461G certified *

Vibration & 6ft (1.8m) drop resistant xi

Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division

2, Groups A, B, C, D) xvi
Optional: Salt fog certified

Environmental Specification

Temperature xii:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed software

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager xiii

Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility

Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS)

Getac VGPS Utility xiv

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)

AC adapter (65W, 100-240VAC) Capacitive stylus with tether

Optional:

Carry bag

Folio case

Battery (11.1V, typical 4200mAh; min. 4080mAh)

High capacity Li-ion battery (10.8V, 9240 mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC)

Office dock AC adapter (90W, 100-240VAC) MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Hand strap

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Detachable keyboard

Vehicle cradle xv

Keyboard dock

Vehicle dock xv

Office dock

100W Type-C adapter

Getac rugged keyboard

Bumper-toBumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- II. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Fingerprint scanner, HF RFID reader and Serial port + LAN port (RJ45) are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Supports GPS and Glonass.
- VIII. Units with 4G LTE option come with an embedded SIM card slot.
- IX. Weight and dimensions vary from configurations and optional accessories.
- X. MIL-STD-461 90W AC adapter sold separately.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Available with limited configurations and environment conditions.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	-	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	1	1



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com I www.getac.com/it/
Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Le informazioni riportate sono puramente indicative,
Le specifiche disponibili sono da verificare al momento dell'offerta.

