




X500 SERVER FULLY RUGGED NOTEBOOK

- Intel® Xeon® Processor E3-1505M v6
- 15.6" TFT LCD FHD with Getac QuadraClear® sunlight readable display
- Optional NVIDIA® Quadro® P2000 4GB discrete graphics controller
- Optional RAID expansion unit with up to 5TB storage capacity and RAID configurable 0,1,5

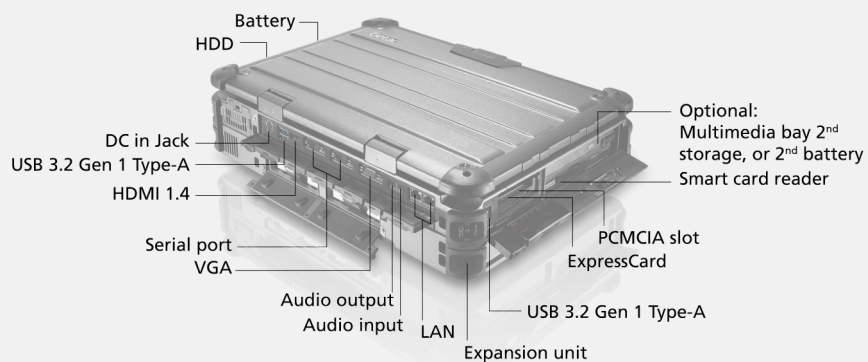

X500 SERVER FULLY RUGGED NOTEBOOK

SPECIFICATIONS

Generation	G3
Operating System	Windows Server 2019
Mobile Computing Platform	Intel® Xeon® Processor E3-1505M v6 3.0GHz, Max. 4.0GHz - 8MB Intel® Smart Cache
VGA Controller	Intel® HD Graphics P630 NVIDIA® GeForce® GTX1050 4GB discrete graphics controller Optional: NVIDIA® Quadro® P2000 4GB discrete graphics controller
Display	15.6" TFT LCD FHD (1920 x 1080) Protection film 1,000 nits QuadraClear® sunlight readable display
Storage & Memory	32GB DDR4 / 32GB DDR4 ECC Optional: 64GB DDR4 / 64GB DDR4 ECC 500GB SATA HDD / 512GB SATA SSD Optional: 1TB SATA HDD / 1TB SATA SSD Disk management: RAID 0 / RAID 1 ⁱ
Keyboard	LED backlit membrane keyboard with integrated numeric keypad Optional: LED backlit rubber keyboard
Pointing Device	Touchpad - Touchpad with two buttons
Expansion Slots	Smart card reader x 1 ExpressCard/54 x 1 PCMCIA Type II x 1
Multimedia Bay	2 nd storage: HDD 500GB Optional 2 nd storage: 1TB HDD / 512GB SSD / 1TB SSD Optional 2 nd battery ⁱⁱ : 10.8V, 9240mAh, 99.8Wh

X500 SERVER FULLY RUGGED NOTEBOOK

X Bay	Optional: SATA HDD / SSD 3TB maximum expandable to 5TB Disk management: RAID 0, RAID 1, RAID 5
I/O Interface	Audio input (Mini-jack) x 1 Audio output (Mini-jack) x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 4 LAN (RJ45) x 2 HDMI 1.4 x 1 External VGA (15-pin; D-sub) x 1 Serial port (9-pin; D-sub) x 2
Communication Interface	10/100/1000 base-T Ethernet Optional: Dedicated GPS
Security Features	TPM 2.0 Kensington lock Intel® vPro™ Technology Smart card reader
Power	AC adapter (150W, 100-240VAC, 50/60Hz) Li-ion battery (10.8V, 9240mAh, 99.8Wh) Optional: Multimedia bay 2 nd Li-ion battery (10.8V, 9240mAh, 99.8Wh) ⁱⁱ
Dimension (W x D x H) & Weight	410 x 320 x 65mm (16.1" x 12.6" x 2.5") 5.2kg (11.4lbs) ⁱⁱⁱ 410 x 320 x 119mm (16.1" x 12.6" x 4.6") ^{iv} 8.6kg (18.9lbs) ^{iii,iv}
Rugged Features	MIL-STD-810H certified IP65 certified Vibration & drop resistant Full magnesium alloy case Shock-protected removable HDD
Environmental Specifications	Temperature ^v : - Operating ^{vi} : -20°C to 55°C / -4°F to 131°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing
Pre-installed Software	Getac Utility Getac Geolocation Adaptec Storage Manager™ ⁱⁱ Optional: Absolute Persistence®

X500 SERVER FULLY RUGGED NOTEBOOK

Accessories

Battery (10.8V, 9240mAh, 99.8Wh)
AC adapter (150W, 100-240VAC)

Optional:

Backpack ⁱⁱ
Battery (10.8V, 9240mAh, 99.8Wh)
Multimedia bay 2nd Storage ⁱⁱ
Multimedia bay 2nd battery (10.8V, 9240mAh, 99.8Wh) ⁱⁱ
Multi-Bay charger (Dual-Bay)
AC adapter (150W, 100-240VAC)
Office dock AC adapter (150W, 100-240VAC)
Protection film
Spare SSD kit

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

5 years Bumper-to-Bumper

- I. 2nd multimedia HDD is required for RAID 0, RAID 1 configuration.
- II. Software, hardware and accessories may vary depending on configuration.
- III. Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.
- IV. Dimension measured with expansion unit.
- V. Tested by an independent third-party test lab following MIL-STD-810H. Recommend system boot-up temperature below 40°C.
- VI. For X500 RAID expansion unit, the operating temperature is -20°C to 45°C / -4°F to 113°F.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Le informazioni riportate sono puramente indicative,

Le specifiche disponibili sono da verificare al momento dell'offerta.