




X600 PRO FULLY RUGGED NOTEBOOK

- Processore Intel® Core™ i9 / i7 / i5 vPro™ di 11ª generazione
- Schermo da 15,6" FHD LumiBond® con tecnologia Getac leggibile alla luce del sole (1.000 nits) e touchscreen capacitivo opzionale
- Caratteristiche di sicurezza aziendale migliorate con TPM 2.0, blocco Kensington, triplo storage sostituibile dall'utente e lettore di smart card
- Connettività I/O versatile che include Thunderbolt™ 4 e soluzioni docking
- Grafica discreta opzionale NVIDIA® Quadro® RTX3000
- Moduli espandibili per porte aggiuntive, batterie, DVD super multi drive e connettività

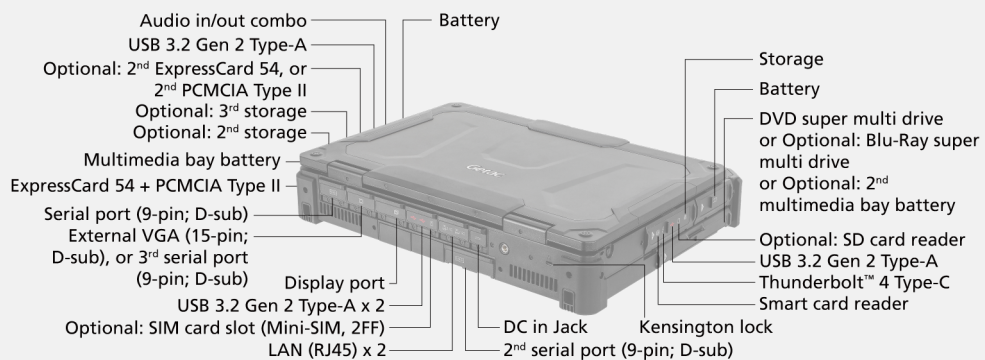

X600 PRO FULLY RUGGED NOTEBOOK

SPECIFICATIONS

Generation	G1
Operating System	Windows 11 Pro
Mobile Computing Platform	Intel® Core™ i5-11500H vPro™ Processor Max. 4.6GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache Platform options: Intel® Core™ i7-11850H vPro™ Processor Max. 4.8GHz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache Intel® Core™ i9-11950H vPro™ Processor Max. 4.9GHz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache
VGA Controller	Intel® UHD Graphics Optional: NVIDIA® Quadro® RTX3000 6GB discrete graphics controller ⁱ
Display	15.6" TFT LCD FHD (1920 x 1080) Protection film 1,000 nits LumiBond® display with Getac sunlight readable technology Optional: Capacitive multi-touch screen
Storage & Memory	16GB DDR4 Optional: 32GB / 64GB DDR4 512GB PCIe SSD Optional: 1TB PCIe SSD Optional: 2nd Storage: 512GB / 1TB PCIe SSD Optional: 3rd Storage: 512GB / 1TB PCIe SSD
Keyboard	LED backlit membrane keyboard with integrated numeric keypad
Pointing Device	Touchscreen - Optional: Capacitive multi-touch screen Touchpad - Touchpad with two buttons

X600 PRO FULLY RUGGED NOTEBOOK

Expansion Slot	Smart card reader ExpressCard 54 + PCMCIA Type II Optional: 2nd ExpressCard 54 or 2nd PCMCIA Type II ⁱⁱ Optional: SD card reader
Multimedia Bay	Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) DVD super multi drive ⁱⁱⁱ Optional: Multimedia bay 2nd battery (11.1V, typical 4200mAh; min. 3980mAh) or Blu-Ray super multi drive ⁱⁱⁱ
I/O Interface	FHD webcam x 1 Thunderbolt™ 4 x 1 USB 3.2 Gen 2 Type-A x 4 LAN (RJ-45) x 2 Audio in/out combo x 1 DC in Jack x 1 HDMI 2.0 x 1 Display port x 1 Docking connector x 1 Serial port (9-pin; D-sub) x 2 External VGA (15-pin; D-sub) x 1 or 3rd Serial port (9-pin; D-sub) x 1 ^{iv} Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^v Optional: RF antenna pass-through for GPS, WWAN and WLAN x 1
Communication	2.5GBASE-T Ethernet Intel® Wi-Fi 6E AX210, 802.11ax Bluetooth (v5.2) ^{vi} Optional: Dedicated GPS ^{vii} Optional: 4G LTE mobile broadband with integrated GPS ^{v, vii}
Security Feature	TPM 2.0 Kensington lock Smart card reader Intel® vPro™ Technology
Power	AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2 Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) x 1 Optional: Multimedia bay 2nd battery (11.1V, typical 4200mAh; min. 3980mAh) ⁱⁱⁱ
Dimension (W x D x H) & Weight	412 x 322 x 77.4mm (16.22" x 12.68" x 3.05") ^{viii} 6.05kg (13.34lbs) ^{viii}

X600 PRO FULLY RUGGED NOTEBOOK

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{ix}
Vibration and 4ft (1.2m) drop resistant
Optional: Salt fog resistant

Environmental Specification

Temperature ^x:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Optional: Absolute Persistence[®]

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) x 1
AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ
Capacitive stylus with tether

Optional:

Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh)
AC adapter (230W, 100-240VAC, 50/60Hz) ⁱ
Multi-Bay charger (Dual-Bay)
Multimedia bay DVD super multi drive ⁱⁱⁱ
Multimedia bay Blu-Ray super multi drive ⁱⁱⁱ
Capacitive stylus with tether
Protection film
Carry bag
Spare SSD kit
MIL-STD-461 AC adapter (230W, 100-240VAC) ^{ix}
DC-DC vehicle adapter (230W, 11-32VDC)
Vehicle dock
Office dock

Bumper-to-Bumper Warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come elemento standard della Garanzia totale Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. La Garanzia totale è una formula agevole, in questo modo il dispositivo sarà nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Garanzia totale Bumper-to-Bumper

X600 PRO FULLY RUGGED NOTEBOOK

- I. The configuration with a discrete graphic controller requires the 230W AC adapter.
- II. The 2nd ExpressCard 54 and the 2nd PCMCIA Type II card readers are mutually exclusive.
- III. DVD super multi drive, Blu-Ray super multi drive, and the 2nd multimedia bay battery are mutually exclusive.
- IV. The 3rd Serial port is optional and mutually exclusive with External VGA.
- V. Units with 4G LTE option comes with an embedded SIM card slot.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Dedicated GPS and 4G LTE are mutually exclusive options.
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 230W AC adapter sold separately.
- X. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Office Dock	Vehicle Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	-
Audio Output	1	-
DC in Jack	1	1
USB	5	6
LAN	2	2
HDMI	1	1
Display port	1	1
RF Antenna Connector	-	1 (GPS, WWAN, WLAN)
Kensington lock	1	1

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Le informazioni riportate sono puramente indicative,

Le specifiche disponibili sono da verificare al momento dell'offerta.