




## X500 SERVER FULLY RUGGED NOTEBOOK

- Intel® Xeon® Processor E3-1505M v6
- 15.6" TFT LCD FHD with Getac QuadraClear® sunlight readable display
- Optional NVIDIA® Quadro® P2000 4GB discrete graphics controller
- Optional RAID expansion unit with up to 5TB storage capacity and RAID configurable 0,1,5



X500server 3D  
demo

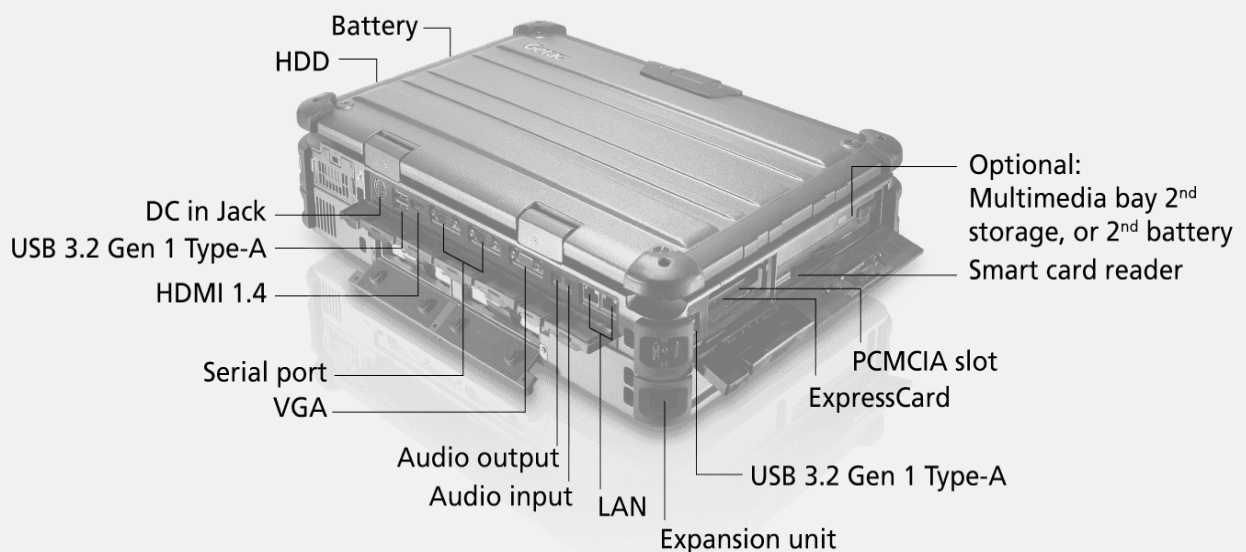

# SPECIFICATIONS

## Generation

G3

## Operating System

Windows Server 2019

## Mobile Computing Platform

Intel® Xeon® Processor E3-1505M v6 3.0GHz,

Max. 4.0GHz

- 8MB Intel® Smart Cache

## VGA Controller

Intel® HD Graphics P630

## Display

15.6" TFT LCD FHD (1920 x 1080)

Protection film

1,000 nits QuadraClear® sunlight readable display

## Storage & Memory

32GB DDR4 / 32GB DDR4 ECC

Optional: 64GB DDR4 / 64GB DDR4 ECC

500GB SATA HDD / 512GB SATA SSD

Optional: 1TB / 2TB SATA SSD

Disk management: RAID 0 / RAID 1<sup>i</sup>

## Keyboard

LED backlit membrane keyboard with integrated numeric keypad

Optional: LED backlit rubber keyboard

## Pointing Device

Touchpad

- Touchpad with two buttons

## Expansion Slots

Smart card reader x 1

ExpressCard/54 x 1

PCMCIA Type II x 1

## Multimedia Bay

2<sup>nd</sup> storage: HDD 500GB

Optional 2<sup>nd</sup> storage: 1TB HDD / 512GB SSD /

1TB / 2TB SSD

Optional 2<sup>nd</sup> battery<sup>ii</sup>: 10.8V, 9240mAh, 99.8Wh

## X Bay

Optional: SATA HDD / SSD 3TB maximum expandable to 5TB

Disk management: RAID 0, RAID 1, RAID 5

## I/O Interface

Audio input (Mini-jack) x 1

Audio output (Mini-jack) x 1

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 4

LAN (RJ45) x 2

HDMI 1.4 x 1

External VGA (15-pin; D-sub) x 1

Serial port (9-pin; D-sub) x 2

## Communication Interface

10/100/1000 base-T Ethernet

Optional: Dedicated GPS

## Security Features

TPM 2.0

Kensington lock

Intel® vPro® Technology

Smart card reader

## Power

AC adapter (150W, 100-240VAC, 50/60Hz)

Li-ion battery (10.8V, 9240mAh, 99.8Wh)

Optional: Multimedia bay 2<sup>nd</sup> Li-ion battery (10.8V, 9240mAh, 99.8Wh)<sup>ii</sup>

## Dimension (W x D x H) & Weight

410 x 320 x 65mm (16.1" x 12.6" x 2.5")

5.2kg (11.4lbs)<sup>iii</sup>

410 x 320 x 119mm (16.1" x 12.6" x 4.6")<sup>iv</sup>

8.6kg (18.9lbs)<sup>iii,iv</sup>

## Rugged Features

MIL-STD-810H certified

IP65 certified

Vibration & drop resistant

Full magnesium alloy case

Shock-protected removable HDD

## Environmental Specifications

Temperature<sup>v</sup>:

- Operating<sup>vi</sup>: -20°C to 55°C / -4°F to 131°F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

## Pre-installed Software

Getac Utility

Getac Geolocation

Adaptec Storage Manager™<sup>ii</sup>

Optional: Absolute Persistence<sup>®</sup>

## Accessories

Battery (10.8V, 9240mAh, 99.8Wh)

AC adapter (150W, 100-240VAC)

## Optional:

Backpack<sup>ii</sup>

Battery (10.8V, 9240mAh, 99.8Wh)

Multimedia bay 2<sup>nd</sup> Storage<sup>ii</sup>

Multimedia bay 2<sup>nd</sup> battery (10.8V, 9240mAh, 99.8Wh)<sup>ii</sup>

Multi-Bay charger (Dual-Bay)

AC adapter (150W, 100-240VAC)

Office dock AC adapter (150W, 100-240VAC)

Protection film

Spare SSD kit

## Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

## Standard

5 years Bumper-to-Bumper

# X500 SERVER FULLY RUGGED NOTEBOOK

- I. 2<sup>nd</sup> multimedia HDD is required for RAID 0, RAID 1 configuration.
- II. Software, hardware and accessories may vary depending on configuration.
- III. Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.
- IV. Dimension measured with expansion unit.
- V. Tested by an independent third-party test lab following MIL-STD-810H. Recommend system boot-up temperature below 40°C.
- VI. For X500 RAID expansion unit, the operating temperature is -20°C to 45°C / -4°F to 113°F.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# Getac



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel : +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/ Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.