Getac
















- Qualcomm[®] Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader



ZX70 3D demo

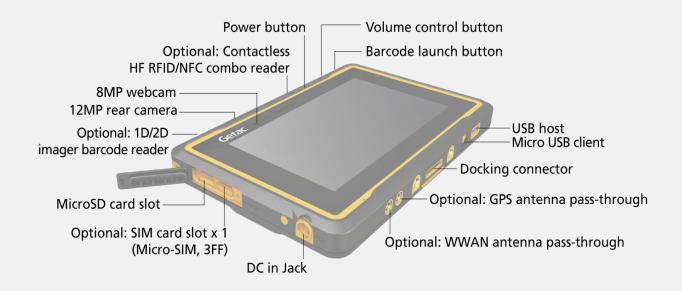

SPECIFICATIONS

Generation

Operating System Android™ 10.0

Mobile Computing Platform

Qualcomm[®] Snapdragon™ 660, Octa-core 1.95GHz

Max. 2.2GHz

VGA Controller

Qualcomm[®] Adreno™ 512 GPU

Wide Viewing Angle TFT LCD HD (1280 x 720)

Protection film

LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen

Storage & Memory 4GB LPDDR4 64GB eMMC

Kevboard

Power button 3 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

Expansion Slot

Optional: 1D/2D imager barcode reader

I/O Interface

8M pixels webcam x 1

12M pixels autofocus rear camera x 1

DC in Jack x 1

USB 2.0 (Host) x 1 MicroUSB 2.0 (Client) x 1

MicroSD x 1

Docking connector (Pogo/JAE) x 1

Optional: SIM card slot x 1 (Micro-SIM, 3FF) Optional: RF antenna pass-through for GPS and

Communication Interface Wi-Fi 802.11ac

Bluetooth (v5.0) Dedicated GPS

Optional: 4G LTE mobile broadband "

Security Features

Optional: HF RFID/NFC combo reader iv, v

AC adapter (25W, 100-240VAC, 50/60Hz) Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)

Dimension (W x D x H) & Weight 218 x 142 x 27mm (8.58" x 5.6" x 1.08") 762g (1.68lbs)

Rugged Features

MIL-STD-810H certified IP67 certified

Vibration & 6ft (1.8m) drop resistant vii Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)

Environmental Specifications

Temperature viii:
- Operating: -21°C to 60°C / -6°F to 140°F
- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed software

Getac File Browser

Getac Camera

Getac Input Method Getac Driving Safety Utility (trial version)

Getac Driving Salety Offficy (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search,
Chrome, Gmail, Maps, YouTube, Play, Drive,
YouTube music, Play movies, Duo and photos)

Optional software

Getac Driving Safety Utility Getac deployXpress Getac OEMConfig

Accessories

AC adapter (25W: 12V/2A, 100-240VAC: 50/60Hz) Capacitive stylus with tether

Pen holder

Wrist strap

Optional:

Carry bag AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)

Office dock AC adapter (60W, 110-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Capacitive stylus with tether

Protection film

Shoulder strap (2-point)

Wrist strap

Rotating hand strap with kickstand and stylus

Vehicle cradle ix

USB to RS232 converter cable Docking connector to HDMI converter cable Vehicle dock ix

Office dock

Pen holder

Bumper-to-Bumper warranty Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.
That is why Getac has introduced accidental

damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

Havis Getac-made Vehicle Gamber-Johnson Office Office Vehicle Vehicle Vehicle Dock (JAE) Dock Charging Cradle Dock (JAE) Dock (Pogo, power (Pogo) (Pogo) (JAE) (Pogo) Serial Port 1 Speaker 1 Audio 1 1 1 1 Output DC in Jack 1 1 1 1 1 1 USB Host USB USB2.0 x USB2.0 x x 2 USB USB Host x 2 Host x 2 2 MicroUSB 2 Client x 1 LAN 1 1 1 1 1 HDMI 1 (WWAN, (WWAN, (WWAN, Antenna (WWAN, GPS) GPS) GPS) GPS) Connector

ZX70 FULLY **RUGGED TABLET**

- Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. Units with 4G LTE option comes with an embedded SIM card slot.

 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). HF RFID/NFC combo reader applies to US & EU. Weight and dimensions vary from configurations and optional accessories. Drop test results vary from configurations and optional accessories.

optional accessories. Tested by an independent third-party test lab following MIL-STD-810H. Havis vehicle dock is e-mark certified. VIII.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.





15495 Sand Canyon Ave. Suite 350 Irvine, CA 92618 Tel : 949-681-2900 GetacSales_US@getac.com I www.getac.com/us/ Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.