




B360 FULLY RUGGED NOTEBOOK

- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 12th Generation Intel® Core™ Processor
- 13.3" FHD LumiBond® display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport™ battery swappable technology
- Thunderbolt™ 4 brings lightning speed and performance



B360 3D demo

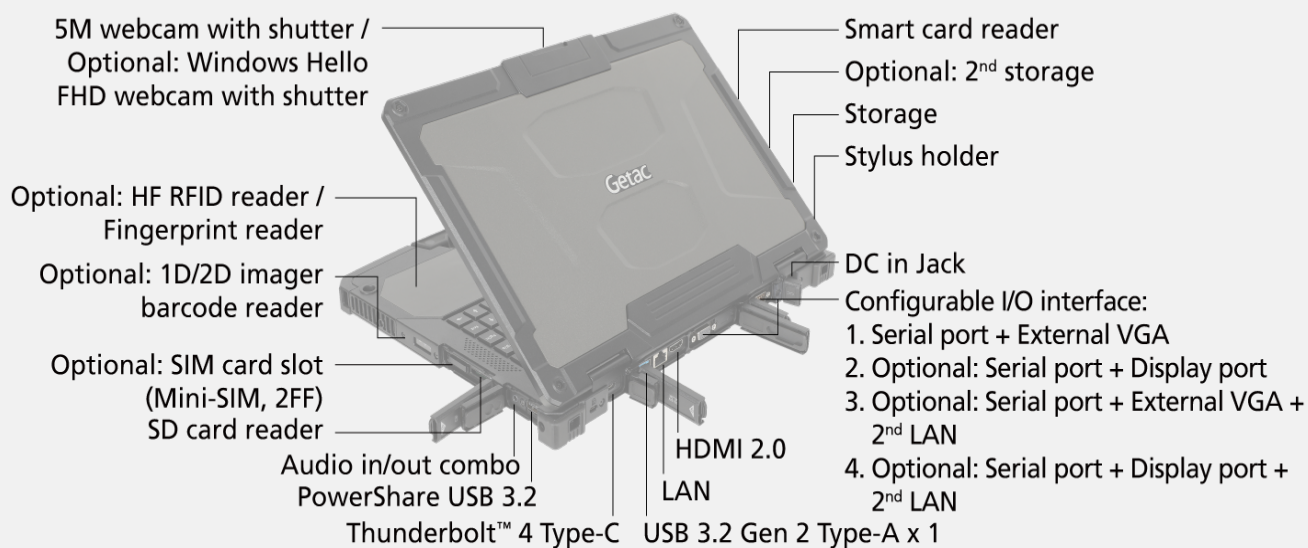

SPECIFICATIONS

Generation
G2

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ i5-1240P Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1250P vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1260P Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1270P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

VGA Controller
Intel® Iris® X^e Graphicsⁱ

Display
13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4
256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD
Optional 2nd storageⁱⁱ: 256GB / 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard
LED backlit membrane keyboard

Pointing Device
Touchscreen
- Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Expansion Slots
Smart card reader x 1
Optional: SD card reader x 1
Optional: 1D / 2D imager barcode reader

I/O Interface
5M webcam x 1^{iv}
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF)ⁱⁱⁱ
Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1^{iv}
Optional: RF antenna pass-through for GPS, WWAN and WLAN
Configurable I/O options^v:
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1

Communication Interface
10 / 100 / 1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3)^{vi}
Optional: Dedicated GPS with L1/L5^{vii}
Optional: 4G LTE mobile broadband with integrated GPS^{iii, viii}
Optional: 5G Sub-6 with integrated L1/L5 GPS^{vii, viii}

Security Features
TPM 2.0
Kensington lock
Smart card reader
Optional: Fingerprint reader^{ix}
Optional: HF RFID reader^{ix, x}
Optional: Windows Hello face-authentication
FHD camera (front-facing)^{iv}

Power
AC adapter (90W, 100-240VAC, 50/60Hz)
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2
LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight
342 x 281 x 34.9 mm (13.46" x 11.06" x 1.37")
2.32kg (5.11lbs)^{xi}

Rugged Feature
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xii}
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{xiii}
Optional: Salt fog certified

Environmental Specification
Temperature^{xiv},
- Operating: -29°C to 63°C / -20°F to 145°F^{xv}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed software
Getac Utility
Getac Geolocation
Getac Barcode Manager^{xvi}
Optional: Absolute Persistence®

B360 FULLY
RUGGED NOTEBOOK

Optional software
Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xvii}

Accessories
Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:
Carry bag
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Office dock AC adapter (120W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle^{xviii}
Vehicle dock^{xviii}
Office dock
Spare SSD kit
100W Type-C adapter

Bumper-to-Bumper warranty
Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

- I. Units equipped with dual channel memory come with Intel® Iris® X^e Graphics.
- II. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- III. Units with 4G LTE option come with an embedded SIM card slot.
- IV. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- V. External VGA and Display port are mutually exclusive.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VIII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IX. Fingerprint reader and HF RFID reader are mutually exclusive.
- X. HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XI. Weight and dimensions vary from configurations and optional accessories.
- XII. MIL-STD-461 90W AC adapter sold separately.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVI. Available when barcode reader option is selected.
- XVII. Models require either embedded or standalone GPS module.
- XVIII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (GPS, WWAN, WLAN)	-



GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale
Colleoni, Palazzo Cassiopea 3 20864
Agrate Brianza (MB) Tel: +39 039 8901584
Sales-getac-Italy@getac.com |
www.getac.com/it/
Copyright © 2023 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved. Le
informazioni riportate sono puramente indicative,
Le specifiche disponibili sono da verificare al
momento dell'offerta.