




ZX10 FULLY RUGGED TABLET

- Processore Qualcomm® Snapdragon™ 660, Octa-core
- Schermo Lumibond® da 10.1" con tecnologia Getac leggibile alla luce del sole e touchscreen capacitivo, utilizzabile con i guanti
- Doppia batteria sostituibile a caldo per un funzionamento ininterrotto
- Certificato per cadute fino a 1,8 metri (6ft), MIL-STD-810H e IP66
- Lettore Barcode 1D/2D Imager opzionale
- Verificato come Android enterprise recommended^{vi}

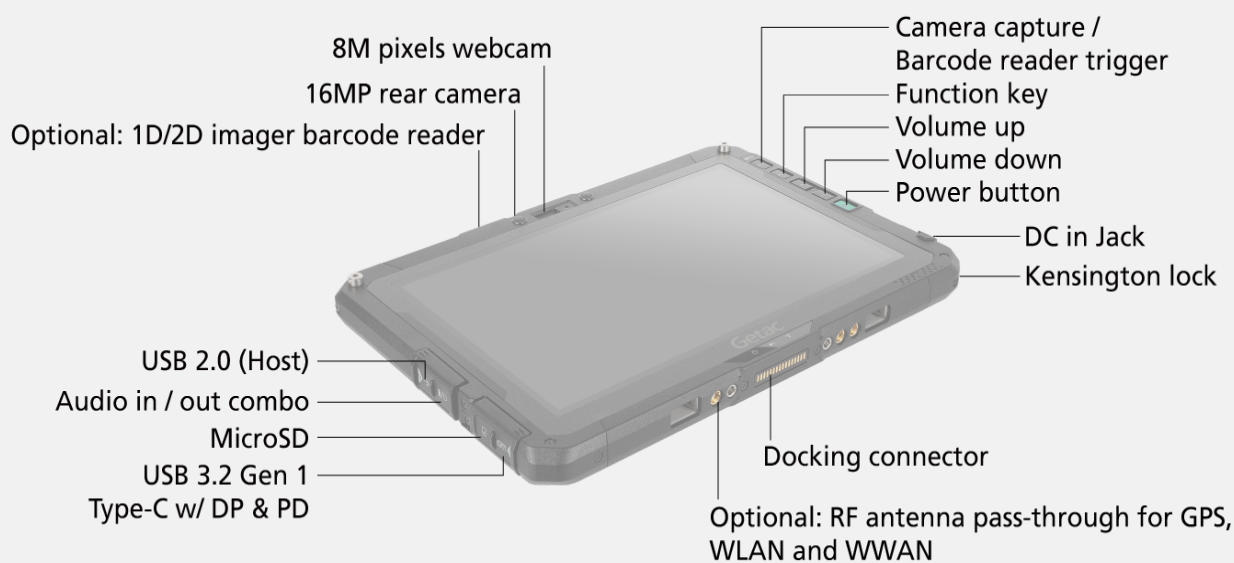

SPECIFICATIONS

Generation
G1

Operating System
Android™ 12.0

Mobile Computing Platform
Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz
Max. 2.2GHz

VGA Controller
Qualcomm® Adreno™ 512 GPU

Display
10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
800 nits LumiBond® display with Getac sunlight
readable technology
Capacitive multi-touch screen

Storage & Memory
4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Device Button
Power button
4 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo reader ⁱ

I/O Interface
8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1
Docking connector x 1
Optional: SIM card slot x 2 (Micro-SIM, 3FF) ^{vii}
Optional: RF antenna pass-through for GPS and
WWAN

Communication Interface
Wi-Fi 802.11 ac
Bluetooth (v5.0) ⁱⁱ
Dedicated GPS
Optional: 4G LTE mobile broadband ^{vii}
Dual Micro SIM ^{vii}

Security Feature
Kensington lock
Optional: HF RFID/NFC combo reader ⁱ
Optional: Smart card reader

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery(3.84V,typical 4990mAh;min.
4870mAh)x 2
LifeSupport™ battery swappable technology
Optional: High capacity Li-ion battery (3.84V,
typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight
275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
1.04kg (2.29lbs) ⁱⁱⁱ

Rugged Feature
MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification
Temperature ^{iv}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search,
Chrome, Gmail, Maps, YouTube, Play, Drive,
YouTube music, Google TV, Duo and photos)
Getac enrollXpress

Optional software
Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories
Battery (3.84V, typical 4990mAh; min.
4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:
Carry bag
Battery (3.84V, typical 4990mAh; min.
4870mAh)
High capacity Li-ion battery (3.84V, typical
9980mAh; min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Office dock AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 22-32VDC)
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Vehicle dock ^v
Office dock
100W Type-C adapter
Hard handle

Bumper-to-Bumper warranty
Gli imprevisti possono compromettere l'utilizzo
dei dispositivi e causare costosi tempi di
inattività. Ecco perché Getac ha introdotto la
copertura dei danni accidentali come standard
della garanzia Bumper-to-Bumper, consentendo
una migliore gestione dei costi legati all'IT.
Bumper-to-Bumper è la garanzia senza
problemi. Questo significa che potete contare
su di noi affinché il vostro dispositivo sia
nuovamente operativo nel giro di pochi giorni.

Standard
3 anni Bumper-to-Bumper

ZX10 FULLY
RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Gamber Johnson and Havis vehicle docks are e-mark certified.
- VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- VII. Units with 4G LTE option come with two embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Office Dock (Pogo)	
Serial Port	-
Microphone	1
Audio Output	1
DC in Jack	1
USB	USB 2.0 x 3
LAN	1
HDMI	1
RF Pass-through	-
Kensington Lock	1

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale
Colleoni, Palazzo Cassiopea 3 20864
Agrate Brianza (MB) Tel: +39 039 8901584
Sales-getac-Italy@getac.com I
www.getac.com/it/ Copyright © 2022 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Le informazioni riportate sono
puramente indicative, Le specifiche disponibili sono
da verificare al momento dell'offerta.