




B360 PRO FULLY RUGGED NOTEBOOK

- Certification MIL-STD 810H et IP66, avec résistance aux chutes de 1,8 m (6 pi) ainsi qu'au brouillard salin (en option)
- Processeur Intel® Core™ de 12e génération
- Écran tactile capacitif LumiBond® Full HD de 13,3" avec technologie de lecture en plein soleil Getac (1 400 nits)
- Contrôleur graphique NVIDIA® GeForce® GTX1650 4 Go (en option)
- Sécurité d'entreprise améliorée avec le double stockage remplaçable par l'utilisateur, la caméra de reconnaissance faciale Windows Hello, le lecteur imageur de code-barres 1D/2D intégré et de nombreuses autres options d'authentification multifacteur
- Technologie de batterie remplaçable à chaud LifeSupport™

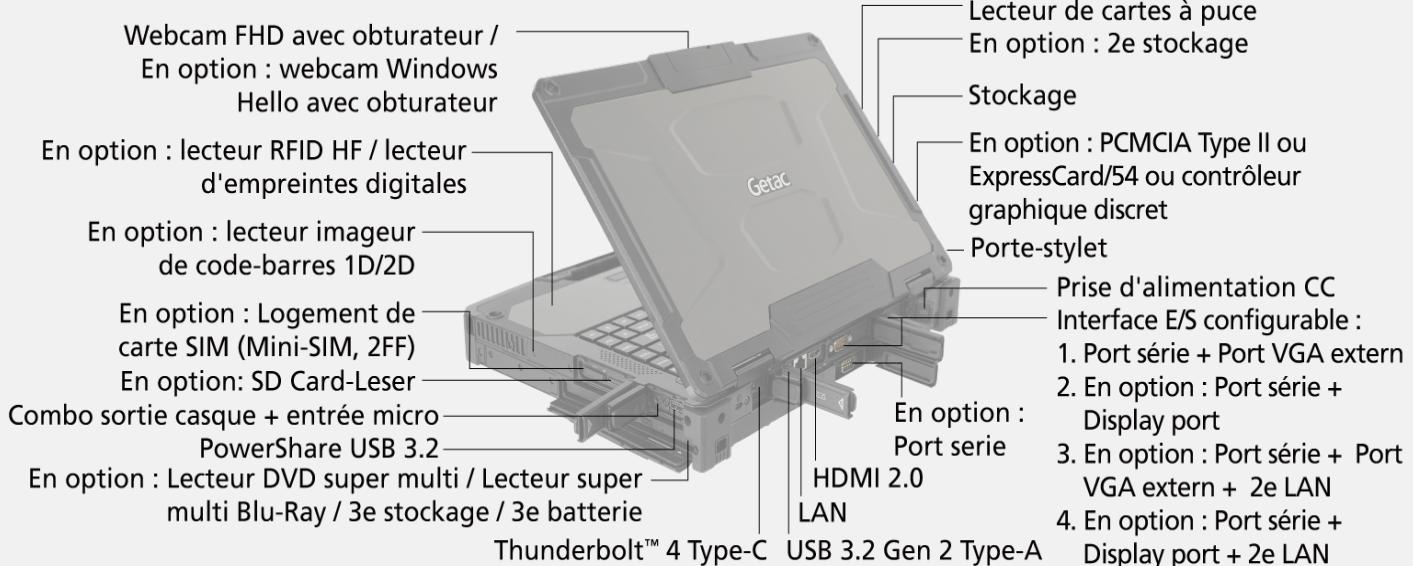

SPÉCIFICATIONS

Generation
G2

Système d'exploitation
Windows 11 Pro

Plateforme informatique mobile
Intel® Core™ i5-1240P Processor
Max. 4.4GHz with Intel® Turbo Boost
Technology

- 12MB Intel® Smart Cache
Platform options:
Intel® Core™ i5-1250P vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost
Technology
- 12MB Intel® Smart Cache
Intel® Core™ i7-1260P Processor
Max. 4.7GHz with Intel® Turbo Boost
Technology
- 16MB Intel® Smart Cache
Intel® Core™ i7-1270P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost
Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost
Technology
- 24MB Intel® Smart Cache

Contrôleur Graphique
Intel® Iris® Xe Graphics i
Optional: NVIDIA® GeForce® GTX1650 4GB
discrete graphics controller ii, iii

Écran
13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

Stockage et mémoire
8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4
256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD
Optional 2nd storage iv: 256GB / 512GB / 1TB / 2TB PCIe NVMe SSD
Optional multimedia bay storage : 1TB / 2TB SATA SSD

Clavier
LED backlit membrane keyboard

Pérophérique de pointage
Touchscreen
- Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Logement d'extension
Smart card reader x 1
Optional: SD card reader x 1
Optional: Discrete graphics controller, or PCMCIA Type II, or ExpressCard/54 iii
Optional: 1D/2D imager barcode reader

Baie multimédia
Configurable options v, vi:
1. Optional: DVD super multi drive, or Blu-Ray super multi drive, or 3rd storage
2. Optional: 3rd battery

Interface d'E/S

5M webcam x 1 xxii
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1 vii
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) viii
Optional: Windows Hello face-authentication FHD camera (front-facing) x 1 xxii
Optional: RF antenna pass-through for GPS, WWAN and WLAN
Configurable I/O options ix:
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
6. Serial port (9-pin; D-sub) x 2 + Display port x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2nd LAN (RJ45) x 1

Interface de communication

10/100/1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3) x
Optional: Dedicated GPS with L1/L5 xxiii
Optional: 4G LTE mobile broadband with integrated GPS viii, xxiv
Optional: 5G Sub-6 with integrated L1/L5 GPS xxiii, xxv

Fonctionnalités de sécurité

TPM 2.0
Kensington lock
Smart card reader
Optional: Fingerprint reader xi
Optional: HF RFID reader xi, xii
Optional: Windows Hello face-authentication FHD camera (front-facing) xxii

Alimentation

AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz) ii
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1
LifeSupport™ battery swappable technology

Dimensions (L x P x H) et poids

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08kg (6.79lbs) xiii

Caractéristiques de conception renforcée

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified xiv
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) xv
Optional: Salt fog certified

Spécifications environnementales

Temperature xvi :
- Operating: -29°C to 63°C / -20°F to 145°F xvii
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Logiciels préinstallés

Getac Utility
Getac Geolocation
Getac Barcode Manager xviii
Optional: Absolute Persistence®

Logiciel en option

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility xix

B360 PRO FULLY RUGGED NOTEBOOK

Accessoires

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether
Optional:
Carry bag
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter (120W, 100-240VAC) ii
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle xx
Vehicle dock xx
Office dock
Spare SSD kit
100W Type-C adapter xxi

Garantie Bumper-to-Bumper

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

i. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics. ii. 120W AC adapter is used for office dock and for device configured with discrete graphics card. iii. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive. iv. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase. v. Option 1 and 2 are mutually exclusive. vi. Factory option. Not user swappable. vii. The configuration with a discrete graphic controller does not support USB-C power delivery function. viii. Units with 4G LTE option come with an embedded SIM card slot. ix. External VGA and Display port are mutually exclusive. x. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. xi. Fingerprint reader and HF RFID reader are mutually exclusive. xii. HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and Felica™ compliant). xiii. Weight and dimensions vary from configurations and optional accessories. xiv. MIL-STD-461 90W AC adapter sold separately. xv. Available with limited configurations and environment conditions. xvi. Tested by an independent third-party test lab following MIL-STD-810H. xvii. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F. xviii. Available when barcode reader option is selected. xix. Models require either embedded or standalone GPS module. xx. Gamber Johnson and Havis vehicle docks are e-mark certified. xxi. Do not support the configurations with discrete graphics card. xxii. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options. xxiii. Support GPS, GLONASS, Galileo, BeiDou and QZSS. xxiv. One physical SIM card slot and one eSIM. Network services may vary depending on local telecommunication providers.

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12 80 60 Sales-Getac-France@getac.com I

www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.

	Station d'accueil pour véhicule	Station d'accueil pour bureau
Port série	1	1
Port VGA externe	1	1
Micro	1	1
Sortie audio	1	1
Prise d'alimentation CC	1	1
Port USB	6	5
Port LAN	2	2
Port HDMI	1	1
Connecteur d'antenne RF (GPS et WWAN)		-