




S410 SEMI RUGGED NOTEBOOK

- Processeur Intel® Core™ i5/i7 vPro™ de 11e génération
- Caméra de reconnaissance faciale Windows Hello (en option) avec capteur infrarouge et double authentification biométrique par empreintes digitales
- Thunderbolt™ se distingue par sa très haute vitesse et ses performances inégalées
- Grande flexibilité de configuration et nombreuses options d'E/S
- Large plage de températures de fonctionnement comprise entre -29 °C et 63 °C (-20 °F et 145 °F)



S410 3D demo

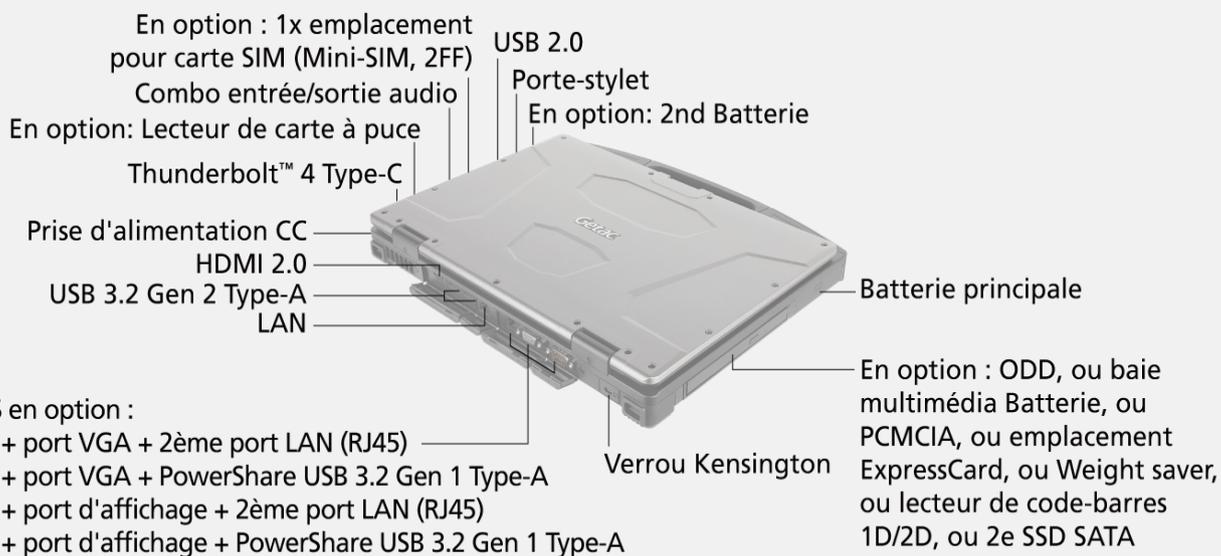

SPÉCIFICATIONS

Generation

G4

Système d'exploitation

Windows 11 Pro

Plateforme informatique mobile

Intel® Core™ i3-1115G4 Processor
Max. 4.1GHz with Intel® Turbo Boost Technology

- 6MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Contrôleur Graphique

Intel® Iris® Xe Graphics (i5 / i7) i

Intel® UHD Graphics (i3)

Optional: NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller ii, iii, iv

Écran

14" TFT LCD HD (1366 x 768)

Protection film

1,000 nits display with Getac sunlight readable technology

Optional: 14" TFT LCD HD (1366 x 768)

1000 nits display with Getac sunlight readable technology and capacitive multi-touch screen

Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080)

1000 nits display with Getac sunlight readable technology

Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080)

1000 nits display with Getac sunlight readable technology and capacitive multi-touch screen

8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional: Multimedia bay 2nd storage: 256GB / 512GB / 1TB SATA SSD iii

Stockage et mémoire

8 Go DDR4

En option : 16 Go/32 Go/64 Go DDR4

SSD PCIe NVMe 256 Go

En option : SSD PCIe NVMe 512 Go / 1 To / 2 To

En option : Stockage secondaire pour baie multimédia :

SSD SATA 256 Go/512 Go/1 Toⁱⁱⁱ

Clavier

LED backlit membrane keyboard

Périphérique de pointage

Touchscreen

Optional: Capacitive multi-touch screen

Touchpad

- Glide touchpad with multi-touch

Logement d'extension

Optional: Smart card reader x 1

Baie multimédia

Weight saver

Optional: 1D/2D imager barcode reader iii

Optional: PCMCIA Type II i

Optional: ExpressCard/34 / 54 iii, v, vi

Optional: DVD super multi drive iii, vii

Optional: Multimedia bay battery iii, vii

Optional: Blu-Ray super multi drive iii, vii

Optional: 2nd storage iii, vii

Interface d'E/S

Audio in/out combo x 1

DC in Jack x 1

USB 2.0 x 1

USB 3.2 Gen 2 Type-A x 2

Thunderbolt™ 4 Type-C x 1

LAN (RJ45) x 1

HDMI 2.0 x 1

Docking connector x 1

Optional: 5M webcam x 1

Optional: SIM card slot x 1 (Micro-SIM, 2FF) viii

Optional: Windows Hello face-authentication

FHD camera (front-facing) x 1 ix

Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options vi:

1. Serial port (9-pin; D-sub) + VGA port (15-pin; D-sub) + 2nd LAN (RJ45)

2. Serial port (9-pin; D-sub) + VGA port (15-pin; D-sub) + PowerShare USB 3.2 Gen 1 Type-A

3. Serial port (9-pin; D-sub) + Display port + 2nd LAN (RJ45)

4. Serial port (9-pin; D-sub) + Display port + PowerShare USB 3.2 Gen 1 Type-A

Interface de communication

10/100/1000 base-T Ethernet

Intel® Wi-Fi 6 AX201, 802.11ax

Bluetooth (v5.2) x

Optional: Dedicated GPS xi

Optional: 4G LTE mobile broadband with integrated GPS xi, xii

Optional: 5G Sub-6 with integrated L1/L5 GPS xxi

Fonctionnalités de sécurité

TPM 2.0

Kensington lock

Optional: Intel® vPro® Technology

Optional: Fingerprint reader

Optional: HF RFID reader vii, xi

Optional: Smart card reader

Optional: Windows Hello face-authentication

FHD camera (front-facing) ix

Alimentation

AC adapter (90W, 100-240VAC, 50/60Hz)

Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)

Optional: AC adapter (120W, 100-240VAC, 50/60Hz) ii

Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) iii

Optional: 2nd battery (10.8V, typical 6900mAh; min. 6600mAh)

Dimensions (l x P x H) et poids

350 x 293 x 38,5 mm (13,8" x 11,5" x 1,5")

2,38 kg (5,25 lb)^{xi}

Caractéristiques de conception renforcée

MIL-STD-810H certified

IP53 certified

Splash resistant keyboard

Vibration & 3ft (0.9m) drop resistant xiv

Sealed ports and connectors

Shock-protected removable SSD

Spécifications environnementales

Temperature xv:

- Operating: -29°C to 63°C / -20°F to 145°F xvi

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Logiciels préinstallés

Getac Utility

Getac Geolocation

Getac Barcode Manager xvii

Optional: Absolute Persistence®

Logiciel en option

Getac Driving Safety Utility

Getac Device Monitoring System (GDMS)

Getac VGPS Utility xviii

S410 SEMI RUGGED NOTEBOOK

Accessoires

Battery (10.8V, typical 6900mAh; min. 6600mAh)

AC adapter (90W, 100-240VAC, 50/60Hz)

Capacitive stylus with tether

Optional:

Battery bag

Carry bag (10.8V, typical 6900mAh; min. 6600mAh)

Multimedia 2nd SSD iii

Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) iii

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (120W, 100-240VAC, 50/60Hz) ii

DC-DC vehicle adapter (120W, 11-32VDC)

Capacitive stylus with tether

Protection film

Vehicle cradle xix

Vehicle dock xix

Office dock

100W Type-C adapter xx

Garantie

Rien n'est plus synonyme de qualité qu'un fabricant fier de son produit. Nous avons conçu l'ordinateur portable de l'intérieur pour résister aux chutes, aux chocs, aux déversements, aux vibrations et plus encore. Nous avons confiance en notre qualité et c'est pourquoi il est livré en standard avec une garantie de 3 ans, la meilleure du secteur. C'est la tranquillité d'esprit de savoir que vous êtes couvert.

Standard

Garantie limitée de 3 ans

i. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics. ii. 120W AC adapter is used for office dock and for device configured with discrete graphics card. iii. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller, PCMCIA, Blu-Ray, DVD super multi drive, Express card, Multimedia bay battery, 1D/2D imager barcode reader and 2nd storage are mutually exclusive options. iv. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller is required to configure with Intel® Core™ i5/i7 processor, Dual battery, FHD LCD display with capacitive multi-touch screen, and 120W AC adapter. v. Factory option. Not user swappable. vi. HF RFID reader and express card are mutually exclusive. vii. Trained user swappable. viii. Units with 4G LTE option comes with an embedded SIM card slot. ix. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options. x. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. xi. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass. xii. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). xiii. Weight and dimensions vary from configurations and optional accessories. xiv. Drop test results vary from configurations and optional accessories. xv. Tested by an independent third-party test lab following MIL-STD-810H. xvi. For S410 optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F. xvii. Available when barcode reader option is selected. xviii. Models require either embedded or standalone GPS module. " xix. Havis vehicle dock is e-mark certified. xx. Do not support the configurations with discrete graphics card. xxi. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in the US, UK, EU, Australia and New Zealand.

	Station d'accueil pour véhicule	Station d'accueil pour bureau
Port série	1	1
Port VGA externe	1	1
Micro	1	1
Sortie audio	1	1
Prise d'alimentation CC	1	1
Port USB	4	USB 3.0 x 1 USB 2.0 x 3
Port LAN	1	1
Port HDMI	1	1

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12
80 60 Sales-Getac-France@getac.com |
www.getac.com/fr/ Copyright © 2023 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Les informations sont fournies
ici pour référence seulement, les spécifications
disponibles doivent faire l'objet d'un devis sur
demande.

Station d'accueil pour véhicule

Station d'accueil pour bureau

Connecteur d'antenne RF

3 (WWAN, WLAN et GPS)

-