




X600 PRO FULLY RUGGED NOTEBOOK

- Processeur de 11ème génération Intel® Core™ i7 / i5 vPro®
- Écran LumiBond® FHD de 15,6 pouces avec technologie Getac de lecture en plein soleil (1 000 nits) et écran tactile capacitif en option
- Fonctions de sécurité d'entreprise améliorées avec TPM 2.0, verrou Kensington, triple disques durs remplaçables par l'utilisateur et lecteur de cartes à puce
- Connectivité d'E/S polyvalente, notamment Thunderbolt™ 4 et connecteur station d'accueil
- Carte graphique NVIDIA® Quadro® RTX3000 en option
- Empacements modulables pour l'ajout de ports de communication, batteries, lecteur DVD super multi



X600 Pro 3D
demo

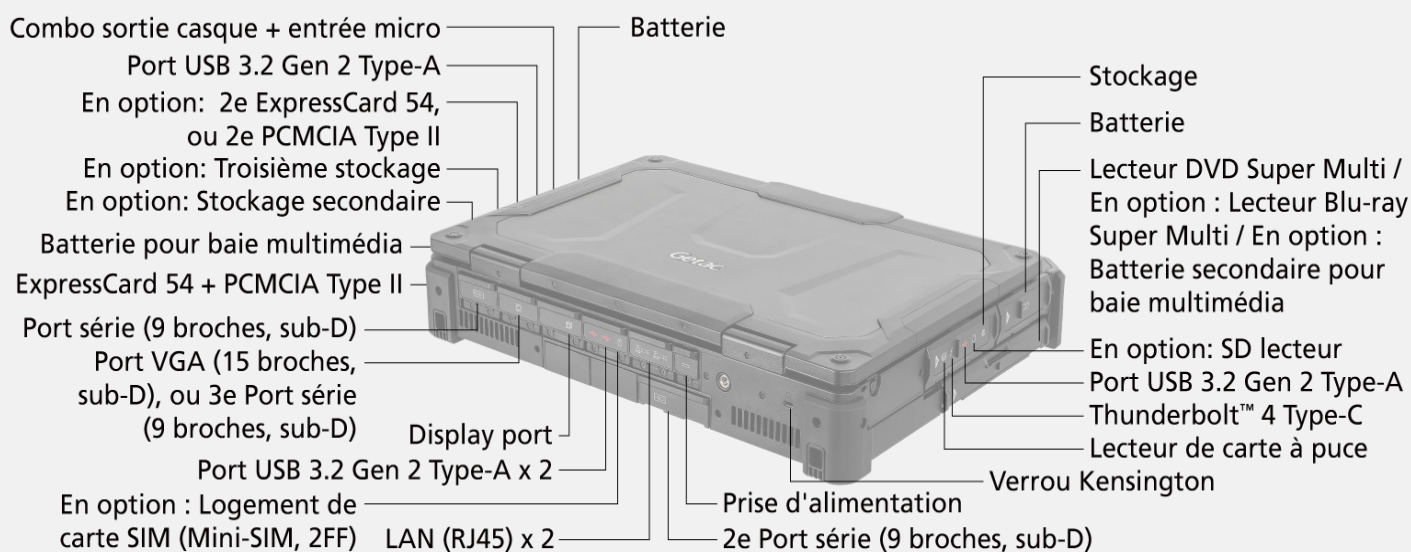

SPÉCIFICATIONS

Generation
G1

Système d'exploitation
Windows 11 Pro

Plateforme informatique mobile
Intel® Core™ i5-11500HE vPro® Processor
Max. 4.6GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache
Platform options:
Intel® Core™ i7-11850HE vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache
Intel® Xeon® W-11865MRE vPro® Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 24 Intel® Smart Cache

Contrôleur Graphique
Intel® UHD Graphics
Optional: NVIDIA® Quadro® RTX3000 6GB discrete graphics controller i, ii, iii
Optional: NVIDIA® GeForce® GTX1650 4GB discrete graphics controller i, ii

Écran
15.6" TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond® display with Getac sunlight readable technology
Optional: Capacitive multi-touch screen

Stockage et mémoire
16GB DDR4
Optional: 32GB / 64GB / 128GB DDR4
512GB PCIe SSD
Optional: 1TB / 2TB PCIe SSD
Optional 2nd storage: 512GB / 1TB / 2TB PCIe SSD
Optional 3rd storage: 512GB / 1TB / 2TB PCIe SSD

Clavier
LED backlit membrane keyboard with integrated numeric keypad

Périphérique de pointage
Touchscreen
- Optional: Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

Logement d'extension
Smart card reader
ExpressCard 54 + PCMCIA Type II
Optional: 2nd ExpressCard 54 or 2nd PCMCIA Type II iv
Optional: SD card reader

Logement d'extension
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh)
DVD super multi drive v
Optional: Multimedia bay 2nd battery (11.1V, typical 4200mAh; min. 3980mAh) or Blu-Ray super multi drive v

Interface d'E/S
5M webcam x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 4
Thunderbolt™ 4 Type-C x 1
LAN (RJ45) x 2
HDMI 2.0 x 1
Docking connector x 1
External VGA (15-pin; D-sub) x 1 or 3rd Serial port (9-pin; D-sub) x 1 vi
Serial port (9-pin; D-sub) x 2
Optional: SIM card slot x 1 (Mini-SIM, 2FF) vii
Display port x 1
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Interface de communication
2.5GBASE-T Ethernet
Intel® Wi-Fi 6E AX210, 802.11ax
Bluetooth (v5.2) viii
Optional: Dedicated GPS ix
Optional: 4G LTE mobile broadband with integrated GPS vii, ix

Fonctionnalités de sécurité
TPM 2.0
Kensington lock
Smart card reader
Intel® vPro® Technology

Alimentation
AC adapter (230W, 100-240VAC, 50/60Hz) i
Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) x 1
Optional: Multimedia bay 2nd battery (11.1V, typical 4200mAh; min. 3980mAh) v

Dimensions (l x P x H) et poids
412 x 322 x 77.4mm (16.22" x 12.68 x 3.05") x
6.05kg (13.34lbs) x

Caractéristiques de conception renforcée
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified xi
Vibration and 4ft (1.2m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Spécifications environnementales
Temperature xii:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Logiciels préinstallés
Getac Utility
Getac Geolocation
Optional: Absolute Persistence®

X600 PRO FULLY
RUGGED NOTEBOOK

Accessoires
Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
AC adapter (230W, 100-240VAC, 50/60Hz) i
Capacitive stylus with tether
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) x 1
Optional:
Backpack
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh)
Multi-Bay charger (Dual-Bay)
Multimedia bay DVD super multi drive v
Multimedia bay Blu-Ray super multi drive v
AC adapter (230W, 100-240VAC, 50/60Hz) i
Office dock AC adapter (230W, 100-240VAC, 50/60Hz) i
MIL-STD-461 AC adapter (230W, 100-240VAC) xi
DC-DC vehicle adapter (230W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle dock
Office dock
Spare SSD kit

Garantie Bumper-to-Bumper
Les accidents surviennent quand on s'y attend le moins, en particulier lorsque les produits sont soumis à des conditions difficiles, et peuvent engendrer une mise hors service des équipements et des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard
3 ans Bumper-to-Bumper

i. The configuration with a discrete graphic controller requires the 230W AC adapter. ii. 150W AC adaptor is not applicable with discrete graphic controller nor office dock. iii. For X600 Pro optional NVIDIA® Quadro® RTX3000, the operating temperature is 0°C to 63°C / 32°F to 145°F. iv. The 2nd ExpressCard 54 and the 2nd PCMCIA Type II card readers are mutually exclusive. v. DVD super multi drive, Blu-Ray super multi drive, and the 2nd multimedia bay battery are mutually exclusive. vi. The 3rd Serial port is optional and mutually exclusive with External VGA. vii. Units with 4G LTE option comes with an embedded SIM card slot. viii. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. ix. Dedicated GPS and 4G LTE are mutually exclusive options. x. Weight and dimensions vary from configurations and optional accessories. xii. MIL-STD-461 230W AC adapter sold separately. xiii. Tested by an independent third-party test lab following MIL-STD-810H.

	Office Dock	Vehicle Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	-
Audio Output	1	-
DC in Jack	1	1
USB	5	6
LAN	2	2
HDMI	1	1
Display port	1	1
RF Antenna Connector	-	1 (GPS, WWAN, WLAN)
Kensington lock	1	1

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12
80 60 Sales-Getac-France@getac.com I
www.getac.com/fr/ Copyright © 2023 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Les informations sont fournies
ici pour référence seulement, les spécifications
disponibles doivent faire l'objet d'un devis sur
demande.