




S410 RUGGED LAPTOP

- 11th Generation Intel® Core™ i7 / i5 vPro® Processor
- Optional Windows Hello face-authentication camera with IR sensor and fingerprint dual biometric authentication
- Thunderbolt™ 4 brings lightning speed and performance
- Greater flexibility and I/O options
- Wider range of operating temperatures of -29°C ~ 63°C (-20°F ~ 145°F)



S410 3D demo

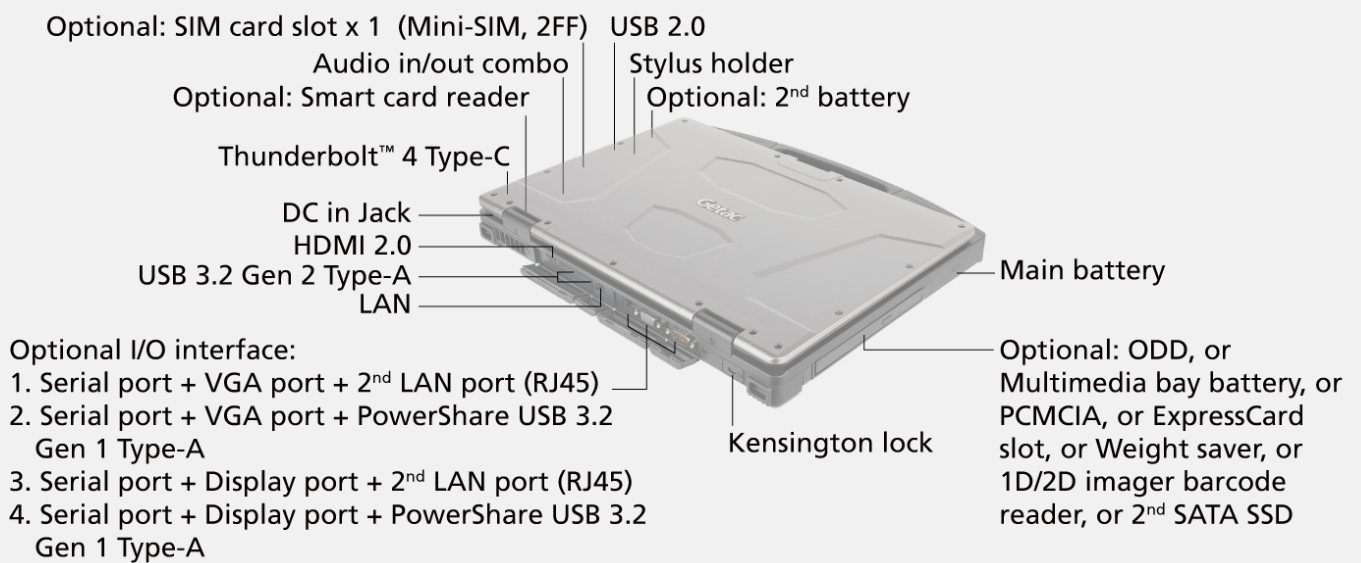

SPECIFICATIONS

Generation

G4

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor
Max. 4.1GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform Options:

Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® Iris® Xe Graphics (i5/i7) ⁱ
Intel® UHD Graphics (i3)
Optional: NVIDIA® GeForce® GTX 1650 4GB
discrete graphic controller ^{ii, iii, iv}

Display

14" TFT LCD HD (1366 x 768)
Protection film
1,000 nits display with Getac sunlight readable technology
Optional: 14" TFT LCD HD (1366 x 768)
1,000 nits display with Getac sunlight readable technology and capacitive multi-touch screen
Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
1,000 nits display with Getac sunlight readable technology
Optional: 14" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
1,000 nits display with Getac sunlight readable technology and capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD
Optional: Multimedia bay 2nd storage: 256GB / 512GB / 1TB SATA SSD ⁱⁱⁱ

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen
- Optional: Capacitive multi-touch screen
Touchpad
- Glide touchpad with multi-touch

Expansion Slot

Optional: Smart card reader x 1

Multimedia Bay

Weight saver
Optional: 1D/2D imager barcode reader ⁱⁱⁱ
Optional: PCMCIA Type II ⁱ
Optional: ExpressCard/34 / 54 ^{iii, v, vi}
Optional: DVD super multi drive ^{iii, vii}
Optional: Multimedia bay battery ^{iii, vii}
Optional: Blu-Ray super multi drive ^{iii, vii}
Optional: 2nd storage ^{iii, vii}

I/O Interface

Audio in/out combo x 1
DC in Jack x 1
USB 2.0 x 1
USB 3.2 Gen 2 Type-A x 2
Thunderbolt™ 4 Type-C x 1
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: 5M webcam x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{viii}
Optional: Windows Hello face-authentication FHD camera (front-facing) x 1 ^{ix}
Optional: RF Antenna Pass-through for GPS, WWAN and WLAN

Configurable I/O options ^{vi}:

1. Serial port (9-pin; D-sub) + VGA port (15-pin; D-sub) + 2nd LAN (RJ45)
2. Serial port (9-pin; D-sub) + VGA port (15-pin; D-sub) + PowerShare USB 3.2 Gen 1 Type-A
3. Serial port (9-pin; D-sub) + Display port + 2nd LAN (RJ45)
4. Serial port (9-pin; D-sub) + Display port + PowerShare USB 3.2 Gen 1 Type-A

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2) ^x
Optional: Dedicated GPS ^{xi}
Optional: 4G LTE mobile broadband with integrated GPS ^{xi, xii}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Fingerprint Reader
Optional: HF RFID reader ^{vii, xii}
Optional: Smart card reader
Optional: Windows Hello face-authentication FHD camera (front-facing) ^{ix}

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)
Optional: AC adapter (120W, 100-240VAC, 50/60Hz) ⁱⁱ
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) ⁱⁱⁱ
Optional: 2nd battery (10.8V, typical 6900mAh; min. 6600mAh)

Dimension (W x D x H) & Weight

350 x 293 x 38.5mm (13.8" x 11.5" x 1.5")
2.38kg (5.25lbs) ^{xiii}

Rugged Feature

MIL-STD-810H certified
IP53 certified
Splash resistant keyboard
Vibration 8amp; 3ft (0.9m) drop resistant ^{xiv}
Sealed ports and connectors
Shock-protected removable SSD

Environmental Specification

Temperature ^{xv}:
- Operating: -29°C to 63°C / -20°F to 145°F ^{xvi}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager ^{xvii}
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{xviii}

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (90W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia 2nd SSD ⁱⁱⁱ
Multimedia bay battery (11.1V, typical 4200mAh; min. 3980mAh) ⁱⁱⁱ
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (120W, 100-240VAC, 50/60Hz) ⁱⁱ
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle ^{xix}
Vehicle dock ^{xx}
Office dock
DS100 USB-C docking station
100W Type-C adapter ^{xx}

Warranty

Rien n'est plus synonyme de qualité qu'un fabricant fier de son produit. Nous avons conçu l'ordinateur portable de l'intérieur pour résister aux chutes, aux chocs, aux déversements, aux vibrations et plus encore. Nous avons confiance en notre qualité et c'est pourquoi il est livré en standard avec une garantie de 3 ans, la meilleure du secteur. C'est la tranquillité d'esprit de savoir que vous êtes couvert.

Standard

Garantie limitée de 3 ans

S410 RUGGED LAPTOP

- I. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller, PCMCIA, Blu-Ray, DVD super multi drive, Express card, Multimedia bay battery, 1D/2D imager barcode reader and 2nd storage are mutually exclusive options.
- IV. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller is required to configure with Intel® Core™ i5/i7 processor, Dual battery, FHD LCD display with capacitive multi-touch screen, and 120W AC adapter.
- V. Factory option. Not user swappable.
- VI. HF RFID reader and express card are mutually exclusive.
- VII. Trained user swappable.
- VIII. Units with 4G LTE option comes with an embedded SIM card slot.
- IX. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- X. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XI. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass.
- XII. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XIII. Weight and dimensions vary from configurations and optional accessories.
- XIV. Drop test results vary from configurations and optional accessories.
- XV. Tested by an independent third-party test lab following MIL-STD-810H.
- XVI. For S410 optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVII. Available when barcode reader option is selected.
- XVIII. Models require either embedded or standalone GPS module.
- XIX. Havis vehicle dock is e-mark certified.
- XX. Do not support the configurations with discrete graphics card.
- XXI. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	USB 3.0 x 1 USB 2.0 x 3
LAN	1	1
HDMI 2.0	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.